



GROUND CABLE TERMINATION DETAIL

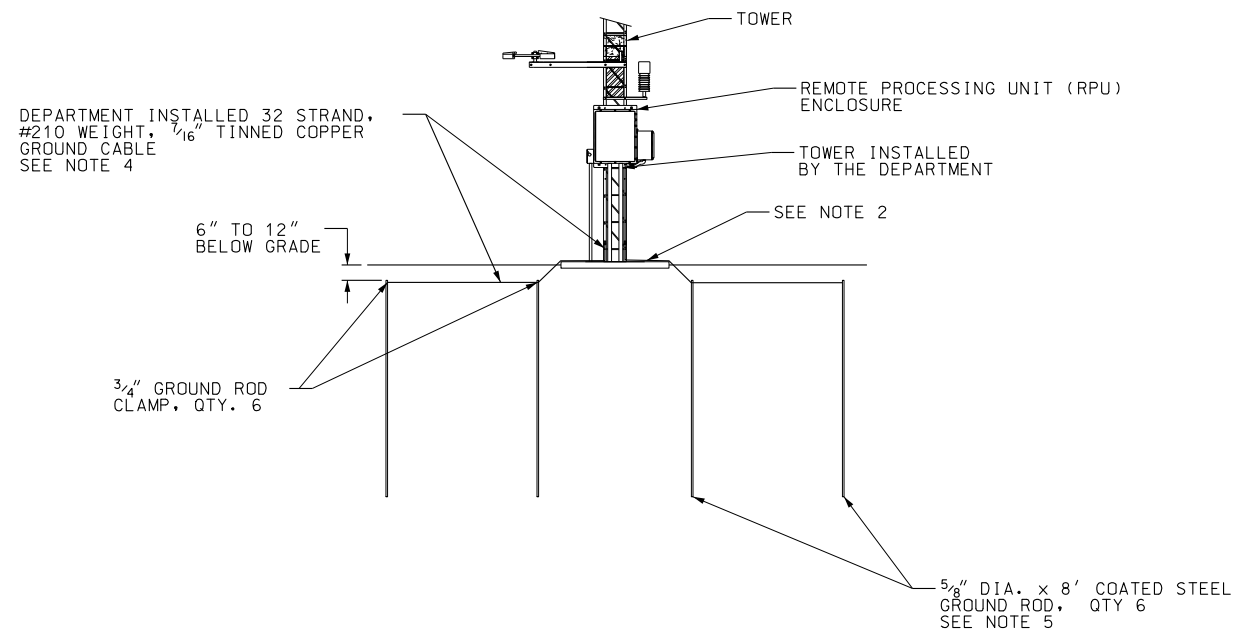

B GROUND CABLE TERMINATION DETAIL
AT 17 PROFILE VIEW

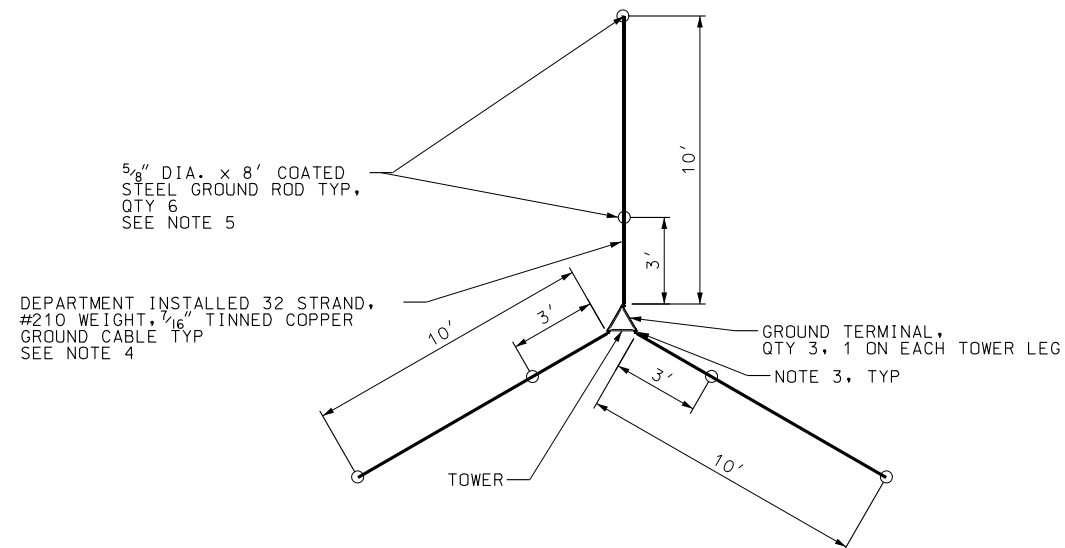

C GROUND CABLE TERMINATION DETAIL
AT 17 PLAN VIEW

- NOTES:

1. DEPARTMENT WILL PLACE GROUND CABLES ON THE TOP OF CONCRETE PAD.
2. DEPARTMENT WILL ANCHOR GROUND CABLES FLAT AGAINST CONCRETE PAD WITH SUITABLE CLAMPS/ANCHORS. EXCESS WIRE TO BE ATTACHED TO TOWER BY THE DEPARTMENT.
3. INSTALL GROUND RODS FOR ALL 3 LEGS OF THE TOWER. DEPARTMENT WILL INSTALL GROUND WIRE.
4. DO NOT CUT WIRE, SHOULD BE CONTINUOUS TO EACH GROUND ROD.
5. STAKE OR FLAG THE LOCATIONS OF ALL INSTALLED GROUND RODS.

[illegible]

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SECTION 100000

RECOMMENDED FOR APPROVAL _____ FEB. 22, 2007
DATE

CHAIRMAN STANDARDS COMMITTEE _____ FEB. 22, 2007
APPROVED DATE

DEPUTY DIRECTOR _____

GROUND ROD INSTALLATION AND TOWER GROUNDING

STANDARD DRAWING TITLE

STD DWG
AT 17

SUPPLEMENTAL DRAWING