




DUAL PERPENDICULAR RAMP AT CORNER OPTION

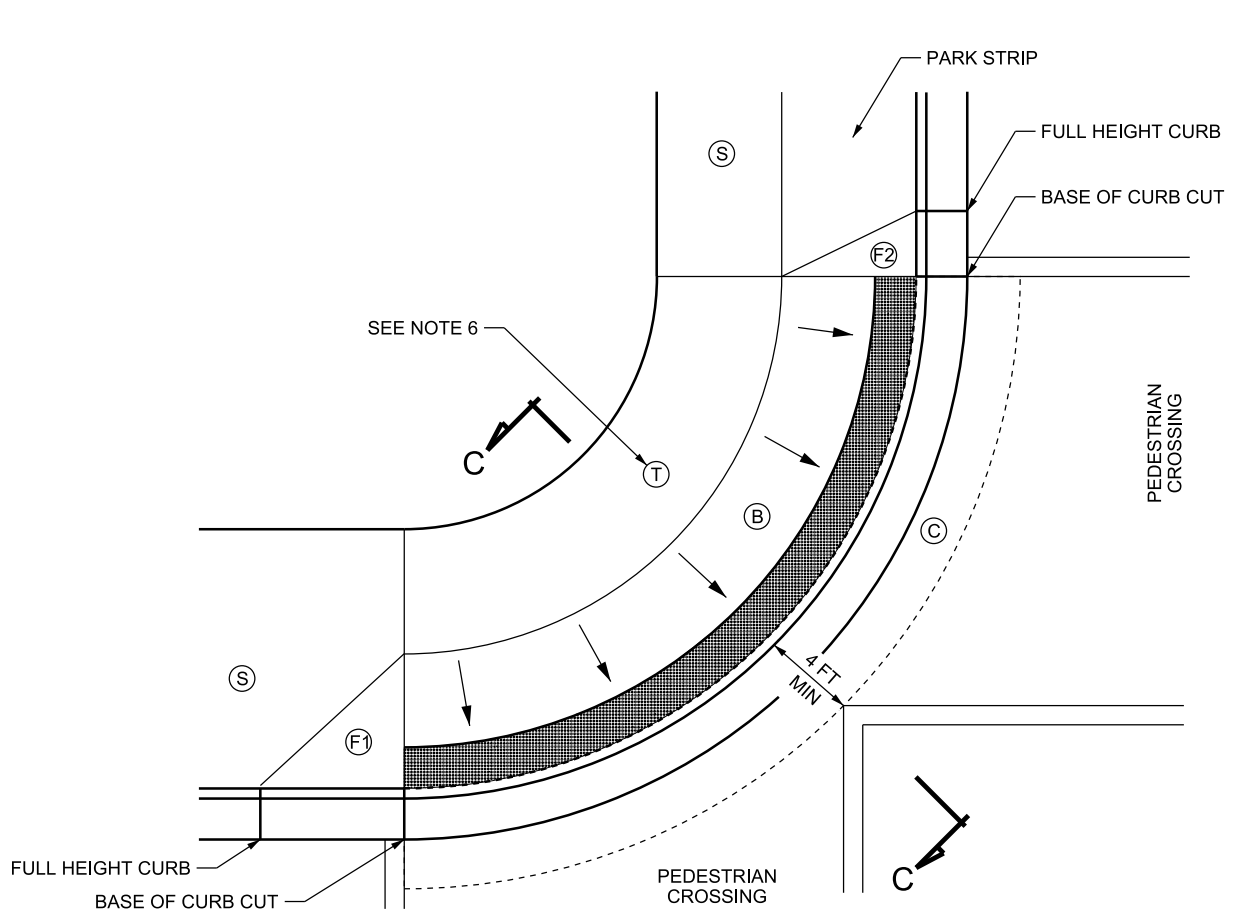

BLENDED TRANSITION RAMP AT CORNER OPTION

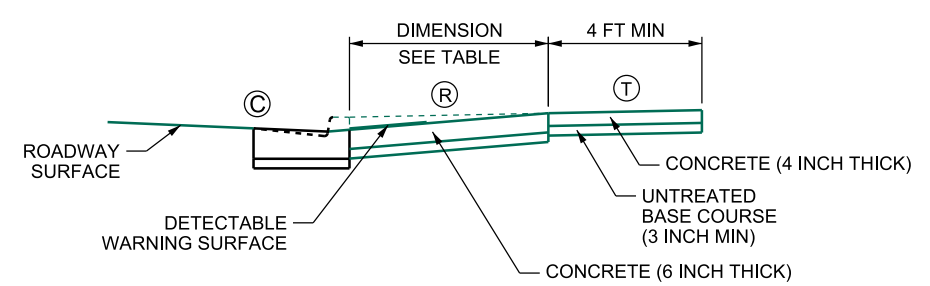


SECTION A-A

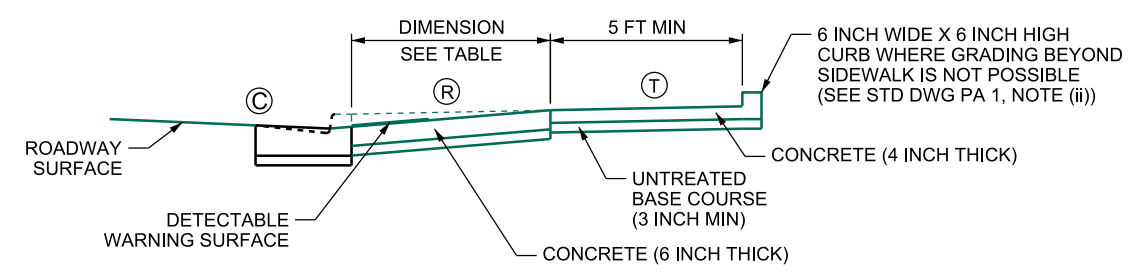

SECTION B-B

MIN CONSTRUCTABLE DIMENSIONS		
CURB TYPE	SLOPE	MINIMUM DIMENSION (FT)*
B1-A	5%	11.6
B1-A	8.3%	5.2
B2-A	5%	15.75
B2-A	8.3%	7.2
M1-A	5%	5.75
M1-A	8.3%	2.3

* MIN LENGTHS ASSUME 2% SIDEWALK/PARKSTRIP CROSS SLOPE

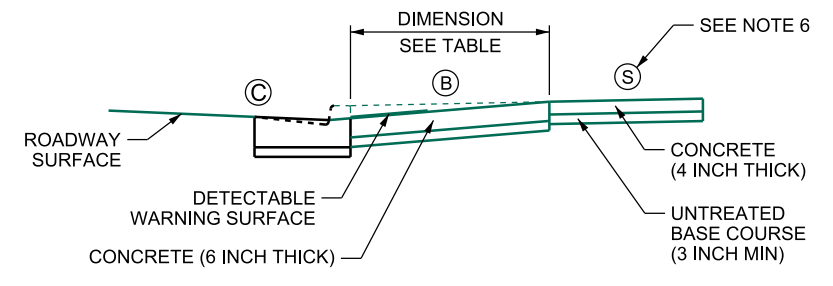

SECTION C-C

NOTES:

- REFER TO STD DWG PA 1 FOR DIMENSION TABLE AND GENERAL NOTES.
- REFER TO STD DWG PA 2 FOR DETECTABLE WARNING SURFACE DETAILS.
- REFER TO STD DWG PA 3, DETAIL A FOR CLEAR SPACE DETAIL.
- RAMPS SHOWN ON THIS DRAWING ARE ACCEPTABLE FOR USE AT MID-BLOCK OR CORNER INSTALLATIONS.
- PROVIDE TOOLED JOINTS ON ALL GRADE BREAKS.
- ADDITIONAL AREA FOR TURNING SPACE IS NOT REQUIRED WHERE THE RUNNING SLOPE OF THE BLENDED TRANSITION IS 2% OR FLATTER. (PROWAG R302.6)

SUPPLEMENTAL DRAWING

NO.	DATE	APPR.	REMARKS
1	2/22/18	CGW	NEW DRAWING

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE COUNTY, UTAH

RECOMMENDED FOR APPROVAL
CHAIRMAN STANDARDS COMMITTEE
APPROVED

DATE: FEB. 22, 2018
DATE: FEB. 22, 2018

DEPUTY DIRECTOR

PERPENDICULAR AND BLENDED TRANSITION PEDESTRIAN ACCESS

STANDARD DRAWING TITLE

STD. DWG. NO. PA 4

DGN File: D:\StandardSpecs\Section\2017\Section\All_Supp_Issues\Issue 4 02-22-2018\Drawings\PA 04.dgn 07-MAR-2018