




DGN File: D:\StandardSpec\Section\2017\Section\All_Supp_Issues\Issue_4_02-22-2018\Drawings\PA_05.dgn
07-MAR-2018

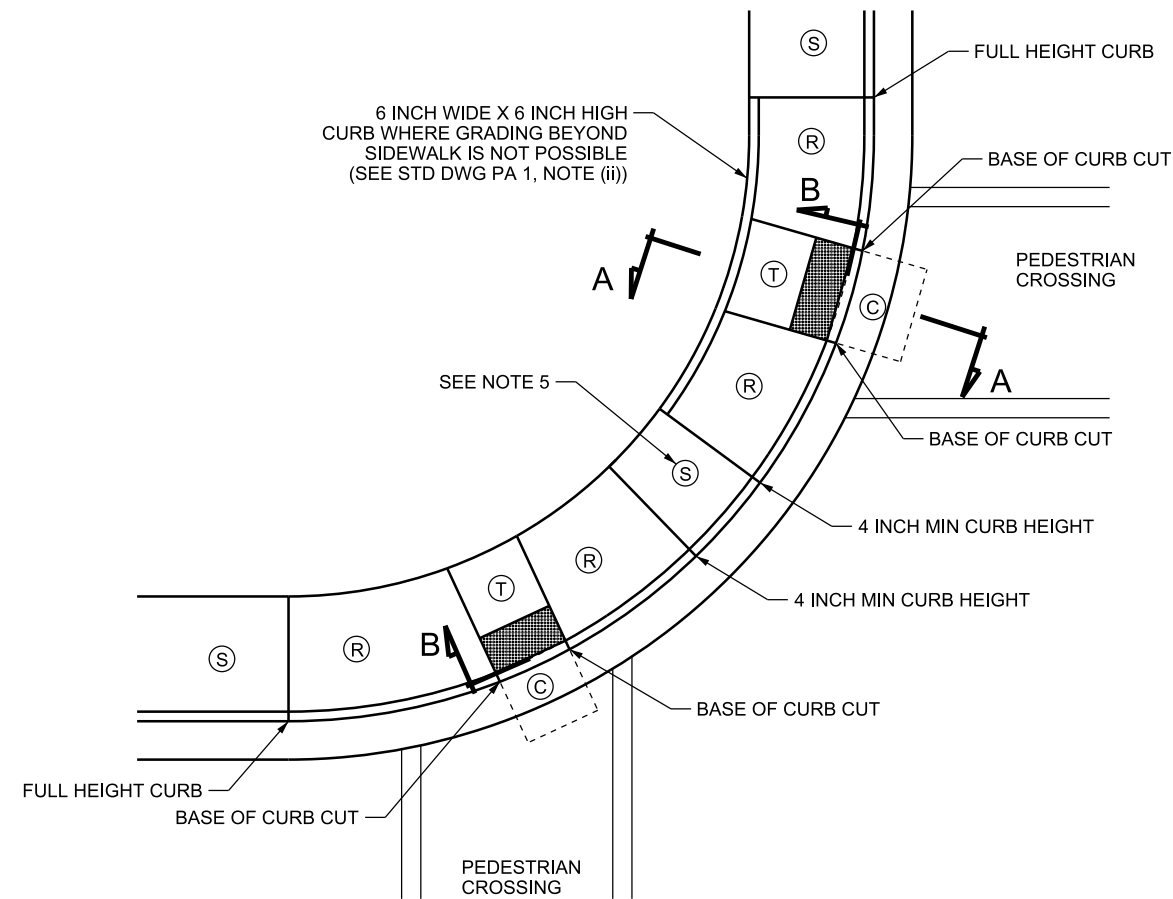

DUAL PARALLEL RAMP AT CORNER OPTION

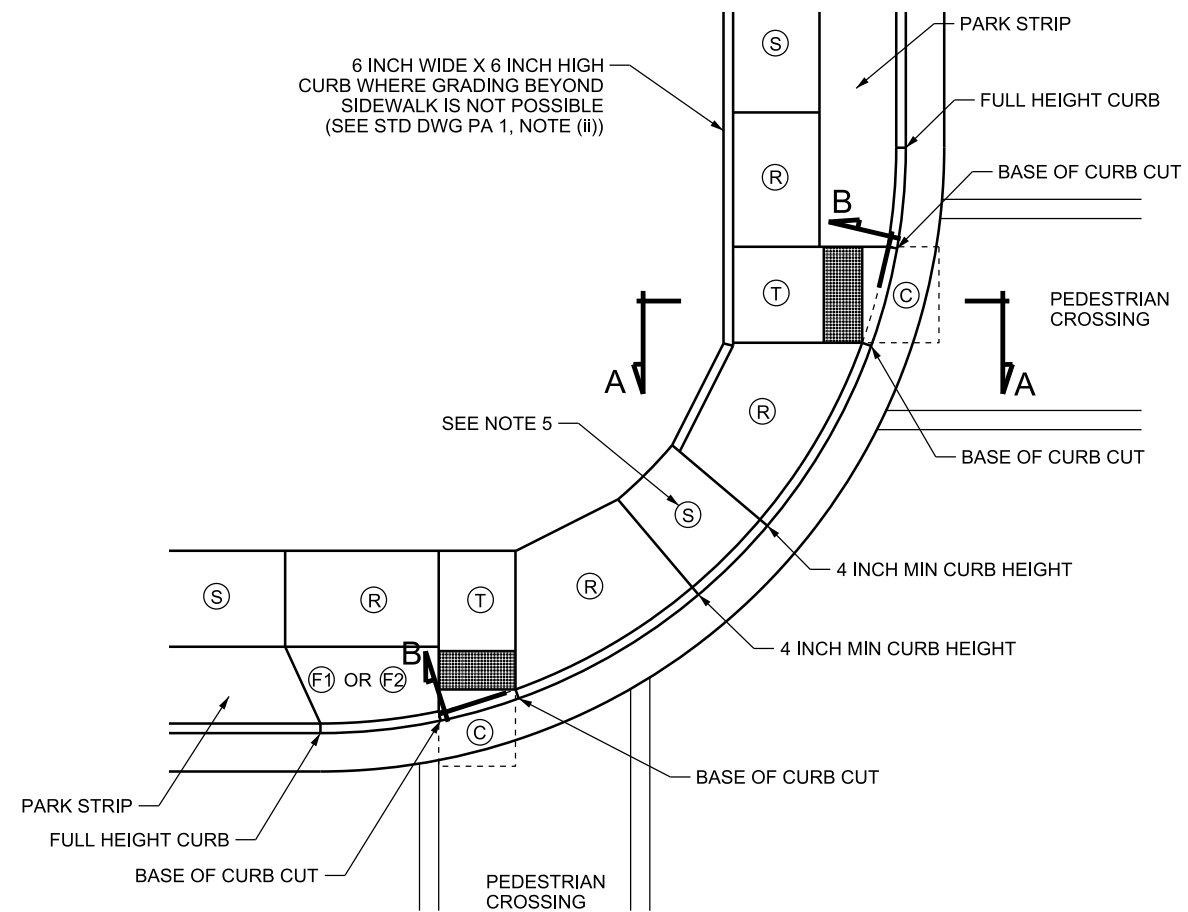


DUAL PARALLEL RAMP AT CORNER OPTION

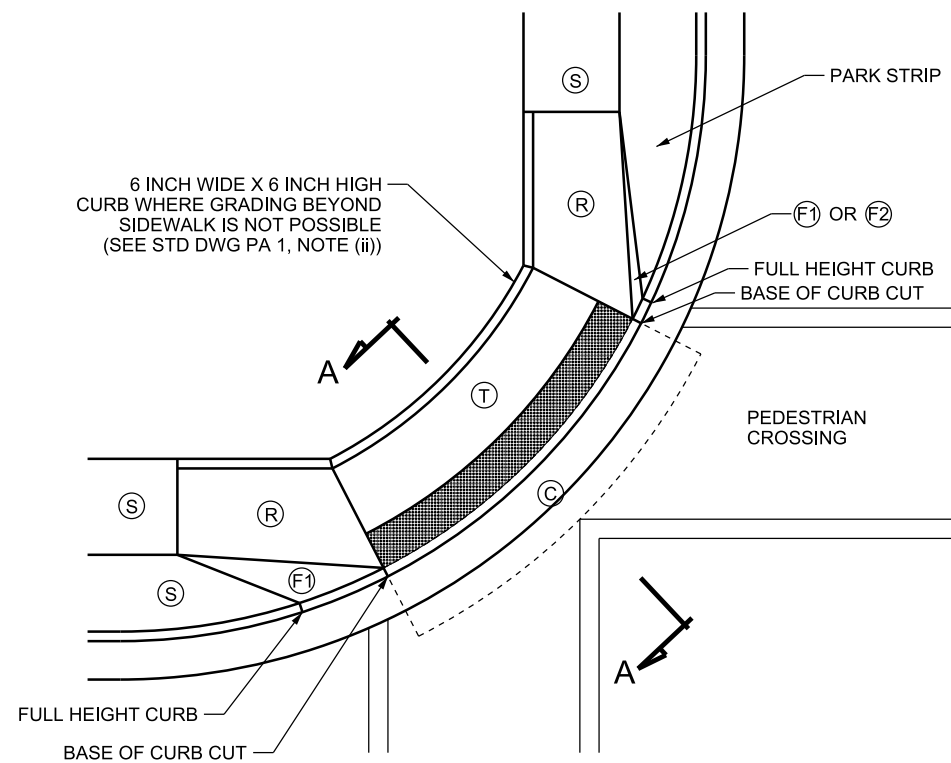


SINGLE DIAGONAL CORNER (APEX) RAMP OPTION

SEE STD DWG PA 1, NOTE C

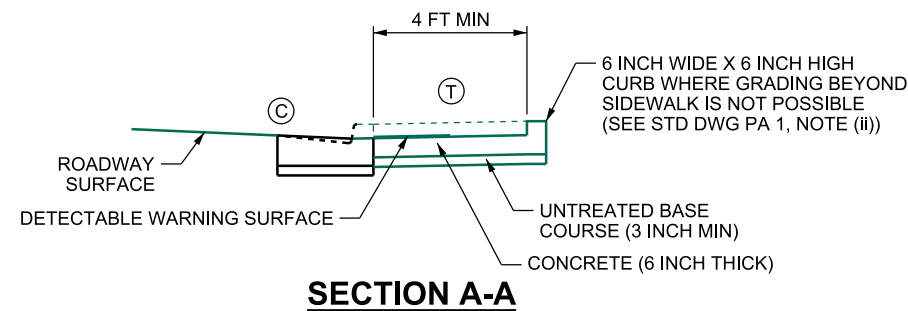

SECTION A-A

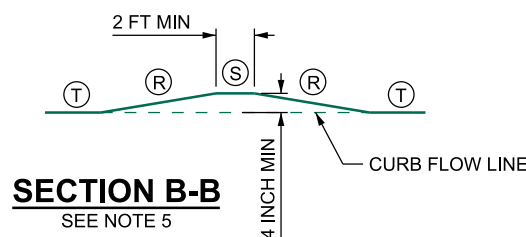

SECTION B-B

SEE NOTE 5

NOTES:

1. REFER TO STD DWG PA 1 FOR DIMENSION TABLE AND GENERAL NOTES.
2. REFER TO STD DWG PA 2 FOR DETECTABLE WARNING SURFACE DETAILS.
3. REFER TO STD DWG PA 3, DETAIL A FOR CLEAR SPACE DETAIL.
4. RAMPS SHOWN ON THIS DRAWING ARE ACCEPTABLE FOR USE AT MID-BLOCK OR CORNER INSTALLATIONS.
5. PROVIDE A MINIMUM 2 FT WIDE SPACE BETWEEN ADJACENT RAMPS. THE CURB HEIGHT OF THIS SPACE IS A MINIMUM 4 INCHES TALL FROM CURB FLOW LINE TO TOP OF CURB.
6. PROVIDE TOOLED JOINTS ON ALL GRADE BREAKS.

SUPPLEMENTAL DRAWING

REVISIONS

NO.	DATE	APPR.	REMARKS
1	2/22/18	CGW	NEW DRAWING

UTAH DEPARTMENT OF TRANSPORTATION
 STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
 SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL
[Signature]
 CHAIRMAN STANDARDS COMMITTEE
 APPROVED
 RECOMMENDED FOR APPROVAL
[Signature]
 DEPUTY DIRECTOR

PARALLEL PEDESTRIAN ACCESS

STD. DWG. NO.

PA 5

STANDARD DRAWING TITLE