


Concrete paving
between 12600 South and 11400 South



Growing Better Together

Road Construction

Update

June 2007

c/o Michael Baker Jr., Inc.
6955 Union Park Center, Suite 370
Midvale, UT 84047



Road Construction Update

June 2007

Concrete paving between 12600 South
and 11400 South begins the week of July 9th

This newsletter outlines important information you need to understand about the sequencing steps of this pavement operation. For example, you will be notified about one week prior to concrete paving in front of your property. All vehicular, recreational, or other equipment that you will need access to during the next 3-4 weeks will need to be relocated at this time because residents will not have access to their property for up to 3-4 weeks. Businesses will remain open. Businesses with multiple accesses will have a single access, and those with a single access will have ½ of the access closed at a time or in some cases a temporary access will be provided. Concrete paving will be done at night. Once placed, the joints in the concrete will be saw cut the following day. U-turn movements at 12600 South and 11400 South will be the only way to get across to the other side of Redwood Road.

Construction crews will assist disabled and elderly individuals as necessary.
To arrange for assistance, please call the
Redwood Road Project Hotline (801) 597-2464
at least 7 days in advance.



Hotline	(801) 597-2464
Website	www.udot.utah.gov/redwood104to126

What can I expect?

Step 1 and 2: Week of July 9th to July 20th






- All traffic will operate on asphalt pavement. Southbound traffic will be on the west side of Redwood Road (C) and northbound traffic will be on the east side (B).
- Center lanes will be paved first (A). The first path (Step 1) will begin at 12600 South and proceed northbound to 11400 South. Equipment will return to 12600 South and proceed northbound to 11400 South for the second path (Step 2).
- Access across the middle section of Redwood Road is not allowed at this point between 12600 South and 11400 South. U-turns will be allowed at 11400 South and 12600 South.

Step 3: Begin approximately July 25th

- Once concrete has cured, southbound traffic will be shifted to the east side of the new concrete section (A). Parking will be allowed on the west side of the new concrete section (A).
- Northbound traffic will continue to use the asphalt section on the east side of Redwood Road (B).
- The west side of Redwood Road will be paved starting at 12600 South (C). Paving will continue at night and saw cutting the following day. Once the new concrete has cured, the ground will be prepared and curb and gutter will be installed.
- Access across the middle section is still restricted (A). **Businesses will be open.** Businesses on the west side (C) will have a single access at this time. Businesses with only one access may have ½ of the access closed at a time or in some cases a temporary access will be provided.
- **Residential access to the west side will be prohibited.** Notices will be provided about a week in advance of this date to allow time to remove equipment from properties. At this time there will be an 11 inch drop from the concrete to the dirt surface and rebar will also be sticking out from the concrete. Construction crews will assist disabled individuals as necessary. To arrange for assistance, please call the Redwood Road Project Hotline.


Step 4: Begin the week of July 30th

- Placement of curb and gutter outlined in Step 3 will continue concurrently with this step.
- Once the concrete pavement has cured, both directions of traffic will be shifted to the center of the concrete section (A and C) and residential parking will be allowed on both sides of the new concrete (A) and (C).
- The east side of Redwood Road (B) will be paved starting at 12600 South. Paving will continue at night and saw cutting the following day. Once the new concrete has cured, the ground will be prepared and curb and gutter will be installed.
- Access across the middle section is still restricted. **Businesses will be open.** Businesses on the east side of Redwood Road (B) will have a single access at this time. Businesses with only one access may have ½ of the access closed at a time or in some cases a temporary access will be provided.
- **Residential access to both the west side and east side will be prohibited.** Notices will be provided about a week in advance of this date to properties on the east side to allow time to remove equipment from properties. At this time there will be an 11 inch drop from the concrete to the dirt surface and rebar will also be sticking out from the concrete. Construction crews will assist disabled individuals as necessary. To arrange for assistance, please call the Redwood Road Project Hotline.
- Concrete pavement is expected to be complete by August 9th. Once the new concrete has cured, the ground will be prepared and curb and gutter on the east side will be installed. As soon as the curb and gutter has cured, residents will have access to their properties. The west side will be cured in advance of the east side.

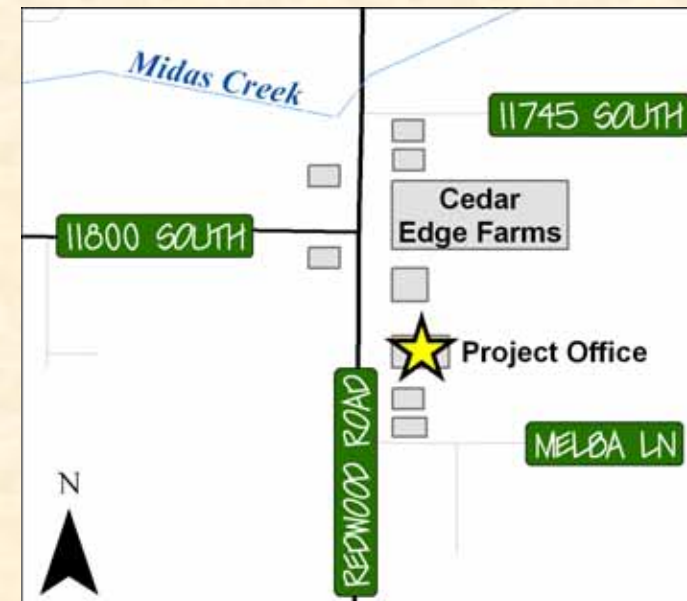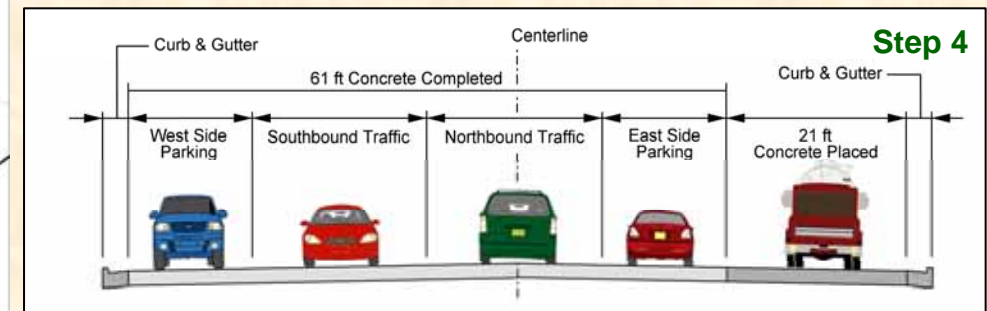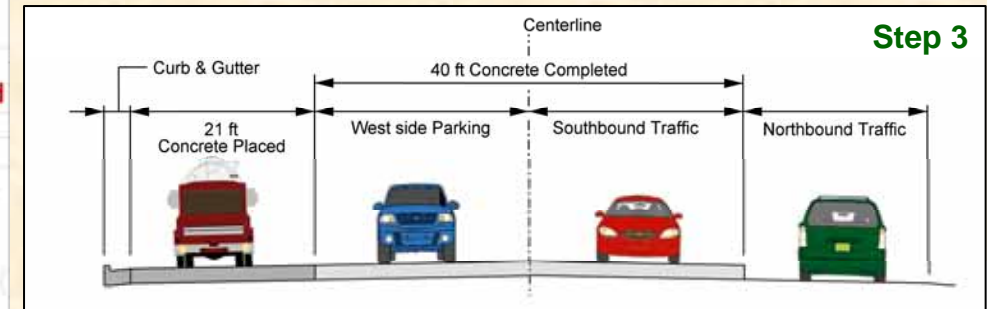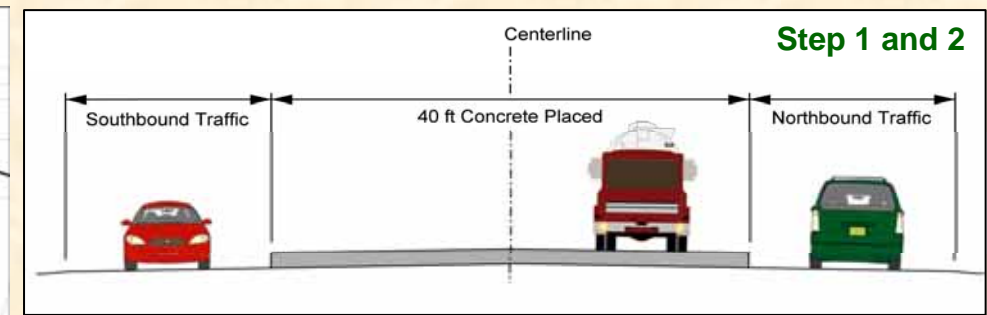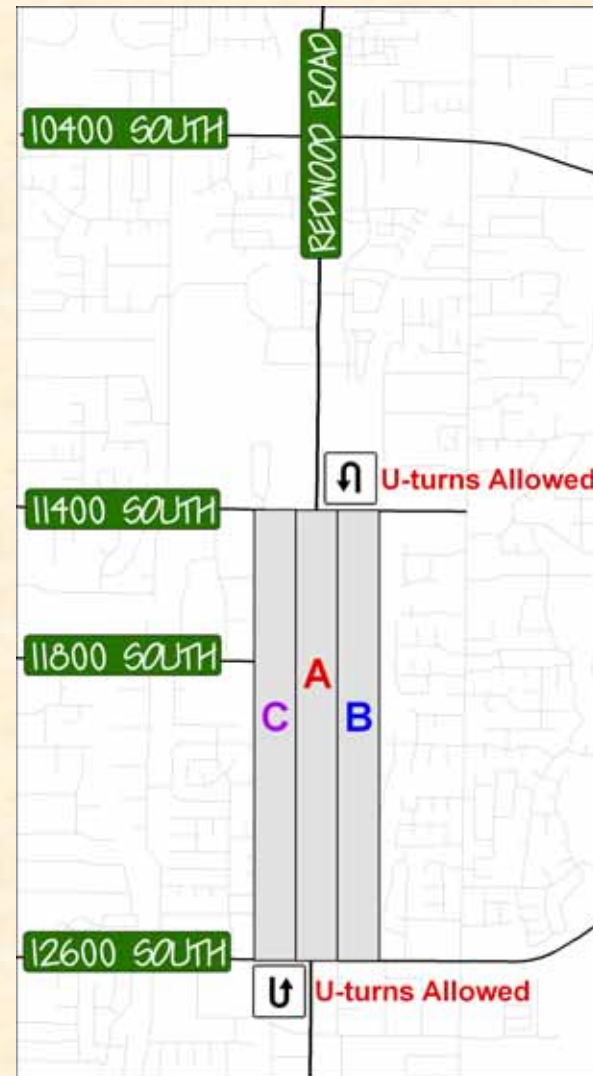

For further information stop by the project office located at **11851 South Redwood Road** any time during business hours prior to July 9th or call the project hotline.

Don't forget we need your help to identify disabled or elderly individuals who will need special assistance!



The paving schedule is subject to change so watch for further notices and check the weekly construction updates and project website for the most up to date information.