


## MEDIAN HAZARD PROTECTION WITH CABLE BARRIER

SEE NOTE 2

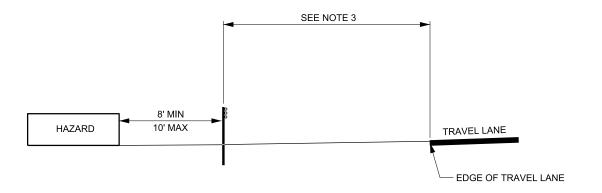

## SECTION A-A SEE NOTE 3

## NOTE

- 1. MINIMUM 8 FT DISTANCE FROM FACE OF HAZARD TO CABLE BARRIER REQUIRED.
- 2. USE 10 FT POST SPACING WHEN CABLE IS GREATER THAN 10 FT FROM HAZARD.
- 3. REFER TO STD DWG BA 5BA & BA 5B2 FOR OFFSET AND SLOPE REQUIREMENTS. SEE PLAN SET FOR PROJECT OFFSET REQUIREMENTS.
- 4. FLARE RATE: FLATTER OR EQUAL TO 30:1 DESIRABLE, 20:1 MINIMUM ACCEPTABLE.
- 5. NOT PERMITTED TO PROTECT BRIDGE COLUMNS.

SUPPLEMENTAL DRAWING

UTAH DEPARTMENT OF TRANSPORTATION STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

CABLE BARRIER MEDIAN HAZARD PROTECTION

STD. DWG. NO. BA 5J1

SET-2013