




D:\N:\Standard Drawings\Imperial\2017 Approved\Suppl\B Issues\Suppl\B Approved August - 2019\Backup\ST01.dgn 08-SEP-2019

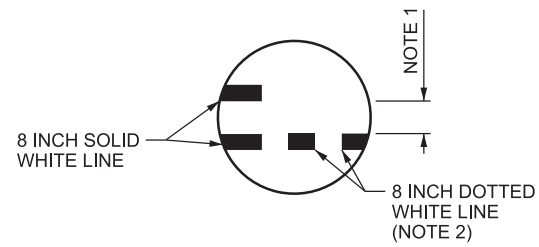


HOV LANE STRIPING DETAIL FOR TRANSITION FROM PROHIBITED MOVEMENT TO ACCESS OPENING

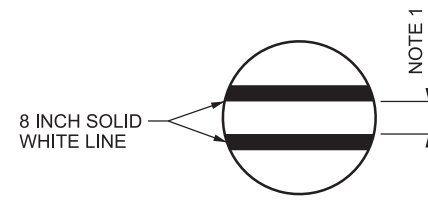


HOV LANE STRIPING DETAIL FOR PROHIBITED MOVEMENTS

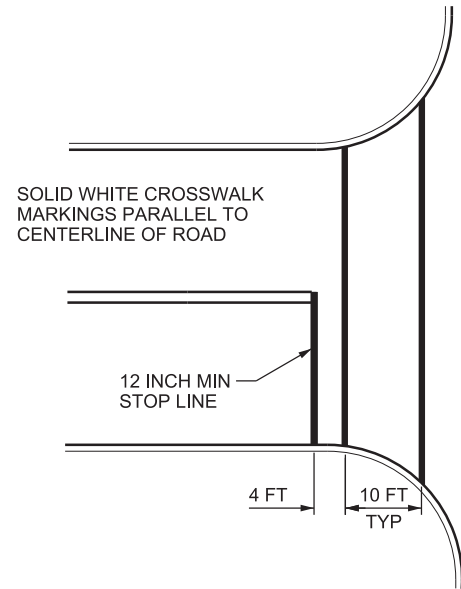

STOP OR SIGNAL CONTROL

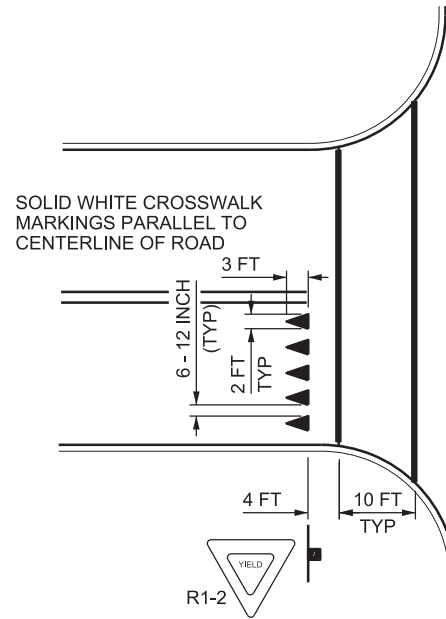


YIELD CONTROL

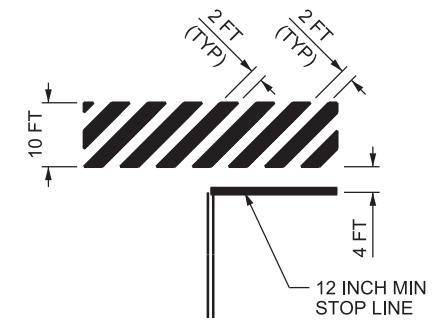

SPECIAL EMPHASIS CROSSWALK

SOLID WHITE DIAGONAL LINES AT 45° TO DIRECTION OF TRAVEL

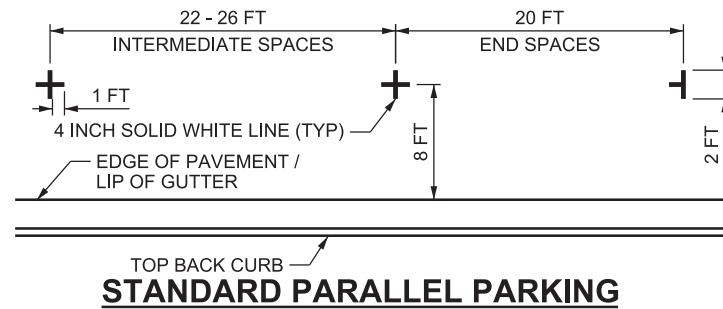

STANDARD PARALLEL PARKING

PAVEMENT MARKING LINE DIMENSIONS			
TYPE	WIDTH (INCHES)	LENGTH (FT)	GAP (FT)
SOLID LINE	4	CONTINUOUS	N/A
SOLID LINE	8	CONTINUOUS	N/A
BROKEN LINE	4	10	30
LANE DROP	8	3	9
DOTTED LINE	4	2	6
DOTTED LINE	8	2	6

NOTES:

- USE 32 INCH (INSIDE TO INSIDE) SEPARATION BETWEEN DOUBLE SOLID WHITE LINES.
- PLACE 8 INCH DOTTED WHITE LINE AS THE EXTENSION OF THE 8 INCH SOLID WHITE LINE ADJACENT TO THE GENERAL PURPOSE LANE.
- MAINTAIN 4 INCH SPACE BETWEEN TWO 4 INCH SOLID YELLOW LINES OR BETWEEN 4 INCH SOLID YELLOW LINE AND 4 INCH BROKEN YELLOW LINE.

SUPPLEMENTAL DRAWING

REVISIONS			
NO.	DATE	APPR.	REMARKS
1	8/29/19	MRB	MOVED ALL DESIGNER INFORMATION TO THE UDOT RDM. DELETED ST 4 TO ST 18

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL

CHAIRMAN STANDARDS COMMITTEE APPROVED

DEPUTY DIRECTOR

DATE: AUG 29, 2019

TYPICAL PAVEMENT MARKINGS

STANDARD DRAWING TITLE

STD. DWG. NO. **ST 1**