

U.S.191 Indian Canyon

RENEWED

MP 271 to 282.2


UDOT to Resurface 11-mile Section of Indian Canyon

Motorists and Semi-truck Drivers Should Expect Travel Delays

Beginning June 12, 2017, and continuing through mid-August 2017, the Utah Department of Transportation (UDOT) will resurface an 11-mile section of U.S.191 in Indian Canyon. The project will begin at Jones Hollow (approximately milepost 271) and will run to the north.

Construction crews will use a process called cold-in-place recycling (CIR). The CIR process allows workers to reuse the existing asphalt surface by grinding off a specific depth of the pavement, mixing the asphalt with a recycling agent, and repaving the road with the reprocessed asphalt.

Once the recycled layer is placed, a layer of new asphalt is placed on the recycled portion and then crews will place a final chip seal on the new asphalt roadway.

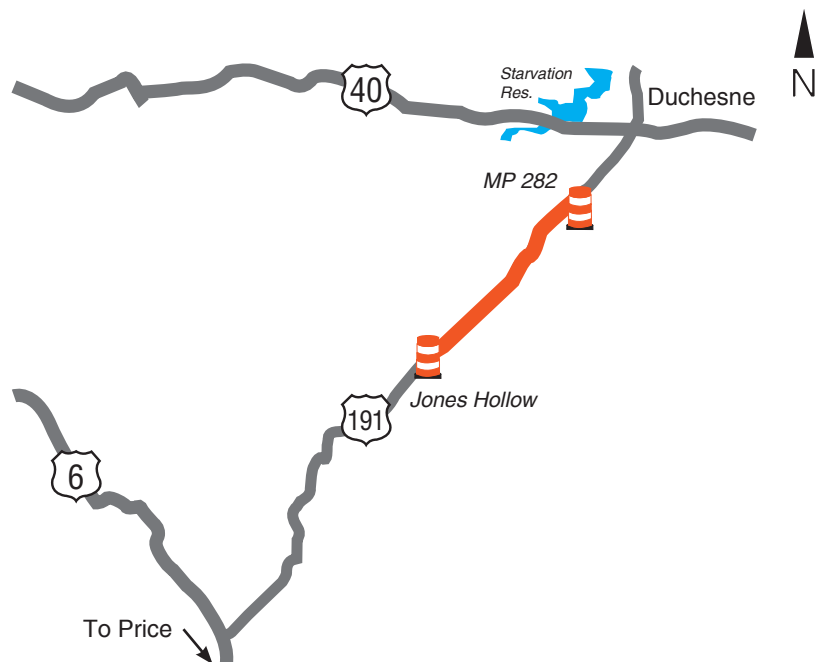

Anticipated Travel Delays

To complete the work, crews will close one lane of traffic between 6 a.m. and 7 p.m. Monday through Thursday and from 6 a.m. to 3 p.m. on Friday. Flaggers will be posted at each end of the work zone to direct drivers safely through the project area. The speed limit will be reduced and motorists should anticipate travel delays of up to 15 minutes. Please slow down when driving through construction zones and watch out for crews working nearby.

For more information about this project, please contact the project representative at 877-495-4240, or via email at udotregion3@utah.gov. Work schedules are subject to change due to inclement weather, equipment problems, or emergency situations.