Utah Department

1995 TRAFFIC ON UTAH HIGHWAYS

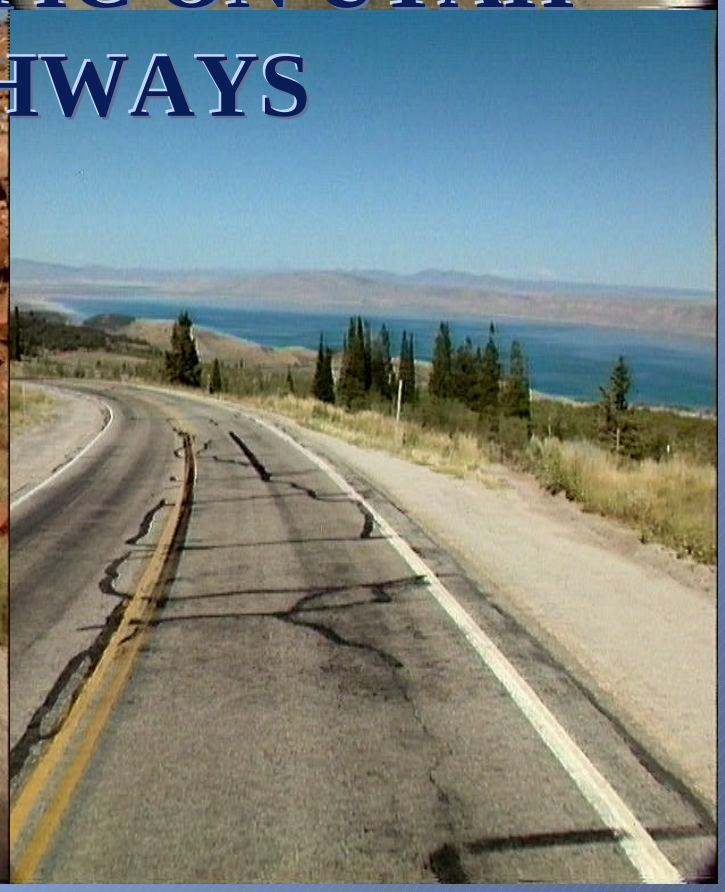

# of Transportation

INTRODUCTION

This book contains various traffic statistics collected by the Transportation Monitoring Unit and developed and analyzed by the Data Analysis Section of the Program Development Division of the Utah State Department of Transportation. These statistics are intended for use by transportation management, business, and the public. The traffic information is used in planning, programming, highway design, maintenance, traffic control, and general administration of highway systems.

The traffic information contained in this book includes Annual Average Daily Traffic (AADT), Annual Average Weekday Traffic (AWDT), Annual Average Weekend Traffic (AWET), and commercial truck statistics on road sections of the State Highways, Federal-Aid Urban Local Highways, and Federal-Aid Secondary Local Highways. These statistics are developed by the Data Analysis Section through the use of the following counting stations:

1. 81 continuously operated permanent automatic traffic recording stations (ATR's) provided by the Utah Department of Transportation;
2. 10 continuously operated permanent automatic recording stations provided by the United States Department of the Interior, National Park Service;
3. 4 continuously operated permanent automatic recording stations provided by Colorado, Idaho, and Wyoming Departments of Transportation;
4. 5,250 (approximately) short-time counts for the Highway Performance Monitoring System (HPMS) provided by the Utah Department of Transportation;
5. 4 seasonal counts provided by Washington County.

The **AADT** represents traffic in **both directions** of travel for **Sunday through Saturday and is the average for that particular section of route** (page **AADT-1**). The routes are sectioned according to:

a. Major intersections.
b. Sections where traffic volumes show a substantial increase or decrease.
c. Beginning and ending of all incorporated limits and urban boundaries.
d. County lines.

The main section of this **book lists** the

a. route code,
b. section beginning accumulative mileage,
c. section ending accumulative mileage,
d. section length,
e. section description, and
f. AADT's for 1995 and 1994.

The section description indicates a **discontinuity or broken route** (end of a route and the beginning of a new route); end of a state line and the beginning of a new state line; the end of a county line and the beginning of a new county line is **indicated by a dash**. The beginning of a new route or the resumption of a route is indicated by the placement of an asterix in the column directly across from of the description.

In addition to the AADT's, the second section of the book contains **Average Daily Traffic (AADT - Sunday through Saturday), Average Weekday Traffic (AWDT - Monday through Friday), and Average Weekend Traffic (AWET - Saturday and Sunday).** The **AWDT's and AWET's** are derived in the same manner as the AADT's, but represent **weekday or weekend traffic** only **(page AWDT-1)**. The third section of the book contains **Commercial Truck Statistics for Utah's Interstates and Freeways** (pages Trucks-1 through Trucks-7). **These numbers represent the number of trucks in each of the classes.** The fourth section contains statistics from UDOT's permanent counters **(pages PERM-1 through PERM-86)**. This contains additional **statistics for Automatic Traffic Recorders including**:

1. Average traffic by day of week for each month;
2. Average weekday traffic by months;
3. Average day of week traffic by months;
4. Percent the average day is of the average weekday;
5. Percent the monthly daily average is of the yearly daily average.

Appendix A contains a cross **reference guide for city streets in urban areas identifying street names and their equivalent route identifiers**. This is a very basic cross reference, but should help with the state's major roadways. In the future, there will be a more detailed cross reference **(pages A-1 through A-12)**. Appendix B contains **an index of abbreviations used in this book (pages B-1 through B-2)**. Appendix C contains **a listing of individuals to contact for further information about traffic and road statistics.** Finally, this book also

contains **<u>four traffic maps</u>** detailing permanent traffic counter locations and AADT's throughout the state. The state is divided as follows:

1. Sheet 1 - Utah in its entirety;
2. Sheet 2 - North Central Utah;
3. Sheet 3 - Ogden Urbanized Area;
4. Sheet 4 - Salt Lake Urbanized Area;
5. Sheet 5 - Provo/Orem Urbanized Area;
6. Sheet 6 - Other Urban and Small Urban Areas;
7. Sheet 7 - Interchange Map;
8. Sheet 8 - Interchange Map continued.

INSTRUCTIONS FOR USING THIS BOOK

In this publication, the highway systems are arranged according to a number or letter code. This code is located in the first column of main sections of this book (pages AADT, AWDT, and Trucks). It indicates whether the route is on the State Highway System, Federal-Aid Secondary System, or Federal-Aid Urban System. All State System names are comprised of a six character code beginning with "A" (e.g. State Highway Route 6 is shown as A00006 on page AADT -1 of this book). The Federal-Aid Secondary System names are comprised of a four digit numeric code beginning with "0" (e.g. the Federal-Aid Secondary Route 0102 is shown as 0102 on page AADT-78 of this book). The Federal-Aid Urban System names are comprised of a four digit numeric code beginning with a number other than "0" (e.g. the Federal-Aid Urban Route 1006 is shown as 1006 on page AADT-88 of this book).

If the code number for a street is not known, simply look in Appendix A "City Street Index Guide." First, go to the area the street resides. Second, find the street name. Third, look in the second and third column for the possible route codes. Fourth, refer to pages (AADT-1 through AADT-78) for state routes (codes beginning with "A"); pages AADT-78 through AADT-87 for federal-aid secondary routes (codes beginning with "0"); or pages AADT-87 through AADT-122 for federal-aid urban routes (codes beginning with "1", "2", "3", "4", "5", "6", "7", "8", or "9"). Fifth, look down the first column of the page until you reach the desired route (all routes are listed in ascending order). Once the route has been located, read the mile points or description until the desired section is found. The last two columns on the line will display the 1995 and 1994 AADT's for that route section. The AADT's, AWDT's, and AWET's all represent an average number of vehicles traveling between the starting and ending description or the section length. This process above can also be used for AWDT's, AWET's, and commercial truck statistics.

An alternative method for finding a highway system route code is to refer to the traffic maps located in a pocket at the back of this book. The maps indicate all routes on the various highway systems using the following symbols:

a. Beehive - State Routes (SR the "A" routes)
b. Oval - Federal-Aid Urban (FAU)
c. Rectangle - Federal-Aid Secondary (FAS)

First, find the map containing the part of Utah desired. Second, check the appropriate map for the highway system and route number, the 1995 AADT will be listed on the map. Third, for additional information turn to the main section of the book and follow steps 4-5 previously listed.

SPECIAL THANKS

We would like to express special thanks to Robert Allen, Billy Frashure, Mark Fry, Steve Hoffman, Doug Malone, Nick Purin, and Paul Urry for maintaining and placing the automatic traffic recorders and other traffic equipment. We would also like to express our thanks to Doug Logsden and Scott Nay for use of the Photolog images.

1995 AND 1994

ANNUAL AVERAGE DAILY TRAFFIC (AADT)

Sunday -Saturday

TRAFFIC ON UTAH HIGHWAYS 1995

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00006	**0.00**	**78.72**	**78.72**	*	**NEVADA - UTAH STATE LINE**	**530**	**505**
	78.72	82.13	3.41	*	LOCAL ROAD WEST OF HINCKLEY	575	550
	82.13	83.88	1.75		WEST INCORPORATED LIMITS HINCKLEY	880	840
	83.88	84.15	0.27		EAST INCORPORATED LIMITS HINCKLEY	2,415	2,305
	84.15	88.45	4.30		JUNCTION SR 257	4,325	4,130
	88.45	89.67	1.22		WEST INCORPORATED LIMITS DELTA	5,985	5,715
	89.67	90.95	1.28		JUNCTION SR 50	5,985	5,715
	90.95	100.03	9.08		EAST INCORPORATED LIMITS DELTA	4,185	4,135
	100.03	104.32	4.29		JUNCTION SR 174 ROAD TO INTERMOUNTAIN POWER PLANT	3,035	3,000
	104.32	105.63	1.31		SOUTH INCORPORATED LIMITS LYNNDYL	3,035	3,000
	105.63	105.67	0.04		JUNCTION SR 132	2,035	2,010
	105.67	107.86	2.19		NORTH INCORPORATED LIMITS LYNNDYL	2,035	2,010
	107.86	121.86	14.00		MILLARD - JUAB COUNTY LINE	2,035	2,010
	121.86	137.06	15.20		JERICO JUNCTION FAS 273	1,130	1,005
	137.06	138.83	1.77		Y CONNECT TO SR 36	1,130	1,005
	138.83	139.68	0.85		TINTIC JUNCTION SR 36	1,135	1,010
	139.68	141.30	1.62		WEST INCORPORATED LIMITS EUREKA	1,980	1,765
	141.30	141.44	0.14		EAST INCORPORATED LIMITS EUREKA	1,140	1,015
	141.44	150.36	8.92		JUAB - UTAH COUNTY LINE	1,140	1,015
	150.36	152.91	2.55		JUNCTION SR 68 ELBERTA	1,860	1,655
	152.91	153.75	0.84		WEST INCORPORATED LIMITS GOSHEN	2,520	2,015
	153.75	154.50	0.75		EAST INCORPORATED LIMITS GOSHEN	2,950	2,215
	154.50	158.58	4.08		WEST INCORPORATED LIMITS GENOLA	3,350	2,450

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00006	158.58	159.76	1.18	EAST INCORPORATED LIMITS GENOLA	2,565	1,665
	159.76	160.21	0.45	WEST INCORPORATED LIMITS SANTAQUIN	5,040	3,245
	160.21	160.76	0.55	WYE CONNECTION IN SANTAQUIN	12,850	7,220
	160.76	161.06	0.30	EAST INCORPORATED LIMITS SANTAQUIN-JUNCTION FAI 15	12,850	7,220
	161.07	162.47	1.41	* JUNCTION FAI 15 SPANISH FORK	11,915	10,875
	162.47	162.70	0.23	EAST INCORPORATED LIMITS SPANISH FORK	11,915	10,875
	162.70	163.23	0.53	JUNCTION SR 147 400 SOUTH	9,670	8,825
	163.23	165.58	2.35	SOUTHEAST INCORPORATED LIMITS SPANISH FORK	7,800	6,060
	165.58	166.32	0.74	JUNCTION SR 198	5,935	5,825
	166.32	167.17	0.85	MOARK JUNCTION	8,245	7,875
	167.17	175.90	8.73	EAST URBANIZED BOUNDARY	8,245	7,875
	175.90	183.24	7.34	JUNCTION SR 89 AT THISTLE	5,775	5,510
	183.24	192.78	9.54	SHEEP CREEK ROAD	5,775	5,510
	192.78	199.01	6.23	CENTER OF TUCKER	5,775	5,510
	199.01	199.90	0.89	UTAH - WASATCH COUNTY LINE	5,775	5,510
	199.90	201.65	1.75	SOLDIER SUMMIT	5,775	5,510
	201.65	204.75	3.10	WASATCH - UTAH COUNTY LINE	5,775	5,510
	204.75	210.75	6.00	JUNCTION SR 96 ROAD TO SCOFIELD	5,770	5,405
	210.75	218.59	7.84	UTAH - CARBON COUNTY LINE	5,770	5,405
	218.59	219.92	1.33	JUNCTION SR 191	6,385	6,095
	219.92	220.99	1.07	NORTH INCORPORATED LIMITS HELPER	6,385	6,095
	220.99	221.31	0.32	ROAD RIGHT TO SPRING CANYON	9,915	9,465
	221.31	221.96	0.65	JUNCTION SR 244 NORTH BUSINESS LOOP	12,115	11,565
	221.96	222.40	0.44	JUNCTION SR 244 SOUTH BUSINESS LOOP	13,590	12,975
	222.40	224.47	2.07	SOUTH INCORPORATED LIMITS HELPER	13,590	12,975
	224.47	224.99	0.52	JUNCTION SR 139	10,600	13,700

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00006	224.99	228.47	3.48		FAS 298 (OLD ROAD)	10,600	10,075
	228.47	228.59	0.12		WEST INCORPORATED LIMITS PRICE	10,600	10,075
	228.59	228.81	0.22		JUNCTION SR 55 WEST OF PRICE	9,895	9,500
	228.81	229.84	1.03		WEST URBANIZED BOUNDARY PRICE	9,895	9,500
	229.84	231.18	1.34		JUNCTION SR 10	11,185	10,965
	231.18	234.67	3.49		JUNCTION SR 55 & SOUTH INCORPORATED LIMITS PRICE	14,900	14,610
	234.67	238.36	3.69		WEST INCORPORATED LIMITS WELLINGTON	15,725	15,415
	238.36	244.78	6.42		EAST INCORPORATED LIMITS WELLINGTON	7,125	6,985
	244.78	250.51	5.73		JUNCTION SR 123 SUNNYSIDE JUNCTION	3,390	3,410
	250.51	266.96	16.45		CARBON - EMERY COUNTY LINE	3,390	3,410
	266.96	289.12	22.16		WOODSIDE - FAI 70 WEST OF GREEN RIVER	3,390	3,410
A00009	**0.00**	**1.11**	**1.11**	*	**JUNCTION FAI 15**	**10,500**	**8,745**
	1.11	3.62	2.51		HARRISBURG JUNCTION	9,290	8,745
	3.62	9.76	6.14		WEST INCORPORATED LIMITS HURRICANE	9,290	8,745
	9.76	10.97	1.21		JUNCTION SR 59 IN HURRICANE	11,000	10,040
	10.97	11.13	0.16		EAST INCORPORATED LIMITS HURRICANE	11,480	8,725
	11.13	12.44	1.31		WEST INCORPORATED LIMITS LA VERKIN	9,990	8,540
	12.44	13.16	0.72		JUNCTION SR 17 IN LA VERKIN	3,700	3,385
	13.16	16.86	3.70		EAST INCORPORATED LIMITS LA VERKIN	3,290	3,140
	16.86	18.88	2.02		WEST INCORPORATED LIMITS VIRGIN	3,290	3,140
	18.88	24.87	5.99		EAST INCORPORATED LIMITS VIRGIN	3,205	3,060
	24.87	28.81	3.94		WEST INCORPORATED LIMITS ROCKVILLE	3,250	3,100
	28.81	29.78	0.97		EAST INCORPORATED LIMITS ROCKVILLE	3,250	3,100
	29.78	32.59	2.81		WEST INC. LIMITS SPRINGDALE - EAST INC. LIMITS SPRINGDALE	3,520	3,360
	32.60	44.36	11.77	*	EAST LIMITS ZION PARK - SR 89 MT CARMEL	1,660	1,585
A00010	**0.00**	**7.57**	**7.57**	*	**JUNCTION FAI 70**	**415**	**395**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00010	7.57	12.01	4.44		SEVIER EMERY COUNTY LINE	415	395
	12.01	13.05	1.04		WEST INCORPORATED LIMITS EMERY	690	680
	13.05	25.00	11.95		EAST INCORPORATED LIMITS EMERY	1,640	1,355
	25.00	28.30	3.30		SOUTH INCORPORATED LIMITS FERRON	3,855	3,855
	28.30	29.80	1.50		NORTH INCORPORATED LIMITS FERRON	3,310	3,835
	29.80	30.77	0.97		SOUTH INCORPORATED LIMITS CLAWSON	3,310	3,835
	30.77	34.77	4.00		NORTH INCORPORATED LIMITS CLAWSON	3,310	3,835
	34.77	37.76	2.99		JUNCTION SR 57	4,050	4,000
	37.76	38.79	1.03		SOUTH INCORPORATED LIMITS CASTLEDALE	6,350	6,275
	38.79	41.33	2.54		NORTH INCORPORATED LIMITS CASTLEDALE	3,235	3,250
	41.33	46.65	5.32		JUNCTION SR 29	5,835	5,765
	46.65	47.68	1.03		SOUTH INCORPORATED LIMITS HUNTINGTON	9,250	9,145
	47.68	48.85	1.17		JUNCTION SR 31	6,810	6,730
	48.85	49.51	0.66		NORTH INCORPORATED LIMITS HUNTINGTON	5,150	5,080
	49.51	56.73	7.22		JUNCTION SR 155 ROAD TO CLEVELAND	3,530	3,465
	56.73	59.34	2.61		JUNCTION SR 155 ROAD TO ELMO	5,130	5,055
	59.34	61.09	1.75		EMERY CARBON COUNTY LINE	5,130	5,055
	61.09	67.31	6.22		JUNCTION SR 122	6,170	6,100
	67.31	67.54	0.23		PRICE SOUTH URBANIZED BOUNDARY	7,035	6,780
	67.54	68.06	0.52		PRICE SOUTH INCORPORATED LIMITS	8,260	7,960
	68.06	68.87	0.81		JUNCTION SR 6 PRICE BYPASS	8,895	8,730
	68.87	68.96	0.09		MAIN STREET - JUNCTION SR 55 100 NORTH STREET	8,275	8,130
A00011	**0.00**	**2.00**	**2.00**	*	**ARIZONA - UTAH STATE LINE**	**3,745**	**3,665**
	2.00	2.96	0.96		SOUTH INCORPORATED LIMITS KANAB - JUNCTION SR 89 KANAB	4,945	4,885
A00012	**0.00**	**13.68**	**13.68**	*	**JUNCTION SR 89**	**1,975**	**1,885**
	13.68	20.95	7.27		TROPIC JUNCTION SR 63	1,950	1,925

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00012	20.95	21.48	0.53		NORTH INCORPORATED LIMITS TROPIC	1,545	1,525
	21.48	25.64	4.16		SOUTH INCORPORATED LIMITS TROPIC	1,095	1,080
	25.64	25.95	0.31		WEST INCORPORATED LIMITS CANNONVILLE	1,125	1,110
	25.95	29.25	3.30		EAST INCORPORATED LIMITS CANNONVILLE	1,165	1,150
	29.25	29.48	0.23		WEST INCORPORATED LIMITS HENRIEVILLE	1,345	1,330
	29.48	59.16	29.68		EAST INCORPORATED LIMITS HENRIEVILLE	950	935
	59.16	60.49	1.33		WEST INCORPORATED LIMITS ESCALANTE	3,015	2,980
	60.49	64.82	4.33		SOUTHEAST INCORPORATED LIMITS ESCALANTE	1,020	1,005
	64.82	83.77	18.95		JUNCTION LOCAL ROAD (HOLE IN THE ROCK)	1,020	1,005
	83.77	87.92	4.15		WEST INCORPORATED LIMITS BOULDER	860	850
	87.92	92.96	5.04		FOREST BOUNDARY	535	525
	92.96	111.21	18.25		NORTH INCORPORATED LIMITS BOULDER	535	525
	111.21	115.74	4.53		GARFIELD - WAYNE COUNTY LINE	280	275
	115.74	117.00	1.26		DIXIE NATIONAL FOREST BOUNDARY	280	275
	117.00	118.95	1.95		GROVER	230	225
	118.95	123.67	4.72		TEASDALE ROAD - SR 24 WEST OF TORREY	190	185
A00013	**0.00**	**1.34**	**1.34**	*	**JUNCTION SR 91**	**17,735**	**18,085**
	1.34	1.64	0.30		JUNCTION SR 90 IN BRIGHAM CITY	16,730	17,080
	1.64	2.87	1.23		JUNCTION FOREST STREET	15,835	16,165
	2.87	3.63	0.76		JUNCTION SR 38 VIA MAIN STREET BRIGHAM CITY	4,155	4,500
	3.63	5.58	1.95		NORTH INCORPORATED LIMITS BRIGHAM CITY	3,985	4,310
	5.58	7.26	1.68		JUNCTION FAI 15 NORTH BRIGHAM CITY INTERCHANGE	7,200	7,520
	7.26	8.21	0.95		EAST INCORPORATED LIMITS CORRINNE	6,825	7,130
	8.21	9.48	1.27		JUNCTION SR 83 IN CORRINNE	2,250	2,315
	9.48	12.16	2.68		NORTH INCORPORATED LIMITS CORRINNE	1,880	1,940
	12.16	13.72	1.56		SOUTH INCORPORATED LIMITS BEAR RIVER CITY	2,075	2,140

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00013	13.72	15.97	2.25		NORTH INCORPORATED LIMITS BEAR RIVER CITY	1,425	1,470
	15.97	17.69	1.72		SOUTH INCORPORATED LIMITS ELWOOD	1,375	1,425
	17.69	18.93	1.24		JUNCTION FAI 15 IN ELWOOD	1,920	1,990
	18.93	19.61	0.68		NORTH INCORPORATED LIMITS ELWOOD	1,920	1,990
	19.61	19.93	0.32		SOUTHEAST INCORPORATED LIMITS TREMONTON	1,920	1,990
	19.93	20.70	0.77		JUNCTION SR 102 HAWS CORNER	1,815	1,880
	20.70	22.52	1.82		NORTHEAST INCORPORATED LIMITS TREMONTON	1,815	1,880
	22.52	25.02	2.50		JUNCTION SR 82	1,865	1,930
	25.02	30.97	5.95		JUNCTION SR 30 IN RIVERSIDE	1,750	1,710
	30.97	31.42	0.45		SOUTH INCORPORATED LIMITS PLYMOUTH	1,750	1,710
	31.42	32.30	0.88		WEST INCORPORATED LIMITS PLYMOUTH	1,750	1,710
	32.30	32.90	0.60		ROAD TO NUCOR STEEL PLANT - JUNCTION FAI 15	1,375	1,295
A00014	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 130 MAIN STREET IN CEDAR CITY**	**3,730**	**3,625**
	1.60	2.86	1.26		EAST INCORPORATED LIMITS CEDAR CITY	1,920	1,860
	2.86	10.92	8.06		EAST URBAN BOUNDARY CEDAR CITY	1,380	1,360
	10.92	17.93	7.01		DIXIE NATIONAL FOREST BOUNDARY	1,380	1,360
	17.93	22.50	4.57		JCT. SR 148 ROAD TO CEDAR BREAKS NATIONAL MONUMENT	475	470
	22.50	40.48	17.98		IRON - KANE COUNTY LINE - LONG VALLEY JUNCTION	475	470
A00015	**0.00**	**1.80**	**1.80**	*	**UTAH - ARIZONA STATE LINE**	**14,000**	**13,425**
	1.80	4.69	2.89		SOUTH INCORPORATED LIMITS ST GEORGE	14,000	13,425
	4.69	6.32	1.63		BLOOMINGTON INTERCHANGE	28,590	27,405
	6.32	8.67	2.35		SOUTH ST. GEORGE INTERCHANGE	24,860	22,395
	8.67	10.66	1.99		EAST ST. GEORGE INTERCHANGE	32,760	31,405
	10.66	10.74	0.08		NORTHEAST URBAN BOUNDARY ST. GEORGE	32,760	31,405
	10.74	10.95	0.21		N.E. INC. LIMITS ST. GEORGE & WEST INC. LIMITS WASHINGTON	32,760	31,405
	10.95	13.08	2.13		WASHINGTON INTERCHANGE	21,375	20,490

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	13.08	15.95	2.87	EAST INCORPORATED LIMITS WASHINGTON	21,375	20,490
	15.95	22.39	6.44	ZION PARK INTERCHANGE	11,930	11,480
	22.39	22.61	0.22	WEST INCORPORATED LIMITS LEEDS	11,930	11,480
	22.61	22.76	0.15	SOUTH LEEDS INTERCHANGE	10,830	10,725
	22.76	23.75	0.99	CENTER OF LEEDS	10,830	10,725
	23.75	24.39	0.64	NORTH LEEDS INTERCHANGE	11,240	11,120
	24.39	27.51	3.12	NORTH INCORPORATED LIMITS LEEDS	11,240	11,120
	27.51	30.72	3.21	ANDERSON INTERCHANGE	11,935	11,480
	30.72	31.90	1.18	BROWSE AREA INTERCHANGE	11,890	11,435
	31.90	33.48	1.58	PINTURA INTERCHANGE	11,870	11,415
	33.48	36.81	3.33	SNOWFIELD INTERCHANGE	11,870	11,415
	36.81	40.29	3.48	BLACK RIDGE INTERCHANGE	11,870	11,415
	40.29	42.21	1.92	KOLOB CANYON INTERCHANGE	11,870	11,415
	42.21	42.24	0.03	NEW HARMONY INTERCHANGE	11,800	11,350
	42.24	51.22	8.98	WASHINGTON - IRON COUNTY LINE	11,800	11,350
	51.22	56.88	5.66	NORTH KANARRAVILLE EXIT	12,265	11,795
	56.88	57.00	0.12	SOUTH URBAN BOUNDARY SOUTH CEDAR CITY INTERCHANGE	9,895	9,515
	57.00	58.93	1.93	SOUTH INCORPORATED LIMITS CEDAR CITY	9,895	9,515
	58.93	60.07	1.14	CENTER CEDAR INTERCHANGE SR 56	11,450	11,015
	60.07	62.01	1.94	NORTH INCORPORATED LIMITS CEDAR CITY	11,450	11,015
	62.01	62.23	0.22	NORTH CEDAR INTERCHANGE	11,880	11,425
	62.23	63.16	0.93	NORTHWEST INCORPORATED LIMITS CEDAR CITY	11,880	11,425
	63.16	70.37	7.21	NORTH URBAN BOUNDARY CEDAR CITY	11,880	11,425
	70.37	75.32	4.95	SUMMIT INTERCHANGE	11,265	10,835
	75.32	77.93	2.61	SOUTH PAROWAN INTERCHANGE	9,990	9,610
	77.93	82.39	4.46	NORTH PAROWAN INTERCHANGE	10,970	10,560

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	82.39	94.61	12.22	PARAGONAH INTERCHANGE	10,775	10,360
	94.61	99.85	5.24	JUNCTION SR 20 BEAR VALLEY JUNCTION	11,500	11,210
	99.85	101.35	1.50	RANCH EXIT	11,500	11,210
	101.35	108.93	7.58	IRON - BEAVER COUNTY LINE	11,500	11,210
	108.93	111.90	2.97	SOUTH BEAVER INTERCHANGE	9,420	9,060
	111.90	111.98	0.08	SOUTH INCORPORATED LIMITS BEAVER	9,420	9,060
	111.98	120.28	8.30	NORTH BEAVER INTERCHANGE	10,565	10,070
	120.28	125.13	4.85	MANDERFIELD INTERCHANGE	10,725	10,220
	125.13	129.59	4.46	PINECREEK INTERCHANGE	10,670	10,220
	129.59	131.98	2.39	SULPHURDALE INTERCHANGE	10,720	10,220
	131.98	132.32	0.34	BEAVER - MILLARD COUNTY LINE	10,720	10,220
	132.32	135.01	2.69	JUNCTION FAI 70	8,060	7,680
	135.01	138.21	3.20	NORTH COVE FORT INTERCHANGE	8,200	7,820
	138.21	146.64	8.43	DOG VALLEY INTERCHANGE	8,060	7,680
	146.64	158.41	11.77	SOUTH KANOSH INTERCHANGE	8,040	7,660
	158.41	163.49	5.08	MEADOW INTERCHANGE	9,745	9,285
	163.49	163.66	0.17	SOUTH FILLMORE INTERCHANGE	8,200	7,815
	163.66	165.73	2.07	SOUTH INCORPORATED LIMITS FILLMORE	8,200	7,815
	165.73	166.86	1.13	NORTH INCORPORATED LIMITS FILLMORE	8,200	7,815
	166.86	173.63	6.77	NORTH FILLMORE INTERCHANGE	8,855	8,440
	173.63	178.45	4.82	SOUTH HOLDEN INTERCHANGE	7,500	7,150
	178.45	183.75	5.30	NORTH HOLDEN INTERCHANGE	8,435	8,020
	183.75	188.54	4.79	RANCH EXIT	8,435	8,020
	188.54	194.23	5.69	SCIPIO INTERCHANGE	9,275	8,815
	194.23	202.27	8.04	MILLARD - JUAB COUNTY LINE	9,275	8,815
	202.27	206.63	4.36	YUBA STATE PARK INTERCHANGE	9,350	8,890

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	206.63	222.90	16.27	MILLS INTERCHANGE SR 78	8,970	8,470
	222.90	225.34	2.44	SOUTH NEPHI INTERCHANGE	9,870	9,320
	225.34	228.16	2.82	SALT CREEK INTERCHANGE	11,375	10,740
	228.16	233.24	5.08	NORTH NEPHI INTERCHANGE	14,510	13,830
	233.24	241.61	8.37	MONA INTERCHANGE	14,645	13,830
	241.61	242.55	0.94	JUAB - UTAH COUNTY LINE	14,645	13,830
	242.55	244.17	1.62	SOUTH SANTAQUIN INTERCHANGE	14,765	13,940
	244.17	244.76	0.59	SOUTH INCORPORATED LIMITS SANTAQUIN	14,765	13,940
	244.76	244.92	0.16	NORTH INCORPORATED LIMITS SANTAQUIN	14,765	13,940
	244.92	248.27	3.35	NORTH SANTAQUIN INTERCHANGE	18,175	16,635
	248.27	248.95	0.68	SOUTH WEST URBAN BOUNDARY PAYSON	18,175	16,635
	248.95	249.73	0.78	SOUTH PAYSON INTERCHANGE	19,205	17,575
	249.73	250.70	0.97	WEST INCORPORATED LIMITS PAYSON	19,205	17,575
	250.70	251.05	0.35	NORTH INC. LIMITS PAYSON NORTH URBAN BOUNDARY	19,205	17,575
	251.05	253.68	2.63	PAYSON INTERCHANGE SR 115	28,130	25,745
	253.68	254.35	0.67	SALEM INTERCHANGE SR 164	27,725	25,390
	254.35	256.99	2.64	SOUTHWEST URBANIZED BOUNDARY	27,725	25,390
	256.99	257.38	0.39	SOUTH INCORPORATED LIMITS SPANISH FORK	27,725	25,390
	257.38	257.90	0.52	SPANISH FORK INTERCHANGE	40,665	37,215
	257.90	258.82	0.92	MOARK INTERCHANGE	49,300	45,205
	258.82	259.92	1.10	NORTH INCORPORATED LIMITS SPANISH FORK	49,300	45,205
	259.92	260.08	0.16	SOUTH INCORPORATED LIMITS SPRINGVILLE	49,300	45,205
	260.08	261.93	1.85	SPRINGVILLE INTERCHANGE	56,665	51,940
	261.93	261.96	0.03	IRONTON INTERCHANGE SR 75	63,900	58,485
	261.96	263.15	1.19	NORTH INCORPORATED LIMITS SPRINGVILLE	63,900	58,485
	263.15	263.59	0.44	SOUTH INCORPORATED LIMITS PROVO	63,900	58,485

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	263.59	265.72	2.13	UNIVERSITY AVENUE INTERCHANGE	52,860	48,405
	265.72	267.58	1.86	CENTER STREET INTERCHANGE	71,005	64,745
	267.58	268.61	1.03	NORTH INCORPORATED LIMITS PROVO	71,005	64,745
	268.61	269.19	0.58	SOUTH INCORPORATED LIMITS OREM	71,005	64,745
	269.19	270.79	1.60	1200 SOUTH INTERCHANGE OREM	80,380	73,290
	270.79	271.81	1.02	CENTER STREET INTERCHANGE OREM	81,140	73,985
	271.81	272.91	1.10	800 NORTH INTERCHANGE OREM	82,150	74,905
	272.91	275.82	2.91	N. INC. LIMITS OREM & S. INC. LIMITS LINDON 1600 NORTH INT.	78,125	71,235
	275.82	276.26	0.44	WEST INCORPORATED LIMITS LINDON	78,125	71,235
	276.26	276.62	0.36	EAST INCORPORATED LIMITS AMERICAN FORK	78,125	71,235
	276.62	278.72	2.10	500 EAST INTERCHANGE AMERICAN FORK	65,160	58,320
	278.72	279.09	0.37	N.W. INC. LIMITS AMERICAN FORK & W. AMERICAN FORK INT.	75,050	68,430
	279.09	282.46	3.37	SOUTHEAST INC. LIMITS LEHI & SOUTH LEHI INTERCHANGE	68,775	62,710
	282.46	284.14	1.68	NORTHWEST INC. LIMITS LEHI & NORTH LEHI INTERCHANGE	74,225	67,680
	284.14	284.62	0.48	ALPINE INTERCHANGE SR 92	75,580	69,700
	284.62	286.06	1.44	NORTH URBAN BOUNDARY	75,580	69,700
	286.06	288.43	2.37	SALT LAKE URBAN BOUNDARY LINE	75,580	69,700
	288.43	291.53	3.10	BLUFFDALE INTERCHANGE	75,855	69,975
	291.53	292.76	1.23	DRAPER INTERCHANGE	88,335	81,485
	292.76	293.78	1.02	NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	88,335	81,485
	293.78	295.80	2.02	10600 SOUTH INTERCHANGE	116,400	107,375
	295.80	296.57	0.77	9000 SOUTH INTERCHANGE	149,945	138,320
	296.57	298.11	1.54	NORTH INC. LIMITS SANDY & SOUTH INC. LIMITS MIDVALE	149,945	138,320
	298.11	298.63	0.52	7200 SOUTH INTERCHANGE	177,720	163,950
	298.63	299.19	0.56	NORTH INC. LIMITS MIDVALE & SOUTH INC. LIMITS MURRAY	177,720	163,950
	299.19	300.51	1.32	FAI 215 JUNCTION	129,985	126,865

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	300.51	301.88	1.37	5300 SOUTH INTERCHANGE IN MURRAY	142,215	138,800
	301.88	302.51	0.63	4500 SOUTH INTERCHANGE	152,020	148,370
	302.51	303.65	1.14	NORTH INCORPORATED LIMITS MURRAY	152,020	148,370
	303.65	304.85	1.20	SOUTH INC. LIMITS SOUTH SALT LAKE & 33RD SOUTH INT.	165,615	161,640
	304.85	305.42	0.57	JUNCTION FAI 80 EAST	195,395	190,815
	305.42	306.55	1.13	2100 S. INT. (N. INC. LIMITS S. SALT LAKE & S. INC. LIMITS S.L.C.)	179,050	176,315
	306.55	307.70	1.15	1300 SOUTH INTERCHANGE	155,595	153,215
	307.70	308.17	0.47	500 AND 600 SOUTH CONNECTION	118,255	115,615
	308.17	309.58	1.41	JUNCTION FAI 80 WEST	96,070	92,852
	309.58	310.49	0.91	600 NORTH INTERCHANGE	75,785	74,625
	310.49	312.12	1.63	1100 NORTH INTERCHANGE	79,360	78,145
	312.12	312.58	0.46	BECK STREET INTERCHANGE	110,930	109,235
	312.58	313.38	0.80	SALT LAKE - DAVIS COUNTY LINE (S. INC. LIMITS N. SALT LAKE)	110,930	109,235
	313.38	315.52	2.14	JUNCTION FAI 215	119,685	117,855
	315.52	317.15	1.63	WOODS CROSS INTERCHANGE	104,890	103,285
	317.15	317.82	0.67	500 SOUTH INTERCHANGE	96,475	95,000
	317.82	318.30	0.48	400 NORTH INTERCHANGE IN WEST BOUNTIFUL	83,275	82,000
	318.30	318.75	0.45	1000 NORTH INTERCHANGE & NORTH INC. LIMITS BOUNTIFUL	98,655	97,150
	318.75	319.77	1.02	NORTH INC. LIMITS BOUNTIFUL & S. INC. LIMITS CENTERVILLE	98,655	97,150
	319.77	321.88	2.11	CENTERVILLE INTERCHANGE	101,835	96,290
	321.88	323.18	1.30	NORTH INCORPORATED LIMITS CENTERVILLE	101,835	96,290
	323.18	323.61	0.43	FARMINGTON EXIT	92,610	87,565
	323.61	324.46	0.85	SOUTH INCORPORATED LIMITS FARMINGTON	92,610	87,565
	324.46	324.69	0.23	LAGOON JUNCTION	59,800	56,540
	324.69	326.03	1.34	BURKE LANE EXIT	67,095	63,440
	326.03	326.88	0.85	NORTH INC. LIMITS FARMINGTON & SOUTH URBAN BOUNDARY	67,095	63,440

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00015	326.88	328.93	2.05	SOUTH INCORPORATED LIMITS KAYSVILLE	67,095	63,440
	328.93	329.54	0.61	JUNCTION SR 273 IN KAYSVILLE	73,755	69,735
	329.54	330.30	0.76	NORTH INC. LIMITS KAYSVILLE & SOUTH INC. LIMITS LAYTON	73,755	69,735
	330.30	331.88	1.58	SOUTH LAYTON INTERCHANGE	64,385	60,875
	331.88	333.17	1.29	NORTH LAYTON INTERCHANGE SR 232	65,485	61,915
	333.17	333.48	0.31	SYRACUSE INTERCHANGE SR 108	70,995	67,125
	333.48	334.38	0.90	NORTH INC. LIMITS LAYTON& SOUTH INC. LIMITS CLEARFIELD	70,995	67,125
	334.38	336.12	1.74	CLEARFIELD INTERCHANGE SR 193	78,195	73,935
	336.12	336.22	0.10	SUNSET INTERCHANGE SR 103	88,230	83,420
	336.22	338.02	1.80	NORTH INC. LIMITS CLEARFIELD & SOUTH INC. LIMITS SUNSET	88,230	83,420
	338.02	338.78	0.76	DAVIS - WEBER COUNTY LINE & NORTH INC. LIMITS SUNSET	88,230	83,420
	338.78	339.15	0.37	ROY INTERCHANGE SR 97	81,370	75,120
	339.15	339.45	0.30	NORTHEAST INC. LIMITS ROY & S.W. INC. LIMITS RIVERDALE	81,370	75,120
	339.45	340.54	1.09	RIVERDALE ROAD INTERCHANGE	63,385	57,150
	340.54	341.69	1.15	JUNCTION FAI 84	70,575	63,635
	341.69	342.27	0.58	NORTHEAST INC. LIMITS RIVERDALE & S.W. INC. LIMITS OGDEN	70,575	63,635
	342.27	343.41	1.14	31ST STREET INTERCHANGE IN OGDEN	71,725	64,675
	343.41	344.19	0.78	24TH STREET INTERCHANGE IN OGDEN	59,070	53,260
	344.19	345.31	1.12	WILSON LANE INTERCHANGE	55,235	49,805
	345.31	347.07	1.76	12TH STREET INTERCHANGE SR 39	48,190	43,450
	347.07	349.19	2.12	NORTH OGDEN INTERCHANGE 450 NORTH	43,370	39,105
	349.19	349.71	0.52	SOUTH INCORPORATED LIMITS PLEASANT VIEW	43,370	39,105
	349.71	350.24	0.53	PLAIN CITY INTERCHANGE 27TH NORTH	37,420	33,740
	350.24	351.75	1.51	SOUTH INCORPORATED LIMITS PLEASANT VIEW	37,420	33,740
	351.75	352.18	0.43	WEBER-BOX ELDER COUNTY LINE&N.INC. LIMITS PLEASANTVIEW	37,420	33,740
	352.18	355.47	3.29	HOT SPRINGS INTERCHANGE	35,500	32,010

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00015	355.47	357.93	2.46		SOUTH INCORPORATED LIMITS WILLARD	35,500	32,010
	357.93	359.18	1.25		NORTH WILLARD INTERCHANGE	33,560	30,260
	359.18	360.05	0.87		NORTH INCORPORATED LIMITS WILLARD	33,560	30,260
	360.05	362.26	2.21		SOUTH INCORPORATED LIMITS PERRY	33,560	30,260
	362.26	362.39	0.13		NORTH INCORPORATED LIMITS PERRY	33,560	30,260
	362.39	365.91	3.52		SOUTH BRIGHAM INTERCHANGE	20,880	18,830
	365.91	371.79	5.88		NORTH BRIGHAM INTERCHANGE	19,740	17,800
	371.79	373.13	1.34		SOUTHEAST INCORPORATED LIMITS HONEYVILLE	19,740	17,800
	373.13	374.25	1.12		HONEYVILLE INTERCHANGE	17,420	15,705
	374.25	375.32	1.07		NORTHWEST INCORPORATED LIMITS HONEYVILLE	17,420	15,705
	375.32	376.94	1.62		SOUTHEAST INCORPORATED LIMITS ELWOOD	17,420	15,705
	376.94	378.16	1.22		ELWOOD INTERCHANGE	13,865	12,500
	378.16	378.76	0.60		MALAD RIVER NORTHWEST INCORPORATED LIMITS ELWOOD	13,865	12,500
	378.76	380.35	1.59		SOUTHEAST INCORPORATED LIMITS TREMONTON	13,865	12,500
	380.35	381.49	1.14		ON RAMP FROM FAI 84	12,068	10,884
	381.49	385.73	4.24		GARLAND INTERCHANGE & NORTH INC. LIMITS TREMONTON	10,070	9,080
	385.73	392.88	7.15		RIVERSIDE INTERCHANGE	7,405	7,020
	392.88	399.32	6.44		PLYMOUTH INTERCHANGE	7,150	7,005
	399.32	401.07	1.75		PORTAGE INTERCHANGE - UTAH - IDAHO STATE LINE	6,900	6,500
A00016	**0.00**	**9.74**	**9.74**	*	**UTAH - WYOMING STATE LINE**	**770**	**640**
	9.74	10.37	0.63		SOUTHEAST INCORPORATED LIMITS WOODRUFF	1,395	1,095
	10.37	10.64	0.27		JUNCTION SR 39 IN WOODRUFF	960	800
	10.64	19.84	9.20		NORTH INCORPORATED LIMITS WOODRUFF	1,400	1,200
	19.84	20.86	1.02		SOUTH INCORPORATED LIMITS RANDOLPH	1,240	1,090
	20.86	29.04	8.18		NORTH INCORPORATED LIMITS RANDOLPH - JUNCTION SR 30	1,575	1,425
A00017	**0.00**	**0.85**	**0.85**	*	**JUNCTION SR 9**	**3,035**	**2,865**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00017	0.85	4.57	3.72		NORTH INC. LIMITS LAVERKIN & S. INC. LIMITS TOQUERVILLE	2,385	2,140
	4.57	6.03	1.46		NORTH INC. LIMITS TOQUERVILLE - FAI 15 ANDERSON JUNCTION	2,140	1,825
A00018	**0.00**	**1.45**	**1.45**	*	**JUNCTION FAI 15**	**17,355**	**17,030**
	1.45	2.10	0.65		400 SOUTH IN ST. GEORGE	30,690	30,120
	2.10	3.18	1.08		100 NORTH STREET SR 34	36,420	35,730
	3.18	4.23	1.05		JUNCTION FAU 4002 SANTA CLARA ROAD	6,955	6,825
	4.23	6.66	2.43		NORTH INCORPORATED LIMITS ST. GEORGE	4,105	3,955
	6.66	11.17	4.51		NORTH URBAN BOUNDARY	4,105	3,955
	11.17	20.10	8.93		JUNCTION SR 300 DIXIE STATE PARK	3,145	3,030
	20.10	26.72	6.62		VEYO	2,105	2,080
	26.72	40.20	13.48		CENTRAL	1,700	1,680
	40.20	40.23	0.03		SOUTHEAST INCORPORATED LIMITS ENTERPRISE	1,700	1,680
	40.23	40.37	0.14		JUNCTION SR 219	1,185	1,170
	40.37	43.62	3.25		NORTHEAST INCORPORATED LIMITS ENTERPRISE	1,185	1,170
	43.62	50.86	7.24		WASHINGTON - IRON COUNTY LINE - SR 56 BERYL JUNCTION	1,125	1,110
A00019	**0.00**	**0.25**	**0.25**	*	**JUNCTION FAI 70**	**3,065**	**2,890**
	0.25	1.97	1.72		WEST INCORPORATED LIMITS GREEN RIVER	4,860	4,580
	1.97	3.21	1.24		EMERY - GRAND COUNTY LINE	3,105	3,035
	3.21	4.58	1.37		EAST INCORPORATED LIMITS GREEN RIVER - JUNCTION FAI 70	3,595	3,390
A00020	**0.00**	**17.51**	**17.51**	*	**JUNCTION FAI 15 NORTH OF PAROWAN**	**1,380**	**1,365**
	17.51	20.69	3.18		IRON - GARFIELD COUNTY LINE - JUNCTION SR 89 AT ORTON	1,380	1,365
A00021	**0.00**	**1.53**	**1.53**	*	**NEVADA - UTAH STATE LINE**	**200**	**185**
	1.53	29.90	28.37		GARRISON	195	180
	29.90	76.44	46.54		MILLARD - BEAVER COUNTY LINE	325	300
	76.44	76.89	0.45		WEST INCORPORATED LIMITS MILFORD	610	575
	76.89	77.72	0.83		JUNCTION SR 257 IN MILFORD	2,630	2,600

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00021	77.72	90.18	12.46		EAST INCORPORATED LIMITS MILFORD	1,425	1,405
	90.18	96.12	5.94		JUNCTION SR 130 NORTH OF MINERSVILLE	1,095	985
	96.12	106.79	10.67		JUNCTION SR 310 MINERSVILLE STATE PARK	1,095	985
	106.79	107.27	0.48		WEST INCORPORATED LIMITS BEAVER - JUNCTION SR 160	2,980	2,675
A00022	**0.00**	**4.49**	**4.49**	*	**ANTIMONY**	**510**	**480**
	4.49	6.87	2.38		GARFIELD - PIUTE COUNTY LINE - JUNCTION SR 62 OTTER CREEK	510	480
A00023	**0.00**	**1.55**	**1.55**	*	**JUNCTION SR 91**	**750**	**700**
	1.55	2.53	0.98		JUNCTION SR 101 IN WELLSVILLE	1,590	1,500
	2.53	6.23	3.70		NORTH INCORPORATED LIMITS WELLSVILLE	1,010	950
	6.23	8.58	2.35		SOUTH INCORPORATED LIMITS MENDON	1,490	1,405
	8.58	9.91	1.33		NORTH INCORPORATED LIMITS MENDON	1,460	1,375
	9.91	17.42	7.51		JUNCTION SR 30	1,615	1,495
	17.42	17.99	0.57		SOUTH INCORPORATED LIMITS NEWTON	1,055	955
	17.99	18.97	0.98		JUNCTION SR 142 IN NEWTON	1,415	1,230
	18.97	19.12	0.15		EAST INCORPORATED LIMITS NEWTON	1,415	1,230
	19.12	22.08	2.96		JUNCTION SR 218	1,075	860
	22.08	24.16	2.08		SOUTH INCORPORATED LIMITS TRENTON	1,075	860
	24.16	25.72	1.56		JUNCTION SR 142 IN TRENTON	1,555	1,120
	25.72	28.12	2.40		NORTH INC. LIMITS TRENTON & SOUTH INC. LIMITS CORNISH	1,465	1,115
	28.12	29.72	1.60		JUNCTION SR 61 IN CORNISH - UTAH - IDAHO STATE LINE	1,000	770
A00024	**0.00**	**1.59**	**1.59**	*	**JUNCTION SR 50 EAST OF SALINA**	**735**	**685**
	1.59	3.66	2.07		WEST INCORPORATED LIMITS SALINA	735	685
	3.66	4.31	0.65		WEST INCORPORATED LIMITS AURORA	735	685
	4.31	5.33	1.02		SOUTH INCORPORATED LIMITS AURORA	735	685
	5.33	7.75	2.42		JUNCTION SR 260 TO AURORA	840	780
	7.75	7.90	0.15		ROAD TO SIGURD INTERCHANGE	2,215	2,065

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00024	7.90	8.16	0.26		NORTH INCORPORATED LIMITS SIGURD	2,215	2,065
	8.16	10.61	2.45		JUNCTION SR 118 IN SIGURD	1,360	1,310
	10.61	16.06	5.45		SOUTH INCORPORATED LIMITS SIGURD	745	715
	16.06	32.43	16.37		JUNCTION SR 119 EAST OF GLENWOOD	1,130	1,035
	32.43	37.14	4.71		JUNCTION SR 62	715	605
	37.14	39.23	2.09		SEVIER - PIUTE COUNTY LINE	715	605
	39.23	40.96	1.73		JUNCTION SR 25	915	835
	40.96	51.80	10.84		PIUTE - WAYNE COUNTY LINE	915	835
	51.80	53.03	1.23		JUNCTION SR 72 (NORTH INCORPORATED LIMITS LOA AT 51.86)	1,450	1,330
	53.03	60.13	7.10		EAST INCORPORATED LIMITS LOA	1,045	970
	60.13	61.12	0.99		WEST INCORPORATED LIMITS BICKNELL	1,440	1,335
	61.12	68.38	7.26		EAST INCORPORATED LIMITS BICKNELL	1,260	1,165
	68.38	69.21	0.83		WEST INCORPORATED LIMITS TORREY	990	925
	69.21	69.89	0.68		EAST INCORPORATED LIMITS TORREY	540	515
	69.89	73.71	3.82		JUNCTION SR 12	540	515
	73.71	88.06	14.35		WEST BOUNDARY CAPITOL REEF NATIONAL PARK	350	345
	88.06	117.02	28.96		EAST BOUNDARY CAPITOL REEF NATIONAL PARK	245	240
	117.02	126.35	9.33		JUNCTION SR 95 IN HANKSVILLE	260	255
	126.35	136.64	10.29		WAYNE - EMERY COUNTY LINE	245	240
	136.64	161.03	24.39		ROAD TO GOBLIN VALLEY - FAI 70	345	340
A00025	**0.00**	**2.84**	**2.84**	*	**JUNCTION SR 24 WEST OF LOA**	**405**	**380**
	2.84	10.01	7.17		PIUTE - SEVIER COUNTY LINE - BOWERY CAMPGROUND	405	380
A00026	**0.00**	**0.41**	**0.41**	*	**JUNCTION SR 126**	**23,110**	**22,280**
	0.41	0.98	0.57		JUNCTION FAI 15 VIA RIVERDALE ROAD	25,995	25,515
	0.98	1.33	0.35		JUNCTION FAI 84 VIA RIVERDALE ROAD	35,930	35,265
	1.33	2.93	1.60		JUNCTION SR 60	39,690	38,955

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00026	2.93	3.03	0.10		NORTH INC. LIMITS RIVERDALE & S. INC. LIMITS SOUTH OGDEN	39,690	38,955
	3.03	3.54	0.51		JUNCTION SR 204 WALL AVENUE	16,090	15,790
	3.54	3.68	0.14		S. INC. LIMITS OGDEN - JUNCTION SR 89 WASHINGTON BLVD.	16,090	15,790
A00028	**0.00**	**1.14**	**1.14**	*	**JUNCTION SR 89**	**3,250**	**3,170**
	1.14	3.87	2.73		NORTH INCORPORATED LIMITS GUNNISON	3,250	3,170
	3.87	16.00	12.13		ROAD TO FAYETTE	2,265	2,215
	16.00	29.46	13.46		SANPETE - JUAB COUNTY LINE	2,265	2,215
	29.46	30.14	0.68		SOUTH INCORPORATED LIMITS LEVAN	3,140	2,995
	30.14	30.35	0.21		JUNCTION SR 78 IN LEVAN	3,195	3,050
	30.35	39.03	8.68		NORTH INCORPORATED LIMITS LEVAN - JUNCTION SR 41	3,225	3,080
A00029	**0.00**	**9.47**	**9.47**	*	**WEST CAMP MARINA**	**410**	**385**
	9.47	14.79	5.32		MANTI LA SAL NATIONAL FOREST BOUNDARY	995	885
	14.79	17.60	2.81		JUNCTION SR 57	2,380	2,245
	17.60	17.84	0.24		NORTH INCORPORATED LIMITS ORANGEVILLE	2,750	2,590
	17.84	18.12	0.28		JUNCTION OLD SR 57 IN ORANGEVILLE	6,140	5,790
	18.12	18.69	0.57		EAST INCORPORATED LIMITS ORANGEVILLE	3,940	3,720
	18.69	20.01	1.32		WEST INCORPORATED LIMITS CASTLEDALE	3,940	3,720
	20.01	21.75	1.74		EAST INCORPORATED LIMITS CASTLEDALE - JUNCTION SR 10	3,940	3,720
A00030	**0.00**	**50.24**	**50.24**	*	**NEVADA - UTAH STATE LINE**	**215**	**215**
	50.24	74.65	24.41		ROSETTE	230	230
	74.65	90.56	15.91		JUNCTION SR 42 CURLEW JUNCTION - FAI 84	405	410
	90.57	91.84	1.28	*	JUNCTION FAI 15	6,160	6,090
	91.84	93.10	1.26		JUNCTION SR 13 AT RIVERSIDE	5,880	5,820
	93.10	94.90	1.80		JUNCTION SR 81 SOUTH OF FIELDING	5,260	5,200
	94.90	99.47	4.57		JUNCTION SR 38 SOUTH OF FIELDING	5,260	5,200
	99.47	102.30	2.83		BOX ELDER - CACHE COUNTY LINE	5,260	5,200

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00030	102.30	106.41	4.11		JUNCTION SR 23	6,010	5,940
	106.41	108.68	2.27		LOGAN WEST URBANIZED BOUNDARY	8,600	8,290
	108.68	109.95	1.27		WEST INCORPORATED LIMITS LOGAN-SR 91	8,600	8,290
	109.96	113.12	3.17	*	JUNCTION SR 89 GARDEN CITY	1,875	1,850
	113.12	120.10	6.98		SOUTH INCORPORATED LIMITS GARDEN CITY	1,310	1,295
	120.10	131.95	11.85		JUNCTION LOCAL ROAD NORTH OF LAKETOWN	450	445
	131.95	135.73	3.78		JUNCTION SR 16 - UTAH - WYOMING STATE LINE	760	750
A00031	**0.00**	**0.78**	**0.78**	*	**JUNCTION SR 89**	**1,675**	**1,580**
	0.78	4.35	3.57		EAST INCORPORATED LIMITS FAIRVIEW	1,350	1,270
	4.35	8.54	4.19		NATIONAL FOREST BOUNDARY	1,350	1,270
	8.54	13.39	4.85		SR 264 ROAD TO SCOFIELD	560	525
	13.39	13.99	0.60		ROAD TO FAIRVIEW RESERVOIR	465	435
	13.99	18.61	4.62		ROAD TO BEAVER DAM RESERVOIR	465	435
	18.61	20.98	2.37		SANPETE EMERY COUNTY LINE	470	440
	20.98	33.06	12.08		ROAD TO ELECTRIC LAKE	715	675
	33.06	37.70	4.64		ROAD TO CRANDALL CANYON	1,255	1,180
	37.70	38.31	0.61		MANTI LA SAL NATIONAL FOREST BOUNDARY	1,400	1,320
	38.31	40.10	1.79		ROAD TO BEAR CREEK CANYON	1,825	1,720
	40.10	46.99	6.89		ROAD TO DEER CREEK CANYON POWER STATION	3,655	3,445
	46.99	47.71	0.72		NORTHWEST INC. LIMITS HUNTINGTON - JUNCTION SR 10	4,375	4,125
A00032	**0.00**	**9.02**	**9.02**	*	**JUNCTION SR 40**	**1,305**	**1,230**
	9.02	9.44	0.42		WASATCH - SUMMIT COUNTY LINE	1,305	1,230
	9.44	10.37	0.93		WEST INCORPORATED LIMITS FRANCIS	2,050	1,930
	10.37	12.00	1.63		JUNCTION SR 35 IN FRANCIS	2,545	2,400
	12.00	12.40	0.40		NORTH INC. LIMITS FRANCIS & SOUTH INC. LIMITS KAMAS	3,040	2,865
	12.40	12.62	0.22		JUNCTION SR 248	3,040	2,865

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00032	12.62	13.20	0.58		JUNCTION SR 150 IN KAMAS	4,050	4,000
	13.20	17.37	4.17		NORTH INCORPORATED LIMITS KAMAS	2,530	2,500
	17.37	18.77	1.40		EAST INCORPORATED LIMITS OAKLEY	2,630	2,600
	18.77	21.88	3.11		NORTH INCORPORATED LIMITS OAKLEY	2,300	2,270
	21.88	28.42	6.54		JUNCTION LOCAL ROAD NORTH OF PEOA	2,100	2,075
	28.42	28.82	0.40		JUNCTION FAI 80	2,445	2,305
	28.82	28.95	0.13		JUNCTION LOCAL ROAD - FAI 80	925	890
A00034	**0.00**	**0.57**	**0.57**	*	**JUNCTION SR 18**	**20,745**	**20,360**
	0.57	1.39	0.82		MAIN STREET IN ST. GEORGE	33,735	33,110
	1.39	1.74	0.35		700 EAST	35,530	34,870
	1.74	2.05	0.31		INDUSTRIAL ROAD	28,210	27,685
	2.05	2.16	0.11		FAI 15 - RIVER ROAD	20,970	20,215
A00035	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 32**	**1,245**	**1,170**
	1.10	9.52	8.42		EAST INCORPORATED LIMITS OF FRANCIS	1,115	1,050
	9.52	28.02	18.50		SUMMIT - WASATCH COUNTY LINE	280	260
	28.02	35.44	7.42		WASATCH - DUCHESNE COUNTY LINE	280	260
	35.44	42.76	7.32		HANNA	280	260
	42.76	45.46	2.70		TABIONA	430	405
	45.46	62.49	17.03		JUNCTION SR 208 - JUNCTION SR 87	280	270
A00036	**0.00**	**1.36**	**1.36**	*	**JUNCTION SR 6**	**155**	**150**
	1.36	6.40	5.04		JUNCTION SOUTH LEG OF SR 36	325	320
	6.40	21.46	15.06		JUAB - TOOELE COUNTY LINE	325	320
	21.46	22.80	1.34		SOUTHEAST INCORPORATED LIMITS VERNON	320	315
	22.80	38.90	16.10		NORTH INCORPORATED LIMITS VERNON	320	315
	38.90	42.62	3.72		JUNCTION SR 199	1,655	1,635
	42.62	47.47	4.85		JUNCTION SR 73	3,315	3,275

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00036	47.47	48.40	0.93		SOUTH INCORPORATED LIMITS STOCKTON	4,080	4,030
	48.40	51.49	3.09		NORTH INCORPORATED LIMITS STOCKTON	4,080	4,030
	51.49	52.60	1.11		JUNCTION LOCAL ROAD TO TOOELE ARMY DEPOT	9,160	8,745
	52.60	53.88	1.28		SOUTH INC. LIMITS & SOUTH URBAN BOUNDARY TOOELE	8,745	8,580
	53.88	54.40	0.52		300 SOUTH IN TOOELE	15,885	15,730
	54.40	54.65	0.25		VINE STREET IN TOOELE	23,335	22,900
	54.65	54.95	0.30		100 NORTH SR 112	21,725	21,320
	54.95	56.92	1.97		200 NORTH IN TOOELE	11,295	10,965
	56.92	57.24	0.32		NORTH INCORPORATED LIMITS TOOELE	11,295	10,965
	57.24	63.03	5.79		NORTH URBAN BOUNDARY OF TOOELE	10,155	9,460
	63.03	65.77	2.74		JUNCTION SR 138 MILLS JUNCTION	10,950	10,455
	65.77	66.39	0.62		TRUCK STOP SERVICE CENTER - FAI 80	12,300	11,745
	66.40	67.43	1.04	*	JUNCTION SR 6 - JUNCTION SR 36	350	345
A00037	**0.00**	**0.52**	**0.52**	*	**JUNCTION SR 126 IN SUNSET**	**9,015**	**8,785**
	0.52	1.99	1.47		WEST INC. LIMITS SUNSET & EAST INC. LIMITS CLINTON	7,110	6,925
	1.99	2.49	0.50		JUNCTION SR 108 2000 WEST VIA 1800 NORTH	7,110	6,925
	2.49	3.50	1.01		OLD WEST URBAN BOUNDARY	1,880	1,830
	3.50	5.88	2.38		WEST INCORPORATED LIMITS CLINTON	1,380	1,345
	5.88	6.65	0.77		DAVIS - WEBER COUNTY LINE	1,515	1,515
	6.65	9.45	2.80		JUNCTION SR 98 IN HOOPER	1,825	1,845
	9.45	9.97	0.52		WEST HAVEN WEST INCORPORATED LIMITS	1,825	1,845
	9.97	11.97	2.00		JUNCTION SR 134 KANESVILLE	3,370	3,370
	11.97	12.29	0.32		OGDEN URBAN BOUNADRY - SR 108	3,370	3,370
A00038	**0.00**	**0.28**	**0.28**	*	**JUNCTION SR 13**	**4,710**	**4,590**
	0.28	1.03	0.75		NORTH INCORPORATED LIMITS BRIGHAM CITY	3,820	3,720
	1.03	5.89	4.86		NORTH URBAN BOUNDARY	3,820	3,720

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00038	5.89	8.31	2.42		SOUTH INCORPORATED LIMITS HONEYVILLE	2,925	2,755
	8.31	10.85	2.54		JUNCTION SR 240	2,400	2,260
	10.85	14.03	3.18		NORTH INCORPORATED LIMITS HONEYVILLE	2,390	2,250
	14.03	14.16	0.13		JUNCTION SR 102	4,455	4,200
	14.16	19.09	4.93		NORTH INCORPORATED LIMITS DEWEYVILLE - JUNCTION SR 30	4,455	4,200
A00039	**0.00**	**2.54**	**2.54**	*	**JUNCTION SR 134**	**6,590**	**6,215**
	2.54	3.53	0.99		WEST URBANIZED BOUNDARY	6,590	6,215
	3.53	4.00	0.47		JUNCTION SR 126 VIA 12TH STREET	14,900	14,625
	4.00	4.44	0.44		JUNCTION FAI 15	25,380	25,380
	4.44	5.97	1.53		WEST INCORPORATED LIMITS OGDEN	23,235	25,120
	5.97	6.40	0.43		JUNCTION SR 204 WALL AVENUE OGDEN	25,125	25,125
	6.40	7.26	0.86		WASHINGTON BOULEVARD VIA 12TH STREET	16,800	16,505
	7.26	7.72	0.46		MONROE AVENUE OGDEN	13,270	13,025
	7.72	7.93	0.21		JUNCTION SR 203 HARRISON BOULEVARD VIA 12TH STREET	12,665	12,600
	7.93	8.73	0.80		MOUNTAIN ROAD IN OGDEN	8,020	7,980
	8.73	13.80	5.07		EAST INCORPORATED LIMITS OGDEN & VALLEY DRIVE	7,325	7,365
	13.80	16.58	2.78		JUNCTION SR 158 AT PINEVIEW	3,545	4,450
	16.58	19.35	2.77		JUNCTION SR 226	2,250	2,260
	19.35	21.45	2.10		JUNCTION LOCAL ROAD TO EDEN	2,040	1,920
	21.45	27.74	6.29		ROAD TO MONASTERY	1,255	1,180
	27.74	43.67	15.93		ROAD TO CAUSEY RESERVIOR	330	315
	43.67	52.35	8.68		WEBER - RICH COUNTY LINE	330	315
	52.35	67.35	15.00		WASATCH NATIONAL FOREST BOUNDARY	350	330
	67.35	67.64	0.29		WEST INCORPORATED LIMITS WOODRUFF - SR 16 IN WOODRUFF	405	380
A00040	**0.00**	**3.96**	**3.96**	*	**JUNCTION FAI 80 SILVER CREEK JUNCTION**	**16,225**	**15,490**
	3.96	6.04	2.08		JUNCTION SR 248	11,490	9,495

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00040	6.04	13.21	7.17	SUMMIT- WASATCH COUNTY LINE	11,490	9,495
	13.21	16.38	3.17	JUNCTION SR 32 TO FRANCIS	9,310	8,855
	16.38	17.01	0.63	NORTH INCORPORATED LIMITS HEBER	17,195	15,180
	17.01	17.94	0.93	JUNCTION SR 113 IN HEBER	17,195	15,180
	17.94	20.51	2.57	JUNCTION SR 189 AND SOUTH INCORPORATED LIMITS HEBER	6,870	6,190
	20.51	33.20	12.69	JUNCTION LOCAL ROAD	4,045	3,665
	33.20	40.28	7.08	DANIELS SUMMIT	4,045	3,665
	40.28	58.67	18.39	ROAD RIGHT TO CAMP STRAWBERRY	2,740	2,615
	58.67	68.25	9.58	WASATCH - DUCHESNE COUNTY LINE	3,040	2,900
	68.25	85.92	17.67	JUNCTION SR 208	3,155	3,010
	85.92	86.57	0.65	WEST INCORPORATED LIMITS DUCHESNE	2,735	2,610
	86.57	87.23	0.66	JUNCTION SR 87 IN DUCHESNE	3,330	3,180
	87.23	96.63	9.40	EAST INCORPORATED LIMITS DUCHESNE	2,800	2,670
	96.63	105.00	8.37	JUNCTION LOCAL ROAD TO BRIDGELAND	3,315	3,165
	105.00	105.46	0.46	SOUTHWEST INCORPORATED LIMITS MYTON	3,590	3,485
	105.46	109.59	4.13	NORTH INCORPORATED LIMITS MYTON	4,265	4,070
	109.59	111.39	1.80	JUNCTION SR 87 SOUTHWEST OF ROOSEVELT	6,850	6,115
	111.39	114.62	3.23	SOUTH INCORPORATED LIMITS ROOSEVELT	6,855	6,710
	114.62	115.24	0.62	JUNCTION SR 121 IN ROOSEVELT	8,165	7,990
	115.24	118.43	3.19	DUCHESNE - UINTAH COUNTY LINE & W. INC. LIMITS BALLARD	5,460	5,340
	118.43	121.44	3.01	EAST INCORPORATED LIMITS BALLARD	5,460	5,340
	121.44	130.48	9.04	JUNCTION LOCAL ROAD TO FORT DUCHESNE	2,875	2,810
	130.48	141.39	10.91	JUNCTION SR 88 ROAD TO OURAY	3,960	3,875
	141.39	141.47	0.08	SOUTH URBAN BOUNDARY VERNAL	3,960	3,875
	141.47	144.31	2.84	SOUTHWEST INCORPORATED LIMITS VERNAL	23,180	22,750
	144.31	145.89	1.58	JUNCTION SR 191 IN VERNAL	23,875	23,430

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00040	145.89	145.98	0.09		SOUTHEAST URBAN BOUNDARY VERNAL	23,875	23,430
	145.98	148.28	2.30		EAST INC. LIMITS VERNAL & NORTH INC. LIMITS NAPLES	10,180	9,720
	148.28	148.52	0.24		JUNCTION SR 45	4,865	4,770
	148.52	157.18	8.66		SOUTH INCORPORATED LIMITS NAPLES	4,865	4,770
	157.18	168.79	11.61		JUNCTION SR 149 JENSEN	1,545	1,545
	168.79	174.78	5.99		JCT. CNTY RD. TO BONANZA JCT. - UTAH-COLORADO STATE LINE	1,460	1,460
A00041	**0.00**	**1.03**	**1.03**	*	**JUNCTION SR 28**	**3,405**	**3,210**
	1.03	1.90	0.87		SOUTH INCORPORATED LIMITS NEPHI	3,570	3,365
	1.90	3.22	1.32		JUNCTION SR 132 IN NEPHI	4,560	4,300
	3.22	4.79	1.57		NORTH INCORPORATED LIMITS NEPHI - FAI 15	3,490	3,290
A00042	**0.00**	**7.37**	**7.37**	*	**UTAH - IDAHO STATE LINE - JUNCTION SR 30 CURLEW JCT.**	**190**	**200**
A00043	**0.00**	**7.41**	**7.41**	*	**UTAH - WYOMING STATE LINE**	**710**	**700**
	7.41	7.92	0.51		WEST INCORPORATED LIMITS MANILA	1,130	1,115
	7.92	8.68	0.76		JUNCTION SR 44 IN MANILA	1,010	950
	8.68	10.54	1.86		EAST INCORPORATED LIMITS MANILA - WYOMING STATE LINE	930	875
A00044	**0.00**	**27.74**	**27.74**	*	**JUNCTION SR 191 GREENDALE JUNCTION**	**620**	**610**
	27.74	27.90	0.16		SOUTH INCORPORATED LIMITS MANILA - JUNCTION SR 43	740	730
A00045	**0.00**	**4.61**	**4.61**	*	**BEGINNING OF ROUTE**	**195**	**180**
	4.61	9.33	4.72		BONANZA	195	180
	9.33	14.80	5.47		JUNCTION (OLD SR45) COUNTY ROAD	195	180
	14.80	21.75	6.95		ROAD TO POWER PLANT	845	795
	21.75	24.06	2.31		ROAD TO RED WASH OIL FIELD	930	875
	24.06	38.45	14.39		JUNCTION LOCAL ROAD	1,170	1,100
	38.45	39.93	1.48		JUNCTION 4500 SOUTH	1,365	1,285
	39.93	40.15	0.22		SOUTH INCORPORATED LIMITS NAPLES - SR 40	1,365	1,285
A00046	**0.00**	**9.03**	**9.03**	*	**JUNCTION SR 191**	**1,060**	**1,000**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00046	9.03	21.77	12.74		LA SAL - UTAH - COLORADO STATE LINE	355	335
A00048	**0.00**	**1.77**	**1.77**	*	**NEAR COPPERTON**	**3,180**	**3,490**
	1.77	2.51	0.74		COPPERTON	3,180	3,490
	2.51	3.71	1.20		WEST INCORPORATED LIMITS WEST JORDAN	3,180	3,490
	3.71	6.60	2.89		JUNCTION SR 111	3,180	3,490
	6.60	7.18	0.58		WEST URBAN BOUNDARY	3,180	3,490
	7.18	8.21	1.03		JUNCTION 4800 WEST STREET	4,425	4,425
	8.21	8.50	0.29		JUNCTION 7800 SOUTH STREET	13,065	13,065
	8.50	8.80	0.30		WEST INCORPORATED LIMITS WEST JORDAN VIA 7800 SOUTH	13,065	13,065
	8.80	9.30	0.50		JUNCTION BANGERTER HIGHWAY VIA 7800 SOUTH	16,910	16,500
	9.30	9.80	0.50		JUNCTION 3200 WEST STREET	20,690	19,945
	9.80	10.80	1.00		2700 WEST STREET	31,955	30,805
	10.80	11.73	0.93		REDWOOD ROAD SR 68 VIA 7800 SOUTH STREET	31,815	30,670
	11.73	12.17	0.44		EAST INC. LIMITS WEST JORDAN & WEST INC. LIMITS MIDVALE	31,380	30,250
	12.17	12.91	0.74		JUNCTION HOLDEN STREET IN MIDVALE	27,515	26,525
	12.91	13.24	0.33		7200 SOUTH VIA HOLDEN AND 700 WEST STREET	27,490	26,500
	13.24	13.93	0.69		JUNCTION FAI 15 VIA 7200 SOUTH STREET - STATE STREET	31,125	30,005
A00050	**0.00**	**0.84**	**0.84**	*	**JUNCTION SR 6**	**1,820**	**1,735**
	0.84	3.40	2.56		EAST INCORPORATED LIMITS DELTA	1,820	1,735
	3.40	8.24	4.84		JUNCTION SR 125 EAST OF DELTA	1,465	1,465
	8.24	18.12	9.88		JUNCTION LOCAL ROAD SOUTHEAST OF DELTA	815	1,010
	18.12	27.05	8.93		JUNCTION SR 100	650	710
	27.05	30.31	3.26		JUNCTION SR 64 NORTH OF HOLDEN - JUNCTION FAI 15	1,395	1,395
	30.32	30.58	0.26	*	JUNCTION FAI 15 WEST OF SCIPIO	1,485	1,400
	30.58	31.63	1.05		WEST INCORPORATED LIMITS SCIPIO	1,550	1,460
	31.63	31.78	0.15		CENTER OF SCIPIO	1,475	1,390

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00050	31.78	49.68	17.91		SOUTHEAST INCORPORATED LIMITS SCIPIO	1,045	985
	49.68	55.38	5.70		MILLARD - SEVIER COUNTY LINE	1,045	985
	55.38	58.29	2.91		JUNCTION SR 260 TO AURORA	1,220	1,150
	58.29	58.39	0.10		WEST INCORPORATED LIMITS SALINA	2,310	2,175
	58.39	59.12	0.73		JUNCTION SR 24 - JUNCTION SR 89	4,055	3,825
A00051	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 147**	**2,700**	**2,600**
	0.23	0.38	0.15		NORTH INCORPORATED LIMITS SPANISH FORK	2,700	2,600
	0.38	1.29	0.91		MAGGIE'S BEND	7,345	7,080
	1.29	3.40	2.11		SOUTH INCORPORATED LIMITS SPRINGVILLE-SR 89	7,060	6,805
A00052	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 114**	**8,410**	**8,105**
	0.47	1.55	1.08		JUNCTION FAI 15 VIA 800 NORTH OREM	21,745	21,745
	1.55	1.76	0.21		JUNCTION 400 WEST STREET FAU 3033 OREM	21,285	23,345
	1.76	2.57	0.81		JUNCTION SR 89 OREM	28,875	29,115
	2.57	3.07	0.50		400 EAST STREET VIA 800 NORTH	22,905	22,670
	3.07	4.54	1.47		800 EAST STREET OREM - OLMSTEAD JUNCTION	12,560	12,325
A00053	**0.00**	**0.34**	**0.34**	*	**JUNCTION FAI 15 24TH STREET INTERCHANGE**	**15,330**	**14,780**
	0.34	1.10	0.76		24TH STREET IN OGDEN	16,485	15,890
	1.10	1.49	0.39		EXCHANGE PLACE VIA 24TH STREET	17,630	14,020
	1.49	1.96	0.47		WALL AVENUE - WASHINGTON BOULEVARD	15,190	14,645
A00054	**0.00**	**0.41**	**0.41**	*	**MAIN STREET MONA**	**425**	**300**
	0.41	1.26	0.85		EAST INCORPORATED LIMITS MONA-JUNCTION FAI 15	475	375
A00055	**0.00**	**0.32**	**0.32**	*	**JUNCTION SR 6 PRICE BYPASS**	**11,425**	**11,260**
	0.32	0.95	0.63		600 WEST STREET IN PRICE	11,830	12,465
	0.95	1.26	0.31		JUNCTION SR 10 CARBON AVENUE VIA 100 NORTH	13,135	13,405
	1.26	1.35	0.09		JUNCTION SR 283 300 EAST STREET VIA 100 NORTH	13,185	12,940
	1.35	2.01	0.66		MAIN STREET VIA 300 EAST STREET	19,365	19,005

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00055	2.01	2.09	0.08		1000 EAST VIA MAIN STREET	16,930	16,600
	2.09	2.52	0.43		JUNCTION LOCAL ROAD TO AIRPORT	12,315	12,005
	2.52	3.12	0.60		500 SOUTH - PRICE BYPASS SOUTH OF PRICE	10,230	10,040
A00056	**0.00**	**9.79**	**9.79**	*	**NEVADA - UTAH STATE LINE**	**430**	**405**
	9.79	25.04	15.25		MODENA	630	555
	25.04	31.44	6.40		SR 18 BERYL JUNCTION	1,180	1,295
	31.44	41.75	10.31		NEWCASTLE	1,180	1,295
	41.75	55.83	14.08		IRON MOUNTAIN	1,825	1,800
	55.83	58.61	2.78		JUNCTION LOCAL ROAD TO IRON SPRINGS	2,785	2,750
	58.61	58.81	0.20		JUNCTION LOCAL ROAD TO LUND WEST URBAN BOUNDARY	3,335	3,235
	58.81	60.38	1.57		WEST INCORPORATED LIMITS CEDAR CITY	3,335	3,235
	60.38	61.35	0.97		JUNCTION FAI 15 - SR 130 MAIN STREET CEDAR CITY	13,245	13,000
A00057	**0.00**	**2.66**	**2.66**	*	**JUNCTION SR 10**	**985**	**950**
	2.66	6.66	4.00		LOCAL ROAD TO ORANGEVILLE	900	865
	6.66	10.66	4.00		SR 29 - WILBERG MINE	900	865
A00058	**0.00**	**0.86**	**0.86**	*	**NEVADA - UTAH STATE LINE**	**11,310**	**10,665**
	0.86	1.26	0.40		EAST INCORPORATED LIMITS WENDOVER	7,700	7,260
	1.26	1.54	0.28		JUNCTION COUNTY ROAD - WENDOVER INTERCHANGE	5,590	5,270
A00059	**0.00**	**8.07**	**8.07**	*	**ARIZONA - UTAH STATE LINE**	**2,880**	**3,055**
	8.07	20.52	12.45		BIG PLAIN JUNCTION	2,905	2,905
	20.52	22.12	1.60		EAST INCORPORATED LIMITS HURRICANE - JUNCTION SR 9	3,270	3,080
A00060	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 26 RIVERDALE ROAD**	**11,630**	**11,690**
	0.77	2.25	1.48		JUNCTION SR 168	2,325	2,265
	2.25	6.91	4.66		E. INC. LIMITS RIVERDALE & WEBER-DAVIS CNTY LINE - JCT. SR 89	2,310	2,250
A00061	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 23**	**1,355**	**1,275**
	0.73	0.98	0.25		EAST INCORPORATED LIMITS CORNISH	1,890	1,780

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00061	0.98	7.24	6.26		WEST INCORPORATED LIMITS LEWISTON - SR 91	1,890	1,780
A00062	**0.00**	**0.40**	**0.40**	*	**JUNCTION SR 89 IN JUNCTION**	**495**	**465**
	0.40	0.46	0.06		EAST INCORPORATED LIMITS JUNCTION	320	300
	0.46	4.49	4.03		WEST INCORPORATED LIMITS KINGSTON	320	300
	4.49	11.77	7.28		EAST INCORPORATED LIMITS KINGSTON	320	300
	11.77	18.05	6.28		JUNCTION SR 22 OTTER CREEK RESERVIOR	410	385
	18.05	31.47	13.42		ROAD TO ANGLE	410	385
	31.47	36.85	5.38		GREENWICH	410	385
	36.85	37.17	0.32		PIUTE - SEVIER COUNTY LINE	580	545
	37.17	37.93	0.76		SOUTH INCORPORATED LIMITS KOOSHAREM	695	655
	37.93	42.42	4.49		NORTH INC. LIMITS KOOSHAREM (AT MP 37.87) - JUNCTION SR 24	695	655
A00063	**0.00**	**2.65**	**2.65**	*	**NORTH BOUNDARY BRYCE CANYON - JUNCTION SR 12**	**2,465**	**2,325**
A00064	**0.00**	**0.96**	**0.96**	*	**JUNCTION FAI 15**	**740**	**625**
	0.96	1.91	0.95		SOUTH INCORPORATED LIMITS HOLDEN	690	575
	1.91	2.02	0.11		NORTH INCORPORATED LIMITS HOLDEN - JUNCTION SR 50	425	380
A00065	**0.00**	**2.38**	**2.38**	*	**JUNCTION FAI 80 MOUNTAIN DELL RESERVIOR**	**1,085**	**1,200**
	2.38	7.78	5.40		JUNCTION LOCAL ROAD TO EMIGRATION CANYON	625	655
	7.78	19.32	11.54		SALT LAKE - MORGAN COUNTY LINE	575	575
	19.32	21.68	2.36		JUNCTION SR 66 EAST CANYON RESEVOIR	280	260
	21.68	26.99	5.31		MORGAN - SUMMIT COUNTY LINE	270	255
	26.99	27.25	0.26		WEST INCORPORATED LIMITS OF HENEFER	705	665
	27.25	28.13	0.88		JUNCTION SR 86 IN HENEFER - FAI 84	1,240	1,190
A00066	**0.00**	**8.75**	**8.75**	*	**JUNCTION SR 65 AT EAST CANYON**	**475**	**445**
	8.75	12.11	3.36		PORTERSVILLE	1,110	1,045
	12.11	12.69	0.58		SOUTH INCORPORATED LIMITS MORGAN	2,010	1,895
	12.69	13.46	0.77		YOUNG STREET (CITY CENTER)	5,875	5,540

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
A00066	13.46	13.51	0.05	COMMERCIAL STREET	5,650	5,325
	13.51	13.66	0.15	SR 84 EASTBOUND OFF RAMP	880	830
	13.66	14.20	0.54	600 EAST SR 66 TURNS RIGHT	880	830
	14.20	14.28	0.08	SR 66 TURNS RIGHT AND FAI 84 WESTBOUND OFF RAMP	880	830
	14.28	14.84	0.56	SR 66 TURNS RIGHT FAI 84 EASTBOUND ON RAMP - SR 66	510	480
A00068	**0.00**	**23.73**	**23.73**	* **JUNCTION SR 6 ELBERTA**	**425**	**400**
	23.73	32.85	9.12	PELICAN POINT	920	865
	32.85	36.17	3.32	JUNCTION SR 73 WEST OF LEHI	2,610	2,370
	36.17	40.21	4.04	SALT LAKE COUNTY LINE & URBAN BOUNDARY	3,960	3,465
	40.21	40.97	0.76	JUNCTION SR 140 BLUFFDALE	5,970	4,640
	40.97	42.48	1.51	RIVERTON SOUTH INCORPORATED LIMITS VIA REDWOOD ROAD	11,525	9,100
	42.48	43.76	1.28	JUNCTION SR 71 12600 SOUTH IN RIVERTON	16,545	15,950
	43.76	46.50	2.74	NORTH INC. LIMITS RIVERTON & S. INC. LIMITS SOUTH JORDAN	17,610	16,975
	46.50	47.00	0.50	N. INC. LIMITS SOUTH JORDAN & S. INC. LIMITS WEST JORDAN	18,030	17,380
	47.00	48.52	1.52	JUNCTION SR 209 9000 SOUTH STREET	34,575	33,330
	48.52	50.29	1.77	JUNCTION SR 48 7800 SOUTH STREET	31,115	29,995
	50.29	50.96	0.67	NORTH INCORPORATED LIMITS WEST JORDAN	36,305	35,000
	50.96	51.53	0.57	JUNCTION FAI 215	55,695	53,695
	51.53	52.54	1.01	JUNCTION SR 173 5400 SOUTH STREET	55,240	53,255
	52.54	53.52	0.98	4700 SOUTH STREET SR 266	39,910	38,485
	53.52	53.53	0.01	SOUTH INCORPORATED LIMITS WEST VALLEY CITY	39,910	38,485
	53.53	54.53	1.00	4100 SOUTH VIA SR 68	36,540	35,650
	54.53	56.42	1.89	3500 SOUTH SR 171	37,890	37,890
	56.42	56.54	0.12	JCT. SR 201 (N. INC. LIMITS WEST VALLEY CITY S. INC. LIMITS S.L.C.)	37,890	37,890
	56.54	57.55	1.01	2100 SOUTH STREET VIA REDWOOD ROAD	22,400	22,590

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	57.55	59.30	1.75		CALIFORNIA AVENUE(1330 SOUTH)	22,155	22,155
A00068	59.30	59.67	0.37		FAI 80 INTERCHANGE	24,080	24,280
	59.67	60.45	0.78		NORTH TEMPLE STREET	16,775	16,170
	60.45	61.01	0.56		600 NORTH STREET	18,955	16,995
	61.01	62.78	1.77		1000 NORTH STREET	11,160	10,430
	62.78	63.08	0.30		2400 NORTH STREET	6,865	6,615
	63.08	63.85	0.77		SALT LAKE - DAVIS COUNTY LINE & N. INC. LIMITS S.L.C.	6,865	6,615
	63.85	63.98	0.13		SOUTH INCORPORATED LIMITS NORTH SALT LAKE	6,865	6,615
	63.98	64.57	0.59		JUNCTION FAI 215	5,950	5,735
	64.57	65.94	1.37		CENTER STREET	5,950	5,735
	65.94	67.51	1.57		N. INC. LIMITS NORTH SALT LAKE & S. INC. LIMITS WOODS CROSS	5,045	4,860
	67.51	68.30	0.79		NORTH INCORPORATED LIMITS WOODS CROSS	5,045	4,860
	68.30	68.89	0.59		WEST INCORPORATED LIMITS WEST BOUNTIFUL	8,175	7,880
	68.89	69.18	0.29		JUNCTION 800 WEST VIA 500 SOUTH	12,670	12,035
	69.18	69.40	0.22		JUNCTION FAI 15 VIA 500 SOUTH	14,840	14,305
	69.40	69.74	0.34		JUNCTION SR 89 & W. INC. LIMITS BOUNTIFUL - JUNCTION SR 106	27,100	26,125
A00070	**0.00**	**1.37**	**1.37**	*	**JUNCTION FAI 15**	**3,132**	**2,980**
	1.37	6.90	5.53		COVE FORT INTERCHANGE	3,355	3,180
	6.90	7.88	0.98		MILLARD - SEVIER COUNTY LINE	3,355	3,180
	7.88	17.24	9.36		CLEAR CREEK INTERCHANGE	3,355	3,180
	17.24	23.31	6.07		BELKNAP INTERCHANGE	3,770	3,570
	23.31	25.88	2.57		SEVIER JUNCTION INTERCHANGE	5,040	4,775
	25.88	31.83	5.95		JOSEPH INTERCHANGE	5,305	5,025
	31.83	37.29	5.46		ELSINORE INTERCHANGE	5,630	5,365
	37.29	40.42	3.13		SOUTH RICHFIELD INTERCHANGE	3,610	3,495
	40.42	49.11	8.69		NORTH RICHFIELD INTERCHANGE	6,640	6,430

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	49.11	56.92	7.81	SIGURD INTERCHANGE	7,195	6,970
A00070	56.92	57.17	0.25	SALINA INTERCHANGE	6,520	6,245
	57.17	63.41	6.24	EAST INCORPORATED LIMITS SALINA	6,520	6,245
	63.41	74.16	10.75	GOOSEBERRY INTERCHANGE	6,380	6,045
	74.16	85.47	11.31	RANCH EXIT #72 TO CONVULSION MINE	4,300	4,075
	85.47	91.24	5.77	JUNCTION IVY CREEK INTERCHANGE #85	3,825	3,625
	91.24	94.43	3.19	JUNCTION SR 10 INTERCHANGE	3,170	3,170
	94.43	99.70	5.27	SEVIER - EMERY COUNTY LINE	3,170	3,170
	99.70	108.24	8.54	MUDDY CREEK INTERCHANGE	3,170	3,170
	108.24	116.75	8.51	SOUTH WASH INTERCHANGE	3,170	3,170
	116.75	131.79	15.04	MOORE INTERCHANGE	3,130	3,170
	131.79	149.52	17.73	SINBAD INTERCHANGE	3,130	3,170
	149.52	158.28	8.76	BUCKMASTER DRAW INTERCHANGE	3,470	3,545
	158.28	163.35	5.07	JUNCTION SR 6 WEST OF GREEN RIVER INTERCHANGE	5,590	5,700
	163.35	164.05	0.70	EMERY - GRAND COUNTY LINE	5,590	5,700
	164.05	164.91	0.86	WEST GREEN RIVER INTERCHANGE	3,495	3,565
	164.91	175.96	11.05	ELGIN EAST GREEN RIVER INTERCHANGE	5,370	5,480
	175.96	182.56	6.60	FLOY INTERCHANGE	5,370	5,480
	182.56	187.82	5.26	CRESCENT JUNCTION	5,575	5,285
	187.82	193.89	6.07	THOMPSON INTERCHANGE	5,375	5,095
	193.89	205.18	11.29	YELLOW CAT INTERCHANGE	5,445	5,160
	205.18	214.84	9.66	WHITEHOUSE INTERCHANGE	5,385	5,105
	214.84	222.35	7.51	NORTH CISCO INTERCHANGE	5,210	5,000
	222.35	227.56	5.21	WESTWATER INTERCHANGE	5,210	5,000
	227.56	232.15	4.59	HARLEY DOME INTERCHANGE - UTAH - COLORADO STATE LINE	5,230	5,070
A00071	**0.00**	**0.90**	**0.90**	* **JUNCTION SR 68**	**18,545**	**18,710**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	0.90	2.51	1.61	EAST INC. LIMITS RIVERTON & WEST INC. LIMITS DRAPER	18,545	18,710
A00071	2.51	2.59	0.08	FRONTAGE ROAD	21,550	20,700
	2.59	3.63	1.04	JUNCTION FAI 15 VIA 12300 SOUTH STREET	19,850	18,300
	3.63	4.82	1.19	700 EAST STREET IN DRAPER	10,310	9,500
	4.82	5.81	0.99	NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	13,960	12,540
	5.81	6.81	1.00	10600 SOUTH STREET	19,650	17,240
	6.81	7.32	0.51	9800 SOUTH STREET VIA 700 EAST	29,420	27,495
	7.32	7.83	0.51	9400 SOUTH STREET	30,225	30,105
	7.83	8.31	0.48	9000 SOUTH STREET SR 209 VIA 700 EAST	31,280	31,155
	8.31	9.31	1.00	8600 SOUTH STREET	38,055	37,905
	9.31	10.29	0.98	7800 SOUTH STREET NORTH INCORPORATED LIMITS SANDY	32,325	32,200
	10.29	10.93	0.64	FORT UNION BOULEVARD	28,565	28,455
	10.93	11.65	0.72	6600 SOUTH STREET VIA 900 EAST	28,565	28,455
	11.65	12.17	0.52	5900 SOUTH STREET	25,345	25,245
	12.17	13.29	1.12	5600 SOUTH STREET VIA 900 EAST	29,880	29,765
	13.29	14.09	0.80	4800 SOUTH STREET SR 152 VIA 900 EAST	32,150	32,025
	14.09	14.97	0.88	4500 SOUTH STREET SR 266 VIA 700 EAST	40,990	40,605
	14.97	15.85	0.88	3900 SOUTH STREET	47,030	46,245
	15.85	16.72	0.87	3300 SOUTH STREET SR 171 S. INC. LIMITS SOUTH SALT LAKE CITY	46,340	45,570
	16.72	17.15	0.43	2700 SOUTH STREET VIA 700 EAST STREET	40,805	40,125
	17.15	17.60	0.45	JUNCTION FAI 80	44,380	43,640
	17.60	18.15	0.55	2100 SOUTH	49,015	48,200
	18.15	18.71	0.56	1700 SOUTH STREET VIA 700 EAST	48,645	47,880
	18.71	19.27	0.56	1300 SOUTH STREET	42,270	41,570
	19.27	19.42	0.15	900 SOUTH STREET VIA 700 EAST STREET	42,270	41,570
	19.42	20.01	0.59	800 SOUTH STREET - 400 SOUTH STREET	42,270	41,570

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00072	**0.00**	**0.35**	**0.35**	*	**JUNCTION SR 24**	**670**	**630**
A00072	0.35	4.44	4.09		EAST INCORPORATED LIMITS LOA	445	420
	4.44	10.95	6.51		FREMONT	200	50
	10.95	35.35	24.40		WAYNE - SEVIER COUNTY LINE - FAI 70 FREMONT JUNCTION	200	50
A00073	**0.00**	**3.42**	**3.42**	*	**JUNCTION SR 36**	**1,215**	**1,200**
	3.42	15.75	12.33		ROAD TO TEST CENTER	690	680
	15.75	20.57	4.82		TOOELE - UTAH COUNTY LINE	690	680
	20.57	24.77	4.20		FAIRFIELD	965	980
	24.77	25.72	0.95		SOUTH INCORPORATED LIMITS CEDAR FORT	1,025	1,010
	25.72	36.28	10.56		NORTH INCORPORATED LIMITS CEDAR FORT	1,880	1,650
	36.28	38.38	2.10		JUNCTION SR 68	4,000	3,275
	38.38	38.95	0.57		WEST URBAN BOUNDARY	5,525	3,585
	38.95	40.67	1.72		WEST INCORPORATED LIMITS LEHI	8,130	7,700
	40.67	41.02	0.35		FAI 15 EAST OF LEHI - JUNCTION SR 89	6,050	5,600
A00074	**0.00**	**0.42**	**0.42**	*	**JUNCTION SR 89 MAIN STREET AMERICAN FORK**	**17,530**	**16,495**
	0.42	1.02	0.60		300 NORTH IN AMERICAN FORK	16,400	14,195
	1.02	1.75	0.73		700 NORTH VIA 100 EAST AMERICAN FORK	15,910	11,670
	1.75	2.09	0.34		NORTH INCORPORATED LIMITS AMERICAN FORK	11,320	9,710
	2.09	3.89	1.80		SOUTH INCORPORATED LIMITS HIGHLAND	11,320	9,710
	3.89	4.39	0.50		11000 NORTH SR 92	8,995	7,855
	4.39	5.67	1.28		N. INC. LIMITS HIGHLAND & S. INC. LIMITS ALPINE - 200 NORTH	8,715	7,750
A00075	**0.00**	**2.04**	**2.04**	*	**FAI 15 IRONTON INTERCHANGE - JUNCTION SR 89**	**13,220**	**13,085**
A00076	**0.00**	**2.57**	**2.57**	*	**IVY CREEK INTERCHANGE - SR 72 (FAI 70 FRONTAGE ROAD)**	**95**	**100**
A00077	**0.00**	**4.47**	**4.47**	*	**JUNCTION SR 147 SOUTH OF LAKESHORE**	**935**	**880**
	4.47	6.95	2.48		1750 WEST	1,015	1,025
	6.95	7.17	0.22		WEST INCORPORATED LIMITS SPRINGVILLE	910	1,025

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	7.17	7.54	0.37		JUNCTION FAI 15 VIA 400 SOUTH	12,135	12,830
A00077	7.54	8.60	1.06		EAST INCORPORATED LIMITS SPRINGVILLE	12,135	12,830
	8.60	9.06	0.46		WEST URBAN BOUNDARY SPRINGVILLE - SR 89	12,495	13,875
A00078	**0.00**	**8.90**	**8.90**	*	**JUNCTION FAI 15**	**2,400**	**2,260**
	8.90	9.22	0.32		WEST INCORPORATED LIMITS LEVAN - SR 28	2,030	1,915
A00079	**0.00**	**1.11**	**1.11**	*	**JUNCTION SR 126**	**12,145**	**11,705**
	1.11	1.74	0.63		WEST INCORPORATED LIMITS OGDEN	14,070	13,565
	1.74	2.32	0.58		FAI 15 31ST STREET INTCHANGE	25,040	24,575
	2.32	2.56	0.24		BEGINNING OF ONE WAY COUPLET EASTBOUND	11,690	11,470
	2.56	2.99	0.43		WALL AVE. - WASHINGTON BLVD. VIA 31ST STREET EASTBOUND	13,005	12,765
	2.99	3.41	0.42	*	WASHINGTON BOULEVARD VIA 30TH STREET TWO WAY	15,425	15,260
	3.41	4.13	0.72		MADISON AVENUE FAU 2027 - SR 203 VIA 30TH STREET	14,770	14,495
	4.13	4.56	0.43	*	WASHINGTON BOULEVARD VIA 30TH STREET WESTBOUND	15,845	15,550
	4.56	4.89	0.33		WALL AVENUE - 31ST STREET WESTBOUND	13,035	12,790
A00080	**0.00**	**1.48**	**1.48**	*	**NEVADA - UTAH STATE LINE**	**5,045**	**4,770**
	1.48	2.43	0.95		WENDOVER INTERCHANGE	7,265	6,870
	2.43	3.98	1.55		EAST INCORPORATED LIMITS WENDOVER	7,265	6,870
	3.98	41.30	37.32		BONNEVILLE SPEEDWAY INTERCHANGE	7,255	6,860
	41.30	56.21	14.91		KNOLLS INTERCHANGE	7,395	6,995
	56.21	61.85	5.64		ARAGONITE INTERCHANGE	7,740	7,320
	61.85	69.54	7.69		LAKESIDE INTERCHANGE	7,765	7,345
	69.54	76.46	6.92		DELLE INTERCHANGE	7,790	7,370
	76.46	83.45	6.99		ROWLEY INTERCHANGE	8,600	8,135
	83.45	88.51	5.06		STANSBURY INTERCHANGE	8,760	8,285
	88.51	98.77	10.26		BURMESTER INTERCHANGE	8,900	8,420
	98.77	101.41	2.64		TOOELE INTERCHANGE	25,335	24,015

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	101.41	101.61	0.20	LAKEPOINT JUNCTION INTERCHANGE	15,270	14,540
A00080	101.61	104.44	2.83	TOOELE- SALT LAKE COUNTY LINE	15,270	14,540
	104.44	109.49	5.05	GARFIELD CONNECTION	16,350	15,500
	109.49	111.47	1.98	SOUTH INCORPORATED LIMITS SALT LAKE CITY	16,350	15,500
	111.47	113.47	2.00	7200 WEST INTERCHANGE SALT LAKE URBAN BOUNDARY	17,770	16,845
	113.47	114.53	1.06	5600 WEST INTERCHANGE	26,180	24,815
	114.53	115.55	1.02	4800 WEST INTERCHANGE / WRIGHT BROTHERS EXIT	42,495	40,285
	115.55	117.48	1.93	4000 WEST INTERCHANGE (BANGERTER HIGHWAY)	36,540	34,640
	117.48	118.08	0.60	FAI 215 INTERCHANGE	30,515	29,060
	118.08	120.04	1.96	REDWOOD ROAD - JUNCTION FAI 15 IN SALT LAKE CITY	53,625	50,995
	120.05	121.11	1.07	* JUNCTION FAI 15 WEST INC. LIMITS SOUTH SALT LAKE	106,350	103,543
	121.11	121.71	0.60	STATE STREET INTERCHANGE	101,525	98,620
	121.71	122.01	0.30	E. INC. LIMITS S. SALT LAKE & W. INC. LIMITS SALT LAKE CITY	101,525	98,620
	122.01	122.94	0.93	700 EAST INTERCHANGE	95,535	92,805
	122.94	124.68	1.74	1300 EAST INTERCHANGE	76,485	74,300
	124.68	124.81	0.13	2300 EAST INTERCHANGE	52,550	51,050
	124.81	125.17	0.36	SR 215 OFF RAMP	27,597	26,400
	125.17	125.66	0.49	EAST INCORPORATED LIMITS SALT LAKE CITY	27,597	26,400
	125.66	126.59	0.93	FOOTHILL DRIVE OFF RAMP	25,167	24,075
	126.59	126.87	0.28	FAI 215 ON RAMP	38,420	35,350
	126.87	127.78	0.91	EAST URBAN BOUNDARY SALT LAKE CITY	38,420	35,350
	127.78	129.76	1.98	QUARRY INTERCHANGE CEMENT PLANT	38,320	35,255
	129.76	131.59	1.83	MOUNT AIRE INTERCHANGE	38,235	35,175
	131.59	134.05	2.46	MOUNT DELLE INTERCHANGE SR 65	36,985	34,025
	134.05	136.91	2.86	LAMBS CANYON INTERCHANGE	37,050	34,085
	136.91	137.36	0.45	SALT LAKE - SUMMIT COUNTY LINE	37,050	34,085

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	137.36	139.78	2.42		SUMMIT PARK INTERCHANGE	35,895	33,025
A00080	139.78	142.15	2.37		JEREMY RANCH INTERCHANGE	33,600	30,910
	142.15	144.85	2.70		KIMBALL JUNCTION INTERCHANGE SR 224	24,365	22,415
	144.85	148.73	3.88		SILVER CREEK JUNCTION INTERCHANGE	12,595	11,585
	148.73	153.03	4.30		RANCH INTERCHANGE	12,540	11,535
	153.03	159.77	6.74		WANSHIP INTERCHANGE	10,450	9,685
	159.77	160.70	0.93		WEST INCORPORATED LIMITS COALVILLE	10,470	9,685
	160.70	160.96	0.26		COALVILLE INTERCHANGE	10,470	9,685
	160.96	165.47	4.51		EAST INCORPORATED LIMITS COALVILLE	10,450	9,685
	165.47	165.94	0.47		JUNCTION FAI 84	12,772	11,862
	165.94	176.91	10.97		ECHO INTERCHANGE JUNCTION FAS 188	10,790	10,460
	176.91	182.36	5.45		EMORY INTERCHANGE	10,810	10,485
	182.36	186.04	3.68		CASTLEROCK INTERCHANGE	10,755	10,420
	186.04	189.97	3.93		BALL & MOORE INTERCHANGE	10,785	10,450
	189.97	194.99	5.02		WAHSATCH INTERCHANGE - UTAH - WYOMING STATE LINE	10,825	10,490
A00081	**0.00**	**1.72**	**1.72**	*	**JUNCTION SR 30**	**1,365**	**1,285**
	1.72	2.47	0.75		SOUTH INC. LIMITS FIELDING - JUNCTION LOCAL ROAD	1,350	1,270
A00082	**0.00**	**0.74**	**0.74**	*	**JUNCTION SR 102**	**10,280**	**9,695**
	0.74	0.99	0.25		NORTH INC. LIMITS TREMONTON & S. INC. LIMITS GARLAND	8,380	7,900
	0.99	2.01	1.02		1000 NORTH IN GARLAND	8,355	7,880
	2.01	2.63	0.62		FACTORY STREET IN GARLAND	5,105	4,815
	2.63	3.27	0.64		EAST INCORPORATED LIMITS GARLAND - JUNCTION SR 13	2,030	1,915
A00083	**0.00**	**1.54**	**1.54**	*	**JUNCTION SR 13**	**4,490**	**4,435**
	1.54	3.58	2.04		WEST INCORPORATED LIMITS CORINNE	4,155	4,105
	3.58	13.99	10.41		JUNCTION LOCAL ROAD	4,155	4,105
	13.99	17.44	3.45		JUNCTION SR 102	3,820	3,775

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	17.44	24.58	7.14		JUNCTION ROAD TO GOLDEN SPIKE (LAMPO JUNCTION)	1,095	1,080
A00083	24.58	31.60	7.02		SOUTH INCORPORATED LIMITS HOWELL - JUNCTION FAI 84	340	335
A00084	**0.00**	**4.67**	**4.67**	*	**UTAH - IDAHO STATE LINE**	**5,400**	**5,200**
	4.67	7.15	2.48		WEST SNOWVILLE INTERCHANGE	6,015	5,700
	7.15	12.03	4.88		SNOWVILLE INTERCHANGE	7,395	7,010
	12.03	15.87	3.84		RANCH EXIT	7,460	7,070
	15.87	17.45	1.58		HANSEL VALLEY INTERCHANGE	7,620	7,220
	17.45	20.41	2.96		EAST RATTLESNAKE INTERCHANGE	7,695	7,295
	20.41	24.56	4.15		BLUE CREEK INTERCHANGE	7,815	7,405
	24.56	25.86	1.30		POCATELLO VALLEY INTERCHANGE	8,170	7,745
	25.86	26.70	0.84		NORTH INCORPORATED LIMITS HOWELL	8,170	7,745
	26.70	27.48	0.78		HOWELL INTERCHANGE	8,195	7,765
	27.48	32.58	5.10		EAST INCORPORATED LIMITS HOWELL	8,195	7,765
	32.58	39.73	7.15		WHITES VALLEY INTERCHANGE	8,195	7,765
	39.73	41.06	1.33		BOTHWELL INTERCHANGE	7,810	7,400
	41.06	43.20	2.14		WEST TREMONTON INTERCHANGE-FAI 15	7,090	6,720
	43.21	44.49	1.29	*	JUNCTION FAI 15 IN OGDEN	7,190	6,485
	44.49	46.23	1.74		RIVERDALE ROAD INTERCHANGE	10,245	9,600
	46.23	46.64	0.41		SOUTH INCORPORATED LIMITS RIVERDALE	10,245	9,600
	46.64	47.36	0.72		WEBER - DAVIS COUNTY LINE	10,245	9,600
	47.36	50.60	3.24		SOUTH WEBER INTERCHANGE	7,940	7,440
	50.60	53.84	3.24		UINTAH JCT. INTERCHANGE & DAVIS - WEBER COUNTY LINE	10,650	9,985
	53.84	55.19	1.35		WEBER - MORGAN COUNTY LINE	10,650	9,985
	55.19	59.37	4.18		MOUNTAIN GREEN INTERCHANGE	8,985	8,420
	59.37	65.33	5.96		PETERSON STATION INTERCHANGE FAS 591	9,365	8,775
	65.33	66.21	0.88		WEST INCORPORATED LIMITS MORGAN	9,365	8,775

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	66.21	66.78	0.57		WEST MORGAN INTERCHANGE	6,735	6,315
A00084	66.78	66.96	0.18		EAST MORGAN INTERCHANGE	8,050	7,545
	66.96	69.05	2.09		EAST INCORPORATED LIMITS MORGAN	8,050	7,545
	69.05	71.16	2.11		ROUND VALLEY INTERCHANGE	8,005	7,500
	71.16	74.21	3.05		TAGGERT INTERCHANGE	7,870	7,375
	74.21	75.12	0.91		DEVILS SLIDE INTERCHANGE	7,265	6,805
	75.12	75.64	0.52		MORGAN - SUMMIT COUNTY LINE	7,265	6,805
	75.64	77.41	1.77		WEST HENEFER INTERCHANGE	6,725	6,300
	77.41	78.02	0.61		WEST INCORPORATED LIMITS HENEFER	6,725	6,300
	78.02	78.58	0.56		EAST HENEFER INTERCHANGE JUNCTION SR 65	5,810	5,445
	78.58	82.73	4.15		EAST INCORPORATED LIMITS HENEFER - FAI 80 ECHO JUNCTION	5,810	5,445
A00086	**0.00**	**1.88**	**1.88**	*	**JUNCTION FAI 84**	**490**	**460**
	1.88	2.11	0.23		NORTH INCORPORATED LIMITS HENEFER - JUNCTION SR 65	560	525
A00087	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 40**	**1,230**	**1,160**
	0.64	5.93	5.29		NORTH INCORPORATED LIMITS DUCHESNE	1,210	1,140
	5.93	15.59	9.66		JUNCTION SR 35	1,210	1,140
	15.59	18.58	2.99		LOCAL ROAD TO MOUNTAIN HOME	1,355	1,275
	18.58	20.88	2.30		JUNCTION LOCAL ROAD TO BONETA	1,935	1,825
	20.88	21.22	0.34		WEST INCORPORATED LIMITS ALTAMONT	1,020	960
	21.22	21.37	0.15		CENTER STREET ALTAMONT	1,020	960
	21.37	28.42	7.05		EAST INCORPORATED LIMITS ALTAMONT	1,020	960
	28.42	37.99	9.57		UPALCO - SR 40 SOUTHWEST OF ROOSEVELT	1,080	1,015
A00088	**0.00**	**9.96**	**9.96**	*	**OURAY**	**680**	**640**
	9.96	16.96	7.00		JUNCTION LOCAL ROAD - SR 40 SOUTH OF VERNAL	885	835
A00089	**0.00**	**5.03**	**5.03**	*	**ARIZONA - UTAH STATE LINE**	**1,615**	**1,585**
	5.03	8.87	3.84		EAST INCORPORATED LIMITS BIG WATER	1,775	1,745

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	8.87	54.93	46.06	WEST INCORPORATED LIMITS BIG WATER	1,775	1,745
A00089	54.93	61.59	6.66	JUNCTION LOCAL ROAD EAST OF KANAB	2,105	2,065
	61.59	64.18	2.59	EAST INCORPORATED LIMITS KANAB	4,375	4,175
	64.18	65.40	1.22	JUNCTION SR 11	6,150	5,870
	65.40	81.62	16.22	NORTH INCORPORATED LIMITS KANAB	2,665	2,665
	81.62	85.25	3.63	JUNCTION SR 9 MOUNT CARMEL JUNCTION	1,890	2,035
	85.25	86.99	1.74	WEST INCORPORATED LIMITS ORDERVILLE	2,310	2,310
	86.99	89.71	2.72	NORTHEAST INCORPORATED LIMITS ORDERVILLE	2,180	2,080
	89.71	90.51	0.80	SOUTH INCORPORATED LIMITS GLENDALE	2,195	2,095
	90.51	104.20	13.69	NORTH INCORPORATED LIMITS GLENDALE	1,395	1,330
	104.20	108.32	4.12	JUNCTION SR 14 LONG VALLEY JUNCTION	1,395	1,330
	108.32	116.36	8.04	KANE - GARFIELD COUNTY LINE	1,415	1,330
	116.36	117.01	0.65	SOUTH INCORPORATED LIMITS HATCH	2,230	2,125
	117.01	124.85	7.84	NORTH INCORPORATED LIMITS HATCH	2,170	2,070
	124.85	131.17	6.32	JUNCTION SR 12 BRYCE CANYON JUNCTION	2,665	2,545
	131.17	131.74	0.57	EAST INCORPORATED LIMITS PANGUITCH	5,315	5,075
	131.74	132.63	0.89	CENTER OF PANGUITCH	6,635	6,335
	132.63	141.81	9.18	NORTH INCORPORATED LIMITS PANGUITCH	2,215	2,215
	141.81	156.98	15.17	JUNCTION SR 20 IN ORTON	1,195	1,205
	156.98	160.81	3.83	GARFIELD - PIUTE COUNTY LINE & S. INC. LIMITS CIRCLEVILLE	1,195	1,205
	160.81	163.17	2.36	EAST INCORPORATED LIMITS CIRCLEVILLE	1,740	1,755
	163.17	165.81	2.64	SOUTH INCORPORATED LIMITS JUNCTION	1,740	1,755
	165.81	167.85	2.04	JUNCTION SR 153 (IN JUNCTION)	1,740	1,755
	167.85	179.07	11.22	NORTH INCORPORATED LIMITS JUNCTION	1,105	1,105
	179.07	181.38	2.31	SOUTH INCORPORATED LIMITS MARYSVALE	1,620	1,620
	181.38	185.58	4.20	NORTH INCORPORATED LIMITS MARYSVALE	1,420	1,395

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	185.58	193.31	7.73	PIUTE - SEVIER CNTY LINE - JUNCTION FAI 70 SEVIER JUNCTION	1,420	1,395
A00089	193.32	194.78	1.47	* JUNCTION FAI 70 SOUTH INCORPORATED LIMITS SALINA	4,650	4,430
	194.78	195.08	0.30	300 SOUTH IN SALINA	5,195	4,945
	195.08	195.74	0.66	JUNCTION SR 50 IN SALINA	7,145	6,970
	195.74	200.67	4.93	NORTH INCORPORATED LIMITS SALINA	6,795	6,470
	200.67	206.49	5.82	SANPETE - SEVIER COUNTY LINE	6,195	6,015
	206.49	207.86	1.37	SOUTH INCORPORATED LIMITS CENTERFIELD	6,450	6,380
	207.86	209.50	1.64	NORTH INC. LIMITS CENTERFIELD & S. INC. LIMITS GUNNISON	8,855	8,770
	209.50	211.09	1.59	JUNCTION SR 28 IN GUNNISON	2,830	2,795
	211.09	215.90	4.81	EAST INCORPORATED LIMITS GUNNISON	2,955	2,920
	215.90	217.31	1.41	JUNCTION SR 137 NORTH OF MAYFIELD	2,955	2,920
	217.31	217.90	0.59	SOUTH INCORPORATED LIMITS STERLING	3,170	3,130
	217.90	222.92	5.02	NORTH INCORPORATED LIMITS STERLING	3,655	3,290
	222.92	224.67	1.75	SOUTH INCORPORATED LIMITS MANTI	7,650	7,560
	224.67	230.24	5.57	NORTH INCORPORATED LIMITS MANTI	5,505	5,440
	230.24	231.74	1.50	SOUTH INCORPORATED LIMITS EPHRAIM	6,310	6,370
	231.74	235.53	3.79	NORTH INCORPORATED LIMITS EPHRAIM	5,245	5,105
	235.53	244.92	9.39	JUNCTION SR 132 PIGEON HOLLOW JUNCTION	2,330	2,300
	244.92	246.11	1.19	SOUTH INCORPORATED LIMITS MOUNT PLEASANT	3,600	3,510
	246.11	246.63	0.52	JUNCTION SR 116 IN MOUNT PLEASANT	3,915	3,870
	246.63	251.47	4.84	NORTH INCORPORATED LIMITS MOUNT PLEASANT	2,960	2,810
	251.47	252.26	0.79	SOUTH INCORPORATED LIMITS FAIRVIEW	4,200	4,015
	252.26	252.69	0.43	JUNCTION SR 31 IN FAIRVIEW	2,810	2,625
	252.69	265.38	12.69	NORTH INCORPORATED LIMITS FAIRVIEW	1,980	1,800
	265.38	281.20	15.82	SANPETE - UTAH COUNTY LINE - SR 6 BILLIES MOUNTAIN	1,980	1,800
	281.20	282.74	1.54	* JUNCTION SR 6 AT MOARK JUNCTION & SOUTH URBAN BOUND	3,230	3,045

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	282.74	283.52	0.78	SOUTH INCORPORATED LIMITS MAPLETON	4,225	4,145
A00089	283.52	284.41	0.89	SOUTH OF MAPLETON	5,430	5,330
	284.41	284.62	0.21	IN MAPLETON	6,575	6,450
	284.62	285.68	1.06	JUNCTION SR 147 IN MAPLETON	8,200	8,045
	285.68	286.62	0.94	NORTH INC. LIMITS MAPLETON & S. INC. LIMITS SPRINGVILLE	7,720	7,575
	286.62	286.93	0.31	JUNCTION SR 51 APPROXIMATE 600 SOUTH IN SPRINGVILLE	15,710	15,420
	286.93	287.31	0.38	400 SOUTH VIA MAIN STREET IN SPRINGVILLE	17,085	16,765
	287.31	287.70	0.39	CENTER STREET IN SPRINGVILLE	19,595	19,230
	287.70	288.62	0.92	400 NORTH IN SPRINGVILLE	20,455	20,075
	288.62	289.05	0.43	JUNCTION SR 75 ROAD TO IRONTON INTERCHANGE	17,745	17,415
	289.05	292.23	3.18	NORTH INC. LIMITS SPRINGVILLE & SOUTH INC. LIMITS PROVO	17,230	17,160
	292.23	292.88	0.65	700 EAST IN PROVO	18,955	18,605
	292.88	293.61	0.73	SR 189 UNIVERSITY AVENUE IN PROVO VIA 300 SOUTH	23,075	22,645
	293.61	294.33	0.72	CENTER STREET SR 114 IN PROVO VIA 300 SOUTH	31,495	30,940
	294.33	294.77	0.44	800 NORTH FAU 3030 IN PROVO VIA 500 WEST	37,935	37,230
	294.77	295.69	0.92	1230 NORTH FAU 3032 IN PROVO VIA 500 WEST	49,855	48,930
	295.69	296.61	0.92	NORTH INC. LIMITS PROVO & SOUTH INC. LIMITS OREM	49,855	48,930
	296.61	297.26	0.65	UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265 IN OREM	45,440	44,600
	297.26	298.33	1.07	800 SOUTH STREET FAU 3042 IN OREM	48,655	47,755
	298.33	299.39	1.06	CENTER STREET IN OREM VIA STATE STREET	47,570	46,690
	299.39	300.45	1.06	800 NORTH SR 52 IN OREM	38,825	38,105
	300.45	301.02	0.57	1600 NORTH STREET IN OREM	25,600	23,705
	301.02	302.33	1.31	NORTH INC. LIMITS OREM & SOUTH INC. LIMITS LINDON	23,400	20,890
	302.33	303.28	0.95	NORTH INC. LIMITS LINDON & S. INC. LIMITS PLEASANT GROVE	21,770	18,630
	303.28	305.04	1.76	JUNCTION SR 114 MAIN STREET PLEASANT GROVE	16,200	14,085
	305.04	305.93	0.89	NORTHWEST INCORPORATED LIMITS PLEASANT GROVE	22,720	19,935

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	305.93	306.16	0.23	JUNCTION SR 180 500 EAST AMERICAN FORK	30,875	27,570
A00089	306.16	306.54	0.38	EAST INCORPORATED LIMITS AMERICAN FORK	30,875	27,570
	306.54	307.32	0.78	JUNCTION SR 74 100 EAST IN AMERICAN FORK	22,765	20,420
	307.32	308.40	1.08	WEST INCORPORATED LIMITS AMERICAN FORK	12,650	10,455
	308.40	308.59	0.19	EAST URBAN BOUNDARY LEHI	14,110	13,845
	308.59	309.14	0.55	JUNCTION SR 73 SOUTHEAST OF LEHI	14,110	13,845
	309.14	311.27	2.13	SOUTHEAST INCORPORATED LIMITS LEHI	8,775	9,145
	311.27	311.49	0.22	DIVIDED HIGHWAY LEHI - FAI 15 URBAN BOUNDARY LEHI	6,185	5,960
	311.49	312.05	0.56	* JUNCTION FAI 15 DRAPER CROSSROADS	18,205	18,555
	312.05	313.05	1.00	NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	18,205	18,555
	313.05	314.54	1.49	10600 SOUTH	19,990	20,390
	314.54	315.06	0.52	9400 SOUTH VIA STATE STREET	20,990	21,975
	315.06	315.53	0.47	9000 SOUTH STREET	23,875	23,430
	315.53	315.93	0.40	8600 SOUTH STREET IN SANDY VIA STATE STREET	25,735	25,260
	315.93	316.54	0.61	NORTH INC. LIMITS SANDY & S. INC. LIMITS MIDVALE 8340 SOUTH	22,610	24,650
	316.54	316.92	0.38	7800 SOUTH STREET	37,755	37,055
	316.92	317.31	0.39	NORTH INCORPORATED LIMITS MIDVALE	37,755	37,055
	317.31	317.81	0.50	7200 SOUTH STREET	33,720	33,720
	317.81	318.07	0.26	SOUTH INCORPORATED LIMITS MURRAY VIA STATE STREET	35,135	36,225
	318.07	318.84	0.77	JUNCTION FAI 215 NEAR 6400 SOUTH IN MURRAY	35,135	36,220
	318.84	319.74	0.90	5900 SOUTH STREET IN MURRAY VIA STATE STREET	31,545	34,175
	319.74	320.31	0.57	5300 SOUTH STREET	31,890	35,675
	320.31	320.49	0.18	VINE STREET IN MURRAY VIA STATE STREET	31,890	35,675
	320.49	321.00	0.51	4800 SOUTH STREET IN MURRAY	33,085	36,760
	321.00	321.14	0.14	4500 SOUTH STREET IN MURRAY VIA STATE STREET	31,115	36,265

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	321.14	321.87	0.73	NORTH INCORPORATED LIMITS MURRAY	30,460	35,420
	321.87	322.75	0.88	3900 SOUTH STREET VIA STATE STREET	29,685	35,880
A00089	322.75	323.63	0.88	3300 SOUTH STREET & SOUTH INC. LIMITS SOUTH SALT LAKE	33,300	36,185
	323.63	324.02	0.39	2700 SOUTH STREET IN SOUTH SALT LAKE	38,055	38,055
	324.02	324.51	0.49	JUNCTION FAI 80 VIA STATE STREET IN SOUTH SALT LAKE	41,180	40,415
	324.51	325.07	0.56	2100 S. STREET N. INC. LIMITS S. SALT LAKE & S. INC. LIMITS S.L.C.	31,375	30,795
	325.07	325.62	0.55	1700 SOUTH STREET VIA STATE STREET IN SALT LAKE CITY	31,200	30,445
	325.62	326.18	0.56	1300 SOUTH STREET IN SALT LAKE CITY	33,830	32,220
	326.18	326.93	0.75	900 SOUTH STREET IN SALT LAKE CITY	36,820	35,065
	326.93	327.53	0.60	400 SOUTH STREET VIA STATE STREET IN SALT LAKE CITY	32,235	30,700
	327.53	327.68	0.15	SOUTH TEMPLE STREET IN SALT LAKE CITY	31,250	29,760
	327.68	328.27	0.59	NORTH TEMPLE STREET IN SALT LAKE CITY	25,855	29,645
	328.27	329.01	0.74	300 WEST STREET VIA NORTH TEMPLE STREET	22,725	21,910
	329.01	329.88	0.87	600 NORTH VIA 300 WEST STREET IN SALT LAKE CITY	24,345	23,470
	329.88	331.96	2.08	VICTORY ROAD VIA 300 WEST STREET - FAI 15	34,520	33,280
	331.97	332.12	0.16	* JUNCTION FAI 15	29,500	28,440
	332.12	332.49	0.37	ORCHARD DRIVE	19,670	18,960
	332.49	333.52	1.03	CENTER STREET FAU 1072	14,770	14,885
	333.52	334.04	0.52	JUNCTION (OLD SR 93) WOODS CROSS	19,965	19,760
	334.04	334.45	0.41	N. INC. LM. N. SALT LAKE & S. INC. LM. BOUNTIFUL (2600 SOUTH)	32,970	31,795
	334.45	335.65	1.20	JUNCTION SR 106 PARKIN JUNCTION	18,220	17,565
	335.65	336.33	0.68	500 SOUTH STREET IN BOUNTIFUL VIA 500 WEST	27,595	26,605
	336.33	336.73	0.40	400 NORTH STREET SR 131-FAI 15	13,305	12,825
	336.74	337.07	0.34	* JUNCTION FAI 15 WEST OF FARMINGTON	34,245	33,610
	337.07	338.66	1.59	BURKE LANE	27,715	27,200
	338.66	339.00	0.34	JUNCTION SR 273	27,275	26,770

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	339.00	340.03	1.03	N. INC. LIMITS FARMINGTON& S. INC. LIMITS FRUIT HEIGHTS	27,275	26,770
A00089	340.03	341.18	1.15	JUNCTION 200 SOUTH IN FRUIT HEIGHTS	23,775	24,085
	341.18	342.04	0.86	NORTH INC. LIMITS FRUIT HEIGHTS & S. INC. LIMITS KAYSVILLE	26,785	26,785
	342.04	342.46	0.42	NORTH INC. LIMITS KAYSVILLE & SOUTH INC. LIMITS LAYTON	26,785	26,785
	342.46	345.59	3.13	JUNCTION SR 109 IN LAYTON	24,885	25,210
	345.59	345.91	0.32	JUNCTION SR 193 IN LAYTON	35,045	35,500
	345.91	346.16	0.25	NORTH INCORPORATED LIMITS LAYTON	35,045	35,500
	346.16	347.67	1.51	SOUTH INCORPORATED LIMITS SOUTH WEBER	33,530	38,240
	347.67	347.88	0.21	WEBER - DAVIS COUNTY LINE	34,910	38,240
	347.88	347.93	0.05	FAI 84 UINTAH JUNCTION	37,285	37,285
	347.93	348.68	0.75	SOUTH INCORPORATED LIMITS UINTAH	37,285	37,285
	348.68	349.80	1.12	NORTH INCORPORATED LIMITS UINTAH	37,285	37,285
	349.80	349.95	0.15	HARRISON BOULEVARD	18,325	18,750
	349.95	350.67	0.72	SOUTH INCORPORATED LIMITS SOUTH OGDEN	18,325	18,750
	350.67	353.58	2.91	50TH STREET	21,560	22,070
	353.58	353.77	0.19	N. INC. LIMITS S. OGDEN& S. INC. LIMITS OGDEN 36TH STREET	21,630	22,140
	353.77	354.29	0.52	JUNCTION SR 26 RIVERDALE ROAD	26,295	26,940
	354.29	354.43	0.14	31ST STREET IN OGDEN VIA WASHINGTON BOULEVARD	28,100	28,790
	354.43	355.30	0.87	30TH STREET VIA WASHINGTON BOULEVARD	29,555	29,555
	355.30	355.88	0.58	24TH STREET SR 53 IN OGDEN	25,800	25,320
	355.88	356.78	0.90	20TH STREET IN OGDEN	25,115	25,025
	356.78	357.81	1.03	12TH STREET SR 39	28,850	28,765
	357.81	358.38	0.57	2ND STREET VIA WASHINGTON BOULEVARD	22,320	21,905
	358.38	358.74	0.36	NORTH INC. LIMITS OGDEN & S. INC. LIMITS HARRISVILLE BLVD.	22,320	21,905
	358.74	360.83	2.09	WALL AVENUE	20,145	19,770
	360.83	361.61	0.78	N. INC. LIMITS HARRISVILLE & S. INC. LIMITS PLEASANT VIEW	20,145	19,770

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	361.61	363.79	2.18		JUNCTION SR 134 IN PLEASANT VIEW	11,075	10,675
A00089	363.79	364.07	0.28		JUNCTION PLEASANT VIEW DRIVE	8,840	8,670
	364.07	364.55	0.48		BOX ELDER - WEBER COUNTY LINE	8,160	8,065
	364.55	367.63	3.08		JUNCTION SR 126	10,520	10,400
	367.63	370.01	2.38		SOUTH INCORPORATED LIMITS WILLARD	9,495	9,385
	370.01	371.12	1.11		JUNCTION SR 315 TO FAI 15	9,495	9,385
	371.12	372.05	0.93		NORTH INCORPORATED LIMITS WILLARD	10,715	10,715
	372.05	374.62	2.57		SOUTH INCORPORATED LIMITS PERRY	10,715	10,715
	374.62	374.75	0.13		N. INC. LIMITS PERRY & S. INC. LIMITS BRIGHAM CITY - SR 91	10,715	10,715
	374.75	375.54	0.79	*	JUNCTION SR 91 IN LOGAN	24,200	23,850
	375.54	377.62	2.08		600 EAST IN LOGAN	18,115	17,780
	377.62	377.65	0.03		EAST INCORPORATED LIMITS LOGAN	18,115	17,780
	377.65	387.27	9.62		EAST URBAN BOUNDARY LOGAN	3,625	3,555
	387.27	396.50	9.23		BOY SCOUT CAMP	2,410	2,300
	396.50	402.57	6.07		TONY GROVE RANGER STATION	2,155	2,155
	402.57	407.61	5.04		JUNCTION SR 243 ROAD TO BEAVER MOUNTAIN	1,710	1,715
	407.61	410.20	2.59		RICH - CACHE COUNTY LINE	1,710	1,715
	410.20	414.64	4.44		WEST INCORPORATED LIMITS GARDEN CITY	1,490	1,495
	414.64	415.84	1.20		JUNCTION SR 30 IN GARDEN CITY	1,705	1,685
	415.84	418.71	2.87		NORTH INC. LIMITS GARDEN CITY - UTAH - IDAHO STATE LINE	1,705	1,685
A00090	**0.00**	**0.48**	**0.48**	*	**JUNCTION SR 13 MAIN STREET**	**8,680**	**8,365**
	0.48	1.61	1.13		JUNCTION 600 EAST STREET - SR 91 BRIGHAM CITY	3,745	3,610
A00091	**0.00**	**0.48**	**0.48**	*	**JUNCTION FAI 15**	**15,095**	**14,755**
	0.48	1.35	0.87		SOUTHWEST INCORPORATED LIMITS BRIGHAM CITY	15,095	14,755
	1.35	1.96	0.61		JUNCTION 500 WEST	18,835	17,715
	1.96	3.82	1.86		JUNCTION SR 89 AND MAIN STREET	12,330	11,595

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	3.82	4.96	1.14	JUNCTION SR 90 IN BRIGHAM CITY	16,560	15,575
	4.96	5.63	0.67	EAST INCORPORATED LIMITS BRIGHAM CITY	16,560	15,575
A00091	5.63	7.72	2.09	WEST INCORPORATED LIMITS MANTUA	15,245	14,335
	7.72	10.00	2.28	NORTH INCORPORATED LIMITS MANTUA	13,425	12,625
	10.00	16.59	6.59	CACHE - BOX ELDER COUNTY LINE	13,425	12,625
	16.59	16.86	0.27	SOUTH INCORPORATED LIMITS WELLSVILLE	13,425	12,625
	16.86	19.13	2.27	JUNCTION SR 23	13,425	12,625
	19.13	19.55	0.42	JUNCTION SR 101 IN WELLSVILLE	13,275	12,485
	19.55	23.27	3.72	NORTH INCORPORATED LIMITS WELLSVILLE	13,275	12,485
	23.27	24.27	1.00	SOUTHWEST URBAN BOUNDARY LOGAN	13,085	12,840
	24.27	25.60	1.33	SOUTH INCORPORATED LIMITS LOGAN	13,890	13,630
	25.60	26.19	0.59	JUNCTION SR 165	29,720	29,170
	26.19	26.83	0.64	JUNCTION SR 238 300 SOUTH LOGAN	27,020	26,520
	26.83	27.09	0.26	JUNCTION 200 NORTH SR 30 IN LOGAN VIA MAIN STREET	31,975	31,380
	27.09	28.51	1.42	400 NORTH SR 89 IN LOGAN	27,370	31,405
	28.51	28.89	0.38	NORTH INC. LIMITS LOGAN & SOUTH INC. LIMITS NORTH LOGAN	25,830	26,410
	28.89	29.78	0.89	NORTH URBAN BOUNDARY LOGAN	25,830	26,410
	29.78	30.59	0.81	JUNCTION 2500 NORTH TO AIRPORT IN NORTH LOGAN	24,950	25,460
	30.59	31.26	0.67	NORTH INCORPORATED LIMITS NORTH LOGAN	25,490	25,015
	31.26	31.81	0.55	JUNCTION SR 237 ROAD TO HYDE PARK	25,490	25,015
	31.81	32.41	0.60	NORTH INCORPORATED LIMITS HYDE PARK	25,490	25,015
	32.41	33.98	1.57	SOUTH INCORPORATED LIMITS SMITHFIELD	20,975	20,585
	33.98	34.98	1.00	JUNCTION SR 218 IN SMITHFIELD	14,205	13,940
	34.98	35.50	0.52	NORTH INCORPORATED LIMITS SMITHFIELD	9,815	9,460
	35.50	38.64	3.14	NORTH URBANIZED BOUNDARY	9,815	9,460
	38.64	39.96	1.32	SOUTH INCORPORATED LIMITS RICHMOND	9,560	9,450

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	39.96	41.15	1.19		JUNCTION SR 142 IN RICHMOND	9,685	9,310
	41.15	43.24	2.09		NORTH INCORPORATED LIMITS RICHMOND	8,195	7,880
A00091	43.24	43.64	0.40		SOUTH INCORPORATED LIMITS LEWISTON	8,195	7,880
	43.64	43.89	0.25		JUNCTION SR 61 IN LEWISTON	5,410	5,195
	43.89	45.22	1.33		NORTH INC. LIMITS LEWISTON - UTAH - IDAHO STATE LINE	5,410	5,195
A00092	**0.00**	**3.73**	**3.73**	*	**JUNCTION FAI 15 NORTH OF LEHI**	**9,250**	**8,260**
	3.73	5.65	1.92		JUNCTION 6800 WEST	8,460	7,150
	5.65	7.40	1.75		JUNCTION SR 74	8,200	7,150
	7.40	7.81	0.41		JUNCTION SR 146 SOUTHEAST OF ALPINE	2,000	1,785
	7.81	9.52	1.71		WEST URBAN BOUNDARY	2,000	1,785
	9.52	22.50	12.98		WEST BOUNDARY TIMPANOGOS NATIONAL MONUMENT	750	450
	22.50	27.18	4.68		ASPEN GROVE - SR 189 PROVO CANYON	900	660
A00093	**0.00**	**0.35**	**0.35**	*	**JUNCTION FAI 15 - JUNCTION SR 89 VIA 2600 SOUTH**	**26,130**	**26,710**
A00094	**0.00**	**0.94**	**0.94**	*	**JUNCTION FAI 70 - THOMPSON**	**615**	**590**
A00095	**0.00**	**16.15**	**16.15**	*	**JUNCTION SR 24 IN HANKSVILLE**	**625**	**560**
	16.15	26.14	9.99		WAYNE - GARFIELD COUNTY LINE	625	560
	26.14	47.43	21.29		JUNCTION SR 276	335	300
	47.43	83.65	36.22		GARFIELD - SAN JUAN COUNTY LINE	335	300
	83.65	91.26	7.61		JUNCTION SR 276 TO HALLS CROSSING	335	300
	91.26	121.50	30.24		JUNCTION SR 275 ROAD TO NATURAL BRIDGES - SR 191	465	460
A00096	**0.00**	**5.69**	**5.69**	*	**CLEAR CREEK**	**480**	**450**
	5.69	6.56	0.87		SOUTH INCORPORATED LIMITS SCOFIELD	610	575
	6.56	13.57	7.01		NORTH INCORPORATED LIMITS SCOFIELD	750	705
	13.57	22.65	9.08		CARBON - UTAH COUNTY LINE - JUNCTION SR 6	750	705
A00097	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 108**	**9,335**	**9,000**
	0.50	1.25	0.75		WEST INCORPORATED LIMITS ROY VIA 5600 SOUTH	10,940	10,545

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.25	2.01	0.76		JUNCTION 2500 WEST STREET	17,275	16,655
	2.01	2.27	0.26		JCT. SR 126 VIA 5600 SOUTH - ENTRANCE HILL AIR FORCE BASE	23,385	22,545
A00098	**0.00**	**2.03**	**2.03**	*	**JUNCTION SR 37 HOOPER**	**3,055**	**2,880**
	2.03	3.02	0.99		WEST URBAN BOUNDARY - SR 108	4,155	4,005
A00099	**0.00**	**1.18**	**1.18**	*	**JUNCTION FAI 15**	**3,040**	**3,040**
	1.18	3.10	1.92		SOUTH INCORPORATED LIMITS FILLMORE	2,695	2,990
	3.10	4.08	0.98		JUNCTION SR 100 IN FILLMORE	5,000	5,405
	4.08	4.20	0.12		NORTH INCORPORATED LIMITS FILLMORE - FAI 15	2,685	3,480
A00100	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 99 IN FILLMORE**	**850**	**725**
	1.60	4.67	3.07		WEST INCORPORATED LIMITS FILLMORE	735	570
	4.67	16.98	12.31		JUNCTION LOCAL ROAD EAST OF FLOWELL - JUNCTION SR 50	515	440
A00101	**0.00**	**1.21**	**1.21**	*	**JUNCTION SR 23 IN WELLSVILLE**	**2,345**	**2,270**
	1.21	1.82	0.61		JUNCTION SR 91	3,775	3,560
	1.82	3.09	1.27		EAST INCORPORATED LIMITS WELLSVILLE	3,555	3,350
	3.09	5.91	2.82		WEST INCORPORATED LIMITS HYRUM	3,515	3,315
	5.91	6.02	0.11		JUNCTION SR 165 IN HYRUM	1,115	1,050
	6.02	8.10	2.08		EAST INCORPORATED LIMITS HYRUM	985	925
	8.10	21.23	13.13		WASATCH NATIONAL FOREST BOUNDARY	885	835
	21.23	21.73	0.50		HARDWARE RANCH - VISITORS CENTER	730	685
A00102	**0.00**	**9.40**	**9.40**	*	**JUNCTION SR 83**	**750**	**705**
	9.40	14.13	4.73		THATCHER	1,380	1,300
	14.13	14.39	0.26		JUNCTION FAI 84	4,200	3,960
	14.39	17.50	3.11		WEST INCORPORATED LIMITS TREMONTON	7,125	6,720
	17.50	18.00	0.50		JUNCTION SR 13	3,460	3,260
	18.00	19.86	1.86		EAST INCORPORATED LIMITS TREMONTON	2,855	2,690
	19.86	20.07	0.21		DEWEYVILLE WEST INCORPORATED LIMITS - JUNCTION SR 38	3,315	3,125

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00103	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 126 - 600 NORTH ENTRANCE HILL AFB**	**25,860**	**24,930**
A00104	**0.00**	**0.78**	**0.78**	*	**JUNCTION SR 126 AT WILSON**	**11,990**	**11,305**
A00104	0.78	1.00	0.22		JUNCTION FAI 15	11,855	11,180
	1.00	1.51	0.51		WEST URBAN BOUNDARY OGDEN	11,855	11,180
	1.51	1.88	0.37		WEST INCORPORATED LIMITS OGDEN	12,625	12,170
	1.88	2.49	0.61		BEGIN DIVIDED HIGHWAY - WALL AVENUE EASTBOUND	6,315	6,085
	2.49	3.08	0.59	*	ONE WAY COUPLET WESTBOUND - END OF DIVIDED	6,315	6,085
A00105	**0.00**	**0.70**	**0.70**	*	**JUNCTION FAI 15 - SR 106 PARRISH LANE CENTERVILLE**	**18,175**	**17,520**
A00106	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 89 IN BOUNTIFUL**	**9,810**	**8,155**
	0.64	1.32	0.68		1500 SOUTH STREET FIVE POINTS	12,910	12,445
	1.32	1.98	0.66		500 SOUTH STREET	10,880	10,490
	1.98	2.23	0.25		400 NORTH STREET	14,520	14,000
	2.23	2.74	0.51		JUNCTION MAIN STREET VIA 400 NORTH	13,165	11,430
	2.74	3.02	0.28		1000 NORTH STREET	11,410	11,000
	3.02	4.23	1.21		NORTH INC. LIMITS BOUNTIFUL & S. INC. LIMITS CENTERVILLE	10,175	9,810
	4.23	6.39	2.16		JUNCTION SR 105 PARRISH LANE	12,375	11,930
	6.39	8.50	2.11		NORTH INC. LIMITS CENTERVILLE & S. INC. LIMITS FARMINGTON	5,655	5,450
	8.50	9.50	1.00		JUNCTION SR 227 STATE STREET FARMINGTON	10,715	9,200
	9.50	10.25	0.75		JUNCTION SR 225 IN FARMINGTON	4,980	4,800
	10.25	10.62	0.37		JUNCTION SR 272 IN FARMINGTON - SR 89	6,210	6,050
A00107	**0.00**	**2.50**	**2.50**	*	**JUNCTION SR 110**	**3,770**	**3,670**
	2.50	3.00	0.50		JUNCTION SR 108 IN WEST POINT	7,120	6,255
	3.00	3.08	0.08		EAST INCORPORATED LIMITS WEST POINT	7,430	7,240
	3.08	3.51	0.43		WEST INCORPORATED LIMITS CLEARFIELD	7,430	7,240
	3.51	4.50	0.99		1000 WEST - JUNCTION SR 126 IN CLEARFIELD	10,045	9,790
A00108	**0.00**	**0.92**	**0.92**	*	**JUNCTION SR 232**	**12,660**	**12,205**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.92	1.45	0.53		JUNCTION FAI 15 SYRACUSE INTERCHANGE	31,455	30,325
	1.45	1.75	0.30		JUNCTION SR 126	26,835	24,720
A00108	1.75	2.32	0.57		1000 WEST INC. LIMITS LAYTON& EAST INC. LIMITS CLEARFIELD	21,425	20,405
	2.32	3.75	1.43		ENTRANCE TO FREEPORT CENTER	12,575	12,120
	3.75	4.84	1.09		WEST INC. LIMITS CLEARFIELD & EAST INC. LIMITS SYRACUSE	12,575	12,120
	4.84	6.22	1.38		JUNCTION SR 127 IN SYRACUSE	5,070	4,885
	6.22	6.75	0.53		NORTH INC. LIMITS SYRACUSE & SOUTH INC. LIMITS WEST POINT	3,775	3,640
	6.75	7.25	0.50		JUNCTION SR 107 IN WEST POINT	4,275	3,955
	7.25	8.26	1.01		NORTH INC. LIMITS WEST POINT & SOUTH INC. LIMITS CLINTON	4,745	4,575
	8.26	9.14	0.88		JUNCTION SR 37 IN CLINTON	4,790	4,615
	9.14	9.63	0.49		DAVIS-WEBER CNTY LINE INC. LIMITS CLINTON& S. INC. LM ROY	6,800	6,555
	9.63	9.76	0.13		WEST INCORPORATED LIMITS ROY	6,800	6,555
	9.76	12.09	2.33		JUNCTION 5600 SOUTH STREET SR 97	7,265	7,265
	12.09	13.67	1.58		JUNCTION SR 37 4000 SOUTH STREET - SR 126	9,725	10,240
A00109	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 126**	**16,245**	**15,660**
	0.44	1.41	0.97		JUNCTION 425 EAST STREET (FORT LANE) LAYTON	13,570	12,955
	1.41	2.96	1.55		EAST INCORPORATED LIMITS OF LAYTON - SR 89	5,835	5,625
A00110	**0.00**	**0.68**	**0.68**	*	**JUNCTION SR 127**	**930**	**905**
	0.68	1.98	1.30		SOUTH INCORPORATED LIMITS WEST POINT	930	905
	1.98	3.47	1.49		JUNCTION SR 107 - JUNCTION SR 37 WEST OF CLINTON	1,230	1,195
A00111	**0.00**	**2.31**	**2.31**	*	**JUNCTION SR 48 EAST OF COPPERTON**	**2,965**	**2,930**
	2.31	4.42	2.11		7800 SOUTH NORTH INCORPORATED LIMITS WEST JORDAN	3,025	2,990
	4.42	5.70	1.28		SOUTH INCORPORATED LIMITS WEST VALLEY CITY	3,025	2,990
	5.70	7.03	1.33		5400 SOUTH STREET SR 173	6,280	6,585
	7.03	8.06	1.03		BACCHUS(URBANIZED BOUNDARY)	9,945	9,655
	8.06	9.07	1.01		4100 SOUTH NORTH INCORPORATED LIMITS WEST VALLEY CITY	13,000	12,050

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	9.07	9.56	0.49		JUNCTION 3500 SOUTH SR 171 VIA 8400 WEST	13,935	12,300
	9.56	10.55	0.99		3100 SOUTH IN MAGNA - 2100 SOUTH	10,000	9,155
A00112	**0.00**	**0.61**	**0.61**	*	**JUNCTION SR 138**	**5,805**	**5,475**
	0.61	6.83	6.22		EAST INCORPORATED LIMITS GRANTSVILLE	5,805	5,475
	6.83	8.57	1.74		WEST INCORPORATED LIMITS TOOELE - JUNCTION SR 36	6,810	6,635
A00113	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 189**	**1,390**	**1,190**
	1.48	3.27	1.79		NORTH INCORPORATED LIMITS CHARLESTON	1,775	1,575
	3.27	3.89	0.62		SOUTH INCORPORATED LIMITS MIDWAY	2,105	1,985
	3.89	4.76	0.87		JUNCTION SR 224 IN MIDWAY	6,455	6,085
	4.76	6.27	1.51		EAST INCORPORATED LIMITS MIDWAY	6,260	5,900
	6.27	7.11	0.84		WEST INCORPORATED LIMITS HEBER - SR 40 IN HEBER	6,155	5,805
A00114	**0.00**	**0.91**	**0.91**	*	**JUNCTION 500 WEST STREET IN PROVO**	**34,365**	**33,730**
	0.91	1.42	0.51		JUNCTION FAI 15 VIA CENTER STREET	17,300	16,980
	1.42	2.21	0.79		2050 WEST IN PROVO	7,990	6,335
	2.21	4.84	2.63		NORTH INCORPORATED LIMITS PROVO	7,990	6,335
	4.84	6.44	1.60		JUNCTION SR 265 SOUTH INCORPORATED LIMITS OREM	6,000	5,265
	6.44	7.47	1.03		CENTER STREET OREM	7,620	7,345
	7.47	8.47	1.00		800 NORTH OREM SR 52	9,790	9,435
	8.47	10.26	1.79		JUNCTION SR 241 N. INC. LIMITS OREM & S. INC. LIMITS LINDON	12,170	11,730
	10.26	10.73	0.47		N. INC. LIMITS LINDON & S. INC. LIMITS PLEASANT GROVE - SR 89	12,170	11,730
A00115	**0.00**	**0.65**	**0.65**	*	**JUNCTION SR 6**	**10,820**	**10,430**
	0.65	0.77	0.12		NORTH INCORPORATED LIMITS PAYSON	8,525	8,215
	0.77	2.03	1.26		JUNCTION FAI 15	1,175	1,145
	2.03	3.71	1.68		NORTH URBAN BOUNDARY PAYSON	1,175	1,145
	3.71	5.87	2.16		JUNCTION SR 147 BENJAMIN VIA 3200 WEST	585	560
	5.87	6.22	0.35		1400 WEST STREET VIA 7300 SOUTH	1,115	1,075

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	6.22	7.80	1.58		WEST URBAN BOUNDARY	1,565	1,565
	7.80	8.27	0.47		WEST INCORPORATED LIMITS SPANISH FORK - SR 156	1,500	1,585
A00116	**0.00**	**0.18**	**0.18**	*	**JUNCTION SR 132**	**2,625**	**2,595**
	0.18	6.50	6.32		EAST INCORPORATED LIMITS MORONI	2,895	2,860
	6.50	7.04	0.54		WEST INC. LIMITS MOUNT PLEASANT - JUNCTION SR 89	2,970	2,935
A00117	**0.00**	**0.83**	**0.83**	*	**JUNCTION LOCAL ROAD AT 200 WEST IN WALES**	**220**	**255**
	0.83	4.90	4.07		SOUTH INCORPORATED LIMITS WALES	610	625
	4.90	7.13	2.23		JUNCTION SR 132	650	675
	7.13	8.28	1.15		JUNCTION SR 89	735	690
	8.28	9.18	0.90		WEST INCORPORATED LIMITS SPRING CITY	750	665
	9.18	12.17	2.99		NORTH INCORPORATED LIMITS SPRING CITY - JUNCTION SR 89	1,325	995
A00118	**0.00**	**0.50**	**0.50**	*	**JUNCTION FAI 70**	**805**	**755**
	0.50	0.86	0.36		JUNCTION CENTER STREET IN JOSEPH	550	455
	0.86	5.37	4.51		EAST INCORPORATED LIMITS JOSEPH	620	585
	5.37	6.72	1.35		WEST INCORPORATED LIMITS MONROE	2,685	2,530
	6.72	10.09	3.37		NORTH INCORPORATED LIMITS MONROE	2,770	2,610
	10.09	12.61	2.52		JUNCTION SR 258	3,870	3,650
	12.61	14.74	2.13		SOUTH URBAN BOUNDARY	3,780	3,680
	14.75	15.12	0.38		JUNCTION SR 120	6,785	6,540
	15.12	15.54	0.42		400 EAST VIA 300 NORTH RICHFIELD	5,835	6,180
	15.54	15.71	0.17		JUNCTION SR 119	4,075	3,970
	15.71	21.38	5.67		EAST URBAN BOUNDARY RICHFIELD	4,075	3,970
	21.38	23.57	2.19		JUNCTION LOCAL ROAD	4,170	4,390
	23.57	24.08	0.51		SOUTHWEST INCORPORATED LIMITS SIGURD - JUNCTION SR 24	4,170	4,390
A00119	**0.00**	**0.16**	**0.16**	*	**JUNCTION SR 118 EAST INCORPORATED LIMITS RICHFIELD**	**2,485**	**2,420**
	0.16	4.14	3.98		EAST URBAN BOUNDARY RICHFIELD	2,300	2,165

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	4.14	8.80	4.66		JUNCTION LOCAL ROAD TO GLENWOOD - JUNCTION SR 24	1,175	1,105
A00120	**0.00**	**1.02**	**1.02**	*	**JUNCTION FAI 70 (SOUTH RICHFIELD INTERCHANGE)**	**4,120**	**4,040**
A00120	1.02	2.32	1.30		JUNCTION SR 118	12,250	12,020
	2.32	2.61	0.29		CENTER STREET VIA MAIN STREET	13,100	12,855
	2.61	3.34	0.73		JUNCTION SR 118 300 NORTH IN RICHFIELD	5,125	5,030
	3.34	3.90	0.56		NORTH INCORPORATED LIMITS RICHFIELD - JUNCTION FAI 70	3,570	3,500
A00121	**0.00**	**2.68**	**2.68**	*	**JUNCTION SR 40**	**3,650**	**2,240**
	2.68	4.95	2.27		NORTHWEST INCORPORATED LIMITS ROOSEVELT	3,900	3,390
	4.95	9.97	5.02		LOCAL ROAD TO CEDARVIEW	1,720	1,620
	9.97	12.77	2.80		NEOLA	870	970
	12.77	17.43	4.66		DUCHESNE - UINTAH COUNTY LINE	410	500
	17.43	23.73	6.30		JUNCTION LOCAL ROAD TO BALLARD	635	775
	23.73	37.64	13.91		LA POINT	1,140	1,255
	37.64	38.66	1.02		MAESER WEST URBAN BOUNDARY VERNAL	2,700	2,600
	38.66	40.13	1.47		WEST INCORPORATED LIMITS VERNAL - SR 40 IN VERNAL	5,995	5,780
A00122	**0.00**	**0.45**	**0.45**	*	**HIAWATHA (RR XING)**	**665**	**625**
	0.45	8.79	8.34		EAST INCORPORATED LIMITS HIAWATHA - JUNCTION SR 10	1,455	1,370
A00123	**0.00**	**7.12**	**7.12**	*	**JUNCTION SR 6**	**3,715**	**3,500**
	7.12	8.72	1.60		WEST INCORPORATED LIMITS EAST CARBON CITY	4,225	3,985
	8.72	9.59	0.87		JUNCTION SR 124	3,775	3,775
	9.59	10.84	1.25		E. INC. LIMITS EAST CARBON CITY & W. INC. LIMITS SUNNYSIDE	1,475	1,570
	10.84	11.46	0.62		NORTH INC. LIMITS SUNNYSIDE - ENTER SUNNYSIDE MINE	500	625
A00124	**0.00**	**2.47**	**2.47**	*	**GENEVA COAL MINE**	**280**	**350**
	2.47	5.42	2.95		CARBON - EMERY COUNTY LINE	280	350
	5.42	7.96	2.54		SOUTH INC. LIMITS EAST CARBON CITY - JUNCTION SR 123	400	505
A00125	**0.00**	**7.43**	**7.43**	*	**JUNCTION SR 50**	**1,115**	**1,100**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	7.43	9.19	1.76		JUNCTION LOCAL ROAD	1,115	1,100
	9.19	10.12	0.93		SOUTH INCORPORATED LIMITS OAK CITY	685	645
A00125	10.12	21.54	11.42		NORTH INCORPORATED LIMITS OAK CITY	240	225
	21.54	22.15	0.61		SOUTH INCORPORATED LIMITS LEAMINGTON - JUNCTION SR 132	220	205
A00126	**0.00**	**0.49**	**0.49**	*	**JUNCTION FAI 15**	**17,745**	**17,745**
	0.49	1.58	1.09		GENTILE STREET IN LAYTON SR 109	20,695	20,695
	1.58	3.20	1.62		JUNCTION SR 232 HILLFIELD ROAD	20,105	20,105
	3.20	3.39	0.19		JUNCTION SR 108 SYRACUSE ROAD	19,125	19,125
	3.39	4.45	1.06		NORTH INC. LIMITS LAYTON& SOUTH INC. LIMITS CLEARFIELD	18,150	18,150
	4.45	5.64	1.19		JUNCTION SR 193 700 SOUTH STREET	25,805	25,425
	5.64	5.98	0.34		JUNCTION SR 107 300 NORTH STREET	25,990	25,055
	5.98	6.14	0.16		JUNCTION SR 103	25,990	25,055
	6.14	7.13	0.99		NORTH INC. LIMITS CLEARFIELD & SOUTH INC. LIMITS SUNSET	21,360	20,590
	7.13	8.02	0.89		JUNCTION SR 37 IN SUNSET	26,920	25,950
	8.02	8.65	0.63		DAVIS-WEBER COUNTY LINE INC. LIMITS SUNSET& S. INC. LM ROY	26,920	25,950
	8.65	9.04	0.39		5600 SOUTH SR 97 IN ROY	32,810	31,630
	9.04	10.15	1.11		RIVERDALE ROAD SR 26	23,990	23,125
	10.15	10.65	0.50		4400 SOUTH STREET FAU 2022 IN ROY	24,890	23,995
	10.65	11.13	0.48		4000 SOUTH STREET FAU 2030	24,890	23,995
	11.13	11.32	0.19		JUNCTION SR 79	12,575	12,120
	11.32	11.65	0.33		NORTH INCORPORATED LIMITS ROY	12,575	12,120
	11.65	13.27	1.62		JUNCTION SR 108	12,795	12,335
	13.27	14.36	1.09		JUNCTION SR 104 WILSON LANE	14,455	14,290
	14.36	18.64	4.28		JUNCTION SR 39 1200 SOUTH STREET	7,580	7,305
	18.64	20.75	2.11		JUNCTION SR 134 EAST OF PLAIN CITY	4,190	4,040

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	20.75	21.08	0.33		WEBER - BOX ELDER COUNTY LINE	4,135	3,900
	21.08	21.49	0.41		JUNCTION FAI 15 - SR 89	6,490	6,120
A00127	**0.00**	**0.97**	**0.97**	*	**JUNCTION SR 110**	**1,555**	**2,250**
A00127	0.97	1.04	0.07		SOUTHWEST URBAN BOUNDARY	1,430	2,250
	1.04	1.72	0.68		WEST INCORPORATED LIMITS SYRACUSE	1,430	2,250
	1.72	2.01	0.29		JUNCTION BLUFF ROAD	2,260	2,830
	2.01	2.51	0.50		2500 WEST STREET - JUNCTION SR 108 SYRACUSE	3,100	3,410
A00128	**0.00**	**15.59**	**15.59**	*	**JUNCTION SR 191 NORTH OF MOAB**	**695**	**655**
	15.59	44.73	29.14		LOCAL ROAD TO CASTLE VALLEY - JUNCTION FAI 70	595	560
A00130	**0.00**	**0.21**	**0.21**	*	**JUNCTION FAI 15**	**5,600**	**4,635**
	0.21	1.74	1.53		SOUTH INCORPORATED LIMITS OF CEDAR CITY	10,740	9,765
	1.74	2.22	0.48		400 SOUTH IN CEDAR CITY	26,875	22,695
	2.22	2.47	0.25		JUNCTION SR 14 IN CEDAR CITY	23,250	21,350
	2.47	2.95	0.48		JUNCTION SR 56 IN CEDAR CITY	19,820	19,820
	2.95	5.31	2.36		600 NORTH IN CEDAR CITY	13,425	16,880
	5.31	5.53	0.22		NORTH CEDAR CITY INTERCHANGE	6,045	9,315
	5.53	8.37	2.84		NORTH INCORPORATED LIMITS CEDAR CITY	3,405	3,280
	8.37	18.88	10.51		JUNCTION LOCAL ROAD WEST OF ENOCH	835	1,275
	18.88	36.64	17.76		JUNCTION LOCAL ROAD TO PAROWAN GAP	850	900
	36.64	41.48	4.84		IRON - BEAVER COUNTY LINE	820	820
	41.48	42.08	0.60		SOUTH INCORPORATED LIMITS MINERSVILLE	860	860
	42.08	42.24	0.16		NORTH INCORPORATED LIMITS MINERSVILLE - JUNCTION SR 21	775	775
A00131	**0.00**	**0.24**	**0.24**	*	**JUNCTION FAI 15**	**14,055**	**13,550**
	0.24	0.58	0.34		500 WEST BOUNTIFUL - 200 WEST	16,995	16,385
A00132	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 6**	**1,465**	**1,330**
	0.50	3.77	3.27		NORTHEAST INCORPORATED LIMITS LYNNDYL	1,615	1,420

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	3.77	5.37	1.60		WEST INCORPORATED LIMITS LEAMINGTON	1,545	1,350
	5.37	5.55	0.18		JUNCTION SR 125 IN LEAMINGTON	1,250	1,155
	5.55	8.67	3.12		EAST INCORPORATED LIMITS LEAMINGTON	1,255	1,225
A00132	8.67	20.02	11.35		MILLARD - JUAB COUNTY LINE	1,515	1,495
	20.02	31.82	11.80		JUNCTION LOCAL ROAD	1,515	1,495
	31.82	32.95	1.13		JUNCTION LOCAL ROAD	1,705	1,685
	32.95	33.33	0.38		WEST INCORPORATED LIMITS NEPHI	2,450	2,000
	33.33	34.39	1.06		JUNCTION SR 41 IN NEPHI	3,445	2,995
	34.39	34.89	0.50		JUNCTION FAI 15	3,795	3,345
	34.89	41.99	7.10		EAST INCORPORATED LIMITS NEPHI	2,525	2,025
	41.99	47.07	5.08		JUAB - SANPETE COUNTY LINE	2,355	1,860
	47.07	48.41	1.34		NORTH INCORPORATED LIMITS FOUNTAIN GREEN	2,800	2,100
	48.41	54.60	6.19		SOUTH INCORPORATED LIMITS FOUNTAIN GREEN	3,500	2,830
	54.60	56.01	1.41		NORTH INCORPORATED LIMITS MORONI	3,300	2,600
	56.01	56.33	0.32		JUNCTION SR 116 IN MORONI	2,995	2,400
	56.33	59.51	3.18		SOUTH INCORPORATED LIMITS MORONI	3,100	2,580
	59.51	63.37	3.86		JUNCTION SR 117 AT CHESTER - JUNCTION SR 89	2,885	2,400
A00133	**0.00**	**1.21**	**1.21**	*	**SOUTH INCORPORATED LIMITS KANOSH**	**845**	**795**
	1.21	6.26	5.05		NORTH INCORPORATED LIMITS KANOSH	1,025	965
	6.26	7.13	0.87		SOUTH INCORPORATED LIMITS MEADOW	1,235	1,255
	7.13	7.20	0.07		NORTH INCORPORATED LIMITS MEADOW - JUNCTION FAI 15	2,625	2,655
A00134	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 37**	**2,360**	**2,225**
	1.00	3.79	2.79		WEST HAVEN INCORPORATED LIMITS	2,360	2,225
	3.79	6.27	2.48		JUNCTION SR 39 12TH STREET	1,850	1,745
	6.27	9.06	2.79		SOUTH INCORPORATED LIMITS PLAIN CITY	2,325	2,190
	9.06	11.33	2.27		EAST INCORPORATED LIMITS PLAIN CITY	4,250	4,005

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	11.33	11.59	0.26		JUNCTION FAI 15	12,695	12,460
	11.59	12.38	0.79		WEST INCORPORATED LIMITS PLEASANT VIEW - SR 89	10,095	9,905
A00136	**0.00**	**3.46**	**3.46**	*	**JUNCTION SR 50 - JUNCTION SR 6 UNCONSTRUCTED**	**NA**	**NA**
A00137	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 89**	**1,600**	**1,510**
	0.62	6.50	5.88		EAST INCORPORATED LIMITS GUNNISON	1,045	985
	6.50	8.32	1.82		WEST INCORPORATED LIMITS MAYFIELD	920	865
	8.32	11.33	3.01		NORTH INCORPORATED LIMITS MAYFIELD - JUNCTION SR 89	345	325
A00138	**0.00**	**4.29**	**4.29**	*	**JUNCTION FAI 80 AT STANSBURY**	**1,075**	**1,740**
	4.29	7.32	3.03		JUNCTION LOCAL ROAD (OLD US 50A)	2,700	3,000
	7.32	12.14	4.82		NORTH INCORPORATED LIMITS GRANTSVILLE	4,450	4,440
	12.14	12.38	0.24		JUNCTION SR 112 IN GRANTSVILLE	2,710	2,555
	12.38	20.38	8.00		EAST INCORPORATED LIMITS GRANTSVILLE - JUNCTION SR 36	2,395	2,255
A00139	**0.00**	**1.41**	**1.41**	*	**JUNCTION SR 6 - SR 157 SOUTH OF HELPER**	**2,670**	**3,800**
A00140	**0.00**	**2.55**	**2.55**	*	**JUNCTION SR 68 AT BLUFFDALE - FAI 15**	**2,445**	**2,355**
A00141	**0.00**	**2.97**	**2.97**	*		**300**	**280**
		6.61	3.64			685	645
	0.00	**0.03**		*	**JUNCTION SR 23**		**595**
	0.03		4.45		NORTHWEST INCORPORATED LIMITS NEWTON		595
	4.48		0.48		SOUTH INCORPORATED LIMITS CLARKSTON		505
	4.96		0.41		CENTER STREET INCORPORATED LIMITS CLARKSTON		620
	5.37		4.07		EAST INCORPORATED LIMITS CLARKSTON		660
	9.44		0.27		WEST INCORPORATED LIMITS TRENTON		920
	9.71		2.36		JUNCTION SR 23 IN TRENTON		1,010
	12.07		2.03		EAST INCORPORATED LIMITS TRENTON		1,010
	14.10		1.24		WEST INCORPORATED LIMITS LEWISTON		1,010
	15.34		1.29		EAST INCORPORATED LIMITS LEWISTON		1,140

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	16.63	17.24	0.61		WEST INCORPORATED LIMITS RICHMOND - SR 91	1,475	1,390
A00143	**0.00**	**0.30**	**0.30**	*	**JUNCTION FAI 15**	**2,980**	**2,945**
	0.30	2.62	2.32		WEST INCORPORATED LIMITS PAROWAN	4,255	4,205
A00143	2.62	4.01	1.39		JUNCTION SR 274 IN PAROWAN	2,545	2,515
	4.01	13.40	9.39		SOUTH INCORPORATED LIMITS PAROWAN	1,700	1,680
	13.40	16.16	2.76		NORTH INCORPORATED LIMITS BRIANHEAD	1,700	1,680
	16.16	18.15	1.99		SOUTH INCORPORATED LIMITS BRIANHEAD	1,700	1,680
	18.15	19.05	0.90		NORTH ENTRANCE CEDAR BREAKS	1,700	1,680
	19.05	19.44	0.39		JUNCTION CEDAR BREAKS PARK ROAD	875	825
	19.44	27.48	8.04		EAST ENTRANCE CEDAR BREAKS	875	825
	27.48	32.15	4.67		IRON - GARFIELD COUNTY LINE	875	825
	32.15	50.20	18.05		PANGUITCH LAKE	785	740
	50.20	50.79	0.59		SOUTH INCORPORATED LIMITS PANGUITCH - SR 89	1,120	1,055
A00144	**0.00**	**2.37**	**2.37**	*	**JCT. SR 92 AMERICAN FORK CANYON - TIBBLE FORK RESEVIOR**	**210**	**200**
A00145	**0.00**	**0.49**	**0.49**	*	**JCT. FAI 15- SR 89 WEST INC. LIMITS AMERICAN FORK VIA MAIN**	**9,645**	**9,295**
A00146	**0.00**	**0.22**	**0.22**	*	**JUNCTION SR 89**	**9,175**	**6,900**
	0.22	0.76	0.54		200 SOUTH VIA 100 EAST	11,935	8,250
	0.76	2.42	1.66		500 NORTH VIA 100 EAST PLEASANT GROVE	5,850	5,860
	2.42	5.03	2.61		NORTH INCORPORATED LIMITS PLEASANT GROVE	4,460	4,780
	5.03	5.28	0.25		SOUTH INCORPORATED LIMITS HIGHLAND - JUNCTION SR 92	4,460	4,780
A00147	**0.00**	**1.86**	**1.86**	*	**JUNCTION SR 6**	**2,295**	**2,210**
	1.86	2.32	0.46		WEST INCORPORATED LIMITS PAYSON	2,070	2,010
	2.32	2.91	0.59		WEST URBAN BOUNDARY PAYSON	2,180	2,055
	2.91	6.95	4.04		5600 WEST SR 141 PAYSON	1,220	1,150
	6.95	9.86	2.91		7300 SOUTH VIA 5600 WEST	1,315	1,240
	9.86	11.00	1.14		3200 WEST SR 115 VIA 7300 SOUTH	1,470	1,470

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	11.00	13.97	2.97		6400 SOUTH SR 77 VIA 3200 WEST	1,375	1,735
	13.97	14.28	0.31		WEST URBAN BOUNDARY	1,210	1,735
	14.28	14.48	0.20		JUNCTION FAI 15	1,580	2,700
A00147	14.48	15.02	0.54		WEST INCORPORATED LIMITS SPANISH FORK	1,580	2,700
	15.02	16.05	1.03		JUNCTION SR 156 MAIN STREET IN SPANISH FORK	2,900	3,555
	16.05	17.97	1.92		JUNCTION SR 214 EAST INCORPORATED LIMITS SPANISH FORK	2,300	2,870
	17.97	18.06	0.09		WEST INCORPORATED LIMITS MAPLETON	2,300	2,870
	18.06	19.07	1.01		JUNCTION SR 89	1,200	1,320
	19.07	20.08	1.01		MAIN STREET VIA MAPLETON ROAD	1,135	1,135
	20.08	21.08	1.00		JUNCTION LOCAL ROAD CENTER OF MAPLETON - SR 89	2,555	2,555
A00148	**0.00**	**2.52**	**2.52**	*	**JCT. SR 14 - S. CEDAR BREAKS NAT. MONUMENT BOUNDARY**	**625**	**615**
A00149	**0.00**	**4.22**	**4.22**	*	**JCT. SR 40 IN JENSEN - DINOSAUR NATIONAL MONUMENT**	**2,025**	**1,910**
A00150	**0.00**	**1.06**	**1.06**	*	**JUNCTION SR 32**	**1,910**	**1,800**
	1.06	4.87	3.81		EAST INCORPORATED LIMITS KAMAS	1,000	940
	4.87	29.25	24.38		WASATCH NATIONAL FOREST BOUNDARY	1,015	955
	29.25	34.12	4.87		SUMMIT- SUMMIT COUNTY LINE	580	545
	34.12	54.54	20.42		DUCHESNE-SUMMIT COUNTY LINE- UTAH-WYOMING STATE LINE	440	415
A00151	**0.00**	**0.50**	**0.50**	*	**JUNCTION REDWOOD ROAD VIA 10400 SOUTH**	**19,865**	**19,150**
	0.50	2.24	1.74		JUNCTION 1300 WEST - FAI 15 VIA 10600 SOUTH	24,715	23,440
A00152	**0.00**	**0.72**	**0.72**	*	**JUNCTION 900 EAST**	**17,750**	**17,400**
	0.72	1.45	0.73		1300 EAST VIA VAN WINKLE EXPRESSWAY	17,020	16,705
	1.45	2.27	0.82		5600 SOUTH	23,055	22,625
	2.27	2.42	0.15		6100 SOUTH 1 WAY SOUTHBOUND HIGHLAND DRIVE	19,755	19,390
	2.42	2.52	0.10		HIGHLAND DRIVE NORTHBOUND (1 WAY TRAVEL ONLY)	31,785	31,195
	2.52	3.02	0.50		6200 SOUTH STREET - FAI 215 EASTBOUND ON & OFF RAMPS	43,025	42,230

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00153	**0.00**	**1.11**	**1.11**	*	**JUNCTION SR 160 IN BEAVER**	**4,000**	**3,770**
	1.11	4.53	3.42		EAST INCORPORATED LIMITS BEAVER	1,990	1,875
	4.53	26.86	22.33		FISHLAKE NATIONAL FOREST BOUNDARY	45	45
	26.86	37.85	10.99		BEAVER - PIUTE COUNTY LINE	110	100
A00153	37.85	40.47	2.62		WEST INCORPORATED LIMITS JUNCTION - SR 89	160	150
A00154	**0.00**	**10.10**	**10.10**	*	**PROPOSED JUNCTION FAI 15**	**NA**	**NA**
	10.10	11.59	1.49		BEGIN CONSTRUCTION 9000 SOUTH	14,250	13,495
	11.59	12.59	1.00		JUNCTION 7800 SOUTH (SR 48)	22,665	19,845
	12.59	13.60	1.01		7000 SOUTH VIA BANGERTER HIGHWAY	28,300	24,750
	13.60	14.63	1.03		6200 SOUTH	29,960	26,040
	14.63	15.63	1.00		5400 SOUTH (SR 173)	30,500	27,330
	15.63	16.64	1.01		JUNCTION 4700 SOUTH VIA BANGERTER HIGHWAY	39,425	38,280
	16.64	17.64	1.00		JUNCTION 4100 SOUTH STREET	40,375	39,500
	17.64	18.15	0.51		JUNCTION 3500 SOUTH (SR 171)	46,695	44,570
	18.15	18.69	0.54		JUNCTION 3100 SOUTH	46,695	44,570
	18.69	19.48	0.79		JUNCTION 2700 SOUTH VIA BANGERTER HIGHWAY	39,715	37,590
	19.48	19.53	0.05		URBAN BOUNDARY	39,715	37,590
	19.53	19.73	0.20		SOUTH FRONTAGE ROAD 2400 SOUTH	39,715	37,590
	19.73	20.08	0.35		JUNCTION 2100 SOUTH INTERCHANGE	34,000	32,200
	20.08	21.93	1.85		JUNCTION 1820 SOUTH VIA 4000 WEST	34,000	32,200
	21.93	23.05	1.12		FAI 80 EASTBOUND OFF RAMP - WESTBOUND OFF RAMP	13,715	12,980
A00155	**0.00**	**3.65**	**3.65**	*	**JUNCTION SR 10**	**1,180**	**1,110**
	3.65	4.95	1.30		WEST INCORPORATED LIMITS CLEVELAND	1,270	1,195
	4.95	8.41	3.46		NORTH INC. LIMITS CLEVELAND (JUNCTION LOCAL ROAD)	1,330	1,280
	8.41	10.73	2.32		JUNCTION LOCAL ROAD EAST OF ELMO - SR 10	940	885
A00156	**0.00**	**0.17**	**0.17**	*	**JUNCTION SR 6**	**22,520**	**21,710**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.17	0.63	0.46		JUNCTION SR 115 VIA MAIN STREET SPANISH FORK	23,150	23,345
	0.63	0.98	0.35		400 NORTH SR 147 VIA MAIN STREET	29,295	28,240
	0.98	1.38	0.40		800 NORTH STREET - FAI 15 IN SPANISH FORK	22,925	22,100
A00157	**0.00**	**0.40**	**0.40**	*	**JUNCTION SR 244**	**2,150**	**2,510**
A00157	0.40	1.25	0.85		SOUTH INCORPORATED LIMITS HELPER	2,150	2,510
	1.25	5.02	3.77		JUNCTION SR 139 - KENILWORTH	555	555
A00158	**0.00**	**3.77**	**3.77**	*	**JUNCTION SR 39**	**2,420**	**2,280**
	3.77	4.33	0.56		JUNCTION LOCAL ROAD WEST OF EDEN	1,705	1,605
	4.33	4.98	0.65		JUNCTION LOCAL ROAD NORTHWEST OF EDEN	1,145	1,080
	4.98	11.67	6.69		PATIO SPRINGS - POWDER MOUNTAIN SKI RESORT	1,235	1,165
A00159	**0.00**	**8.01**	**8.01**	*	**JUNCTION SR 21 GARRISON - SR 6**	**100**	**95**
A00160	**0.00**	**1.35**	**1.35**	*	**JUNCTION FAI 15**	**2,810**	**3,075**
	1.35	2.02	0.67		SOUTH INCORPORATED LIMITS BEAVER	6,900	6,820
	2.02	2.21	0.19		JUNCTION SR 21 IN BEAVER	7,205	7,120
	2.21	3.02	0.81		JUNCTION SR 153 IN BEAVER	3,950	3,905
	3.02	3.62	0.60		JUNCTION LOCAL ROAD TO MANDERFIELD	2,900	2,865
	3.62	3.83	0.21		NORTH INCORPORATED LIMITS BEAVER - JUNCTION FAI 15	2,900	2,865
A00161	**0.00**	**1.08**	**1.08**	*	**JUNCTION FAI 70**	**145**	**135**
	1.08	3.09	2.01		COVE FORT - FAI 15 NORTH COVE FORT INTERCHANGE	90	90
A00163	**0.00**	**19.35**	**19.35**	*	**ARIZONA - UTAH STATE LINE**	**1,695**	**1,595**
	19.35	21.54	2.19		JUNCTION LOCAL ROAD SOUTH OF MEXICAN HAT	2,115	1,995
	21.54	24.98	3.44		MEXICAN HAT	825	780
	24.98	41.60	16.62		JUNCTION SR 261	825	780
	41.61	43.37	1.77		JUNCTION SR 191 AT BLUFF	555	425
	43.37	54.51	11.14		ST. CHRISTOPHERS MISSION	555	425
	54.51	56.21	1.70		JUNCTION LOCAL ROAD - SR 262	850	655

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00164	**0.00**	**1.55**	**1.55**	*	**JUNCTION FAI 15**	**2,460**	**2,990**
	1.55	1.66	0.11		SOUTH URBAN BOUNDARY	2,460	2,990
	1.66	2.73	1.07		JUNCTION LOCAL ROAD VIA 800 SOUTH - SR 6	3,050	2,970
A00165	**0.00**	**1.01**	**1.01**	*	**CENTER OF PARADISE AT 9100 SOUTH**	**2,245**	**2,115**
A00165	1.01	4.37	3.36		NORTH INCORPORATED LIMITS PARADISE	2,130	1,995
	4.37	4.98	0.61		SOUTH INCORPORATED LIMITS HYRUM	2,610	2,530
	4.98	5.70	0.72		JUNCTION SR 101 IN HYRUM	6,310	5,950
	5.70	6.50	0.80		NORTH INCORPORATED LIMITS HYRUM	7,625	6,100
	6.50	7.52	1.02		SOUTH INCORPORATED LIMITS NIBLEY	9,300	7,705
	7.52	7.90	0.38		LOGAN URBAN BOUNDARY	9,300	7,705
	7.90	8.69	0.79		JUNCTION SR 238 IN NIBLEY	10,995	8,905
	8.69	9.70	1.01		NORTH INCORPORATED LIMITS NIBLEY	7,635	6,755
	9.70	10.22	0.52		SOUTH INCORPORATED LIMITS PROVIDENCE	7,635	6,755
	10.22	10.40	0.18		NORTH INCORPORATED LIMITS PROVIDENCE	7,635	6,755
	10.40	10.73	0.33		LOGAN SOUTH INCORPORATED LIMITS - SR 91 LOGAN	10,835	9,590
A00167	**0.00**	**1.54**	**1.54**	*	**JUNCTION FAI 84**	**3,240**	**3,055**
	1.54	6.91	5.37		JUNCTION LOCAL ROAD	2,655	2,500
	6.91	11.07	4.16		MORGAN - WEBER COUNTY LINE - SR 39 NEAR HUNTSVILLE	2,655	2,500
A00168	**0.00**	**1.16**	**1.16**	*	**NORTH ENTRANCE HILL AIR FORCE BASE - JUNCTION SR 60**	**10,410**	**10,145**
A00171	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 111 IN MAGNA**	**12,745**	**12,100**
	1.50	3.50	2.00		7200 WEST WEST INCORPORATED LIMITS WEST VALLEY	18,895	17,940
	3.50	4.50	1.00		5600 WEST	20,400	20,020
	4.50	5.50	1.00		4800 WEST STREET VIA 3500 SOUTH	25,205	24,735
	5.50	5.80	0.30		4000 WEST STREET	39,860	39,120
	5.80	6.00	0.20		BANGERTER HIGHWAY	40,990	40,230
	6.00	6.50	0.50		3600 WEST STREET VIA 3500 SOUTH	34,300	33,695

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	6.50	7.00	0.50		3200 WEST	38,740	38,020
	7.00	7.32	0.32		2700 WEST STREET VIA 3500 SOUTH STREET	46,060	45,205
	7.32	8.01	0.69		JUNCTION FAI 215	44,750	43,920
	8.01	8.80	0.79		REDWOOD ROAD VIA 3500 SOUTH	41,625	41,625
A00171	8.80	9.20	0.40		JORDAN RIVER BRIDGE EAST INC. LIMITS WEST VALLEY	41,625	41,625
	9.20	9.99	0.79		900 WEST STREET FAU 1013	35,520	35,600
	9.99	10.11	0.12		JUNCTION FAI 15 VIA 3500 SOUTH	42,170	41,390
	10.11	10.69	0.58		300 WEST FAU 1017	43,245	42,445
	10.69	11.30	0.61		STATE STREET VIA 3300 SOUTH	32,180	31,585
	11.30	11.60	0.30		500 EAST	25,155	26,760
	11.60	11.90	0.30		700 EAST SR 71 VIA 3300 SOUTH	21,090	23,175
	11.90	12.50	0.60		900 EAST STREET	20,650	23,605
	12.50	12.68	0.18		1300 EAST STREET	16,490	17,180
	12.68	13.55	0.87		HIGHLAND DRIVE	16,245	16,245
	13.55	14.05	0.50		2000 EAST STREET	16,435	16,130
	14.05	14.55	0.50		2300 EAST STREET	17,075	16,760
	14.55	15.62	1.07		2700 EAST STREET - FAI 215	20,550	20,170
A00172	**0.00**	**0.99**	**0.99**	*	**6200 SOUTH VIA 5600 WEST**	**8,715**	**8,550**
	0.99	1.99	1.00		5400 SOUTH	12,620	15,750
	1.99	2.99	1.00		4700 SOUTH	15,900	18,760
	2.99	3.99	1.00		4100 SOUTH	16,500	17,535
	3.99	6.00	2.01		3500 SOUTH VIA 5600 WEST	17,180	22,900
	6.00	6.99	0.99		2100 SOUTH	14,000	15,500
	6.99	9.20	2.21		1300 SOUTH - FAI 80	14,000	15,000
A00173	**0.00**	**2.13**	**2.13**	*	**JUNCTION SR 111 NEAR BACCHUS**	**11,230**	**10,825**
	2.13	2.62	0.49		EAST INCORPORATED LIMITS WEST VALLEY CITY	11,230	10,825

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.62	4.59	1.97		5600 WEST VIA 5400 SOUTH	26,610	25,655
	4.59	4.89	0.30		4000 WEST STREET	31,810	30,665
	4.89	6.11	1.22		BANGERTER HIGHWAY	34,900	33,090
	6.11	7.11	1.00		2700 WEST VIA 5600 SOUTH STREET	37,900	35,090
A00173	7.11	7.92	0.81		REDWOOD ROAD SR 68	25,615	22,445
	7.92	8.61	0.69		MURRAY WEST INCORPORATED LIMITS	25,615	22,445
	8.61	9.08	0.47		700 WEST FAU 1015 IN MURRAY	28,515	25,460
	9.08	9.77	0.69		JUNCTION FAI 15 - STATE STREET SR 89	24,850	22,995
A00174	**0.00**	**8.15**	**8.15**	*	**INTERMOUNTAIN POWER PLANT MAIN ENTRANCE - JCT. SR 6**	**1,015**	**955**
A00180	**0.00**	**0.49**	**0.49**	*	**JUNCTION FAI 15**	**18,750**	**17,050**
	0.49	1.00	0.51		SOUTH INC. LIMITS AMERICAN FORK - SR 89 VIA 500 EAST	18,750	17,050
A00181	**0.00**	**0.45**	**0.45**	*	**JUNCTION VAN WINKLE EXPRESSWAY**	**17,305**	**15,995**
	0.45	1.04	0.59		4800 SOUTH STREET	15,530	14,970
	1.04	1.92	0.88		4500 SOUTH VIA 1300 EAST STREET	15,530	14,970
	1.92	2.80	0.88		3900 SOUTH	15,950	15,375
	2.80	3.26	0.46		3300 SOUTH VIA 1300 EAST STREET	18,660	17,990
	3.26	3.56	0.30		SOUTH INCORPORATED LIMITS SALT LAKE	18,660	17,990
	3.56	3.73	0.17		JUNCTION HIGHLAND DRIVE	32,590	32,270
	3.73	4.21	0.48		2700 SOUTH VIA 1300 EAST STREET	27,980	27,980
	4.21	4.60	0.39		JUNCTION FAI 80	42,550	44,075
	4.60	5.16	0.56		2100 SOUTH VIA 1300 EAST & SOUTH INC. LIMITS SALT LAKE CITY	21,355	22,470
	5.16	5.72	0.56		1700 SOUTH	19,885	21,615
	5.72	6.43	0.71		1300 SOUTH VIA 1300 EAST STREET	19,440	22,585
	6.43	6.87	0.44		800 SOUTH - 500 SOUTH VIA 1300 EAST	17,950	21,115
A00184	**0.00**	**0.14**	**0.14**	*	**NORTH TEMPLE**	**14,580**	**14,055**
	0.14	0.45	0.31		200 NORTH STREET VIA STATE STREET	13,235	12,760

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.45	0.72	0.27		MAIN STREET VIA 200 NORTH SALT LAKE CITY	19,930	19,215
	0.72	1.93	1.21		500 NORTH VIA COLUMBUS - SR 89 VIA VICTORY	16,730	16,130
A00186	**0.00**	**1.18**	**1.18**	*	**BEGIN SR 186 AT JUNCTION FAI 80**	**23,045**	**22,785**
	1.18	1.49	0.31		2400 WEST STREET	23,045	22,785
A00186	1.49	1.71	0.22		2200 WEST STREET	33,300	32,175
	1.71	2.23	0.52		JUNCTION FAI 215 VIA NORTH TEMPLE	33,300	32,175
	2.23	3.41	1.18		REDWOOD ROAD VIA NORTH TEMPLE	25,090	23,775
	3.41	4.30	0.89		900 WEST STREET	28,980	27,940
	4.30	5.04	0.74		300 WEST STREET VIA NORTH TEMPLE IN SALT LAKE CITY	29,585	28,520
	5.04	5.50	0.46		400 SOUTH STREET VIA 300 WEST	20,320	19,590
	5.50	5.65	0.15		MAIN STREET VIA 400 SOUTH STREET	25,770	25,315
	5.65	6.55	0.90		STATE STREET	28,550	28,025
	6.55	6.85	0.30		700 EAST VIA 400 SOUTH STREET	33,025	32,415
	6.85	7.55	0.70		900 EAST VIA 400 SOUTH STREET	37,060	36,375
	7.55	8.00	0.45		1300 EAST STREET	42,635	41,845
	8.00	8.50	0.50		GUARDSMAN WAY VIA 500 SOUTH	32,725	32,120
	8.50	9.03	0.53		WASATCH BOULEVARD	35,550	34,990
	9.03	9.36	0.33		SUNNYSIDE AVENUE	46,475	45,910
	9.36	9.70	0.34		2100 EAST STREET VIA FOOTHILL BOULEVARD	45,810	45,265
	9.70	9.93	0.23		FOOTHILL VILLAGE	45,465	44,625
	9.93	12.40	2.47		2300 EAST ST - FAI 215	39,590	38,855
A00189	**0.00**	**1.49**	**1.49**	*	**JUNCTION FAI 15**	**28,700**	**27,330**
	1.49	1.67	0.18		500 SOUTH	38,760	36,910
	1.67	1.95	0.28		300 SOUTH SR 89 IN PROVO	34,670	34,030
	1.95	2.41	0.46		CENTER STREET VIA UNIVERSITY AVENUE	44,175	44,175
	2.41	2.69	0.28		500 NORTH VIA UNIVERSITY AVENUE	44,645	44,645

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.69	2.95	0.26		800 NORTH FAU 3030 VIA UNIVERSITY AVENUE	39,820	39,820
	2.95	3.11	0.16		JUNCTION CANYON ROAD FAU 3051	39,390	39,235
	3.11	3.48	0.37		1230 NORTH FAU 3032 VIA UNIVERSITY AVENUE	35,400	35,100
	3.48	4.77	1.29		UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265	34,440	32,800
A00189	4.77	5.36	0.59		NORTH INCORPORATED LIMITS PROVO	33,520	30,630
	5.36	5.81	0.45		3700 NORTH PROVO	30,155	26,425
	5.81	6.04	0.23		NORTH INCORPORATED LIMITS PROVO	15,300	14,440
	6.04	7.48	1.44		SOUTH INCORPORATED LIMITS PROVO	15,300	14,440
	7.48	7.72	0.24		JUNCTION SR 52 OLMSTEAD JUNCTION	10,155	9,860
	7.72	9.19	1.47		NORTH INC. LIMITS PROVO & SOUTHEAST INC. LIMITS OREM	10,155	9,860
	9.19	11.17	1.98		EAST INCORPORATED LIMITS OREM & URBAN BOUNDARY	10,155	9,860
	11.17	14.30	3.13		BRIDAL VEIL FALLS	9,135	8,840
	14.30	14.57	0.27		JUNCTION SR 92	7,335	7,100
	14.57	21.05	6.48		UTAH - WASATCH COUNTY LINE	6,490	6,195
	21.05	24.93	3.88		JUNCTION LOCAL ROAD TO WALLSBURG	7,095	6,775
	24.93	25.17	0.24		SOUTHWEST INCORPORATED LIMITS CHARLESTON	7,095	6,775
	25.17	26.19	1.02		JUNCTION SR 113 IN CHARLESTON	5,545	5,295
	26.19	29.20	3.01		EAST INCORPORATED LIMITS CHARLESTON - JUNCTION SR 40	7,060	6,740
A00190	**0.00**	**1.83**	**1.83**	*	**JUNCTION FAI 215 AT KNUDSENS CORNER**	**26,310**	**25,820**
	1.83	2.46	0.63		JUNCTION SR 210	4,560	4,575
	2.46	4.92	2.46		SALT LAKE EAST URBAN BOUNDARY	4,350	4,370
	4.92	16.84	11.92		MULE HOLLOW INN	4,940	4,960
	16.84	19.93	3.09		BRIGHTON - SALT LAKE - WASATCH COUNTY LINE	205	205
A00191	**0.00**	**21.33**	**21.33**	*	**ARIZONA - UTAH STATE LINE**	**1,000**	**980**
	21.33	24.76	3.43		JUNCTION SR 163	1,845	1,810
	24.76	36.61	11.85		BLUFF	1,610	1,580

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	36.61	47.47	10.86	JUNCTION SR 262 TO ANETH	2,605	2,095
	47.47	50.13	2.66	JUNCTION SR 95 SOUTH OF BLANDING	3,620	3,555
	50.13	51.90	1.77	SOUTH INCORPORATED LIMITS BLANDING	5,640	5,545
	51.90	65.64	13.74	EAST INCORPORATED LIMITS BLANDING	2,400	2,360
A00191	65.64	70.97	5.33	VERDURE	2,350	2,310
	70.97	72.14	1.17	SOUTH INCORPORATED LIMITS MONTICELLO	4,085	3,935
	72.14	73.26	1.12	JUNCTION SR 666 IN MONTICELLO	3,385	3,250
	73.26	103.91	30.65	NORTH INCORPORATED LIMITS MONTICELLO	3,385	3,250
	103.91	119.44	15.53	JUNCTION SR 46 LA SAL JUNCTION	3,190	3,060
	119.44	125.26	5.82	SAN JUAN - GRAND COUNTY LINE	8,780	8,430
	125.26	127.43	2.17	SOUTH INCORPORATED LIMITS MOAB	15,965	15,405
	127.43	128.62	1.19	NORTH INCORPORATED LIMITS MOAB	5,530	5,340
	128.62	131.27	2.65	JUNCTION SR 128 COLORADO RIVER	4,990	4,815
	131.27	137.22	5.95	JUNCTION ARCHES NATIONAL MONUMENT ROAD	2,570	2,480
	137.22	157.71	20.49	JUNCTION SR 313 - JUNCTION FAI 70 CRESCENT JUNCTION	2,570	2,480
	157.72	158.03	0.32	* JUNCTION SR 6 NORTH OF HELPER	2,475	2,445
	158.03	166.53	8.50	ROAD TO POWER PLANT	370	400
	166.53	172.98	6.45	CARBON - DUCHESNE COUNTY LINE	370	400
	172.98	200.59	27.61	UINTAH NATIONAL FOREST BOUNDARY	370	400
	200.59	201.45	0.86	SOUTH INCORPORATED LIMITS DUCHESNE - SR 40 IN DUCHESNE	665	655
	201.46	202.50	1.05	* JUNCTION SR 40 IN VERNAL	3,355	3,660
	202.50	202.80	0.30	NORTH INCORPORATED LIMITS VERNAL	4,195	4,195
	202.80	207.03	4.23	NORTH URBAN BOUNDARY VERNAL	1,590	1,545
	207.03	218.59	11.56	JUNCTION SR 301 ROAD TO STEINAKER	1,455	1,410
	218.59	227.08	8.49	ASHLEY NATIONAL FOREST BOUNDARY	1,010	980
	227.08	236.20	9.12	UINTAH - DAGGETT COUNTY LINE	1,010	980

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	236.20	242.36	6.16		JUNCTION SR 44 GREENDALE JUNCTION	1,010	980
	242.36	244.91	2.55		FLAMING GORGE DAM	320	315
	244.91	249.25	4.34		DUTCH JOHN	320	315
	249.25	253.09	3.84		ASHLEY NATIONAL FOREST BNDRY - UT-WY STATE LINE	320	315
A00193	**0.00**	**0.58**	**0.58**	*	**JUNCTION SR 126**	**22,690**	**21,875**
	0.58	1.18	0.60		JUNCTION FAI 15 CLEARFIELD	19,060	16,400
	1.18	2.17	0.99		EAST INC. LIMITS CLEARFIELD & NORTH INC. LIMITS LAYTON	18,115	17,465
	2.17	5.58	3.41		HILLFIELD ROAD SR 232 - SR 89	18,660	18,660
A00195	**0.00**	**0.88**	**0.88**	*	**4500 SOUTH**	**13,990**	**15,410**
	0.88	1.76	0.88		3900 SOUTH VIA 2300 EAST	17,585	17,585
	1.76	2.56	0.80		3300 SOUTH - FAI 80 (2300 EAST INTERCHANGE)	17,200	16,580
A00197	**0.00**	**1.08**	**1.08**	*	**JUNCTION SR 73 MAIN STREET LEHI - SR 89 VIA 500 WEST**	**2,360**	**2,855**
A00198	**0.00**	**2.90**	**2.90**	*	**JUNCTION FAI 15 SANTAQUIN**	**6,425**	**NA**
	2.90	3.70	0.80		SOUTH URBAN BOUNDARY	5,000	NA
	3.70	5.40	1.70		SOUTH INCORPORATED LIMITS PAYSON	5,000	NA
	5.40	6.18	0.78		JUNCTION SR 115 IN PAYSON	6,550	NA
	6.18	7.37	1.19		EAST INCORPORATED LIMITS PAYSON	6,865	NA
	7.37	7.89	0.52		EAST URBAN BOUNDARY	6,865	NA
	7.89	9.12	1.23		WEST INCORPORATED LIMITS SALEM	6,865	NA
	9.12	10.45	1.33		NORTH INCORPORATED LIMITS SALEM	8,485	NA
	10.45	11.55	1.10		SOUTH URBAN BOUNDARY	15,560	NA
	11.55	12.36	0.81		SOUTH INCORPORATED LIMITS SPANISH FORK	16,600	NA
	12.36	13.73	1.37		300 SOUTH IN SPANISH FORK	6,435	NA
	13.73	15.77	2.04		EAST INCORPORATED LIMITS SPANISH FORK - JUNCTION SR 6	1,820	NA
A00199	**0.00**	**8.14**	**8.14**	*	**DUGWAY PROVING GROUNDS EAST GATE**	**675**	**705**
	8.14	17.40	9.26		TERRA	850	905

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	17.40	21.46	4.06		JUNCTION LOCAL ROAD	890	935
	21.46	22.16	0.70		LOCAL ROAD - JUNCTION SR 36	1,355	1,425
A00200	**0.00**	**1.56**	**1.56**	*	**JUNCTION SR 61 IN LEWISTON - UTAH - IDAHO STATE LINE**	**1,800**	**1,695**
A00201	**0.00**	**0.43**	**0.43**	*	**JUNCTION FAI 80**	**10,065**	**9,476**
A00201	0.43	1.87	1.44		TOOELE - SALT LAKE COUNTY LINE	10,065	9,476
	1.87	3.62	1.75		SMELTER OPERATION	10,065	9,476
	3.62	6.09	2.47		JUNCTION SR 202 GARFIELD	11,790	11,255
	6.09	7.56	1.47		SALT LAKE URBAN BOUNDARY VIA 2100 SOUTH STREET	11,790	11,255
	7.56	9.07	1.51		JUNCTION SR 111 8400 WEST IN MAGNA	16,330	15,675
	9.07	11.19	2.12		WEST INCORPORATED LIMITS WEST VALLEY CITY (7200 WEST)	25,800	24,635
	11.19	13.21	2.02		JUNCTION SR 172 5600 WEST INTERCHANGE	38,835	37,085
	13.21	14.18	0.97		4000 WEST INTERCHANGE (BANGERTER HIGHWAY)	55,000	45,390
	14.18	15.06	0.88		3200 WEST INTERCHANGE	70,555	67,375
	15.06	15.72	0.66		JUNCTION FAI 215	71,565	68,790
	15.72	16.49	0.77		JUNCTION REDWOOD ROAD SR 68	72,615	69,715
	16.49	16.86	0.37		JORDAN RIVER BRIDGE E. BNDRY WEST VALLEY W. BNDRY S. S. L.	72,615	69,715
	16.86	17.32	0.46		JUNCTION 900 WEST	82,435	79,140
	17.32	17.53	0.21		EAST INC. LIMITS SOUTH SALT LAKE & W. INC. LIMITS SALT LAKE	82,435	79,140
	17.53	17.78	0.25		JUNCTION FAI 15 IN SALT LAKE CITY VIA 2100 SOUTH STREET	56,446	53,080
	17.78	18.37	0.59		300 WEST STREET - STATE STREET	35,730	34,445
A00202	**0.00**	**1.89**	**1.89**	*	**JUNCTION SR 201 - FAI 80 GARFIELD CUT OFF**	**1,365**	**1,365**
A00203	**0.00**	**1.13**	**1.13**	*	**JUNCTION SR 89**	**22,010**	**22,045**
	1.13	2.27	1.14		NORTH INC. LIMITS SOUTH OGDEN & SOUTH INC. LIMITS OGDEN	32,000	32,650
	2.27	3.05	0.78		COUNTRY HILL DRIVE VIA HARRISON BOULEVARD	33,260	34,645
	3.05	3.90	0.85		36TH STREET VIA HARRISON BOULEVARD	37,765	39,340
	3.90	4.76	0.86		30TH STREET VIA HARRISON BOULEVARD	38,885	40,930

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	4.76	5.34	0.58		24TH STREET VIA HARRISON BOULEVARD	29,905	30,515
	5.34	6.10	0.76		20TH STREET VIA HARRISON BOULEVARD - 12TH STREET	30,385	31,005
A00204	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 26 RIVERDALE ROAD**	**25,865**	**24,935**
	0.20	1.07	0.87		SOUTH INCORPORATED LIMITS OGDEN	29,565	28,500
A00204	1.07	2.08	1.01		31ST STREET IN OGDEN VIA WALL AVENUE	31,630	29,000
	2.08	2.66	0.58		24TH STREET IN OGDEN	31,630	29,000
	2.66	3.55	0.89		20TH STREET IN OGDEN	28,320	26,655
	3.55	4.58	1.03		JUNCTION SR 39 12TH STREET IN OGDEN	22,755	21,425
	4.58	5.10	0.52		2ND STREET VIA WALL AVENUE IN OGDEN	19,065	18,380
	5.10	5.39	0.29		NORTH INC. LIMITS OGDEN & S. INC. LIMITS HARRISVILLE - SR 89	19,065	18,380
A00208	**0.00**	**10.18**	**10.18**	*	**JUNCTION SR 40 - SR 35 TABIONA**	**220**	**205**
A00209	**0.00**	**5.35**	**5.35**	*	**JUNCTION SR 48 PROPOSED SR 209**	**NA**	**NA**
	5.35	6.70	1.35		JUNCTION SR 68 BEGIN CONSTRUCTED PORTION	27,225	26,720
	6.70	7.36	0.66		WEST INCORPORATED LIMITS SANDY	25,785	25,305
	7.36	7.85	0.49		JUNCTION FAI 15 VIA 9000 SOUTH	33,835	33,210
	7.85	8.84	0.99		JUNCTION STATE STREET	23,005	22,580
	8.84	9.64	0.80		700 EAST VIA 9000 SOUTH	12,430	12,200
	9.64	10.08	0.44		9400 SOUTH VIA BYPASS	36,550	35,875
	10.08	11.09	1.01		1300 EAST VIA 9400 SOUTH	26,440	24,280
	11.09	11.91	0.82		2000 EAST FAU 1049	19,585	16,105
	11.91	12.68	0.77		EAST INCORPORATED LIMITS SANDY	19,585	16,105
	12.68	13.23	0.55		GRANITE 3100 EAST	8,540	8,670
	13.23	14.46	1.23		WASATCH BOULEVARD - SR 210	3,105	3,225
A00210	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 190 7000 SOUTH**	**20,775**	**21,470**
	0.73	3.15	2.42		7800 SOUTH VIA WASATCH BOULEVARD	16,375	16,880
	3.15	3.86	0.71		NATIONAL FOREST BOUNDARY	6,645	6,900

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	3.86	12.09	8.23		JUNCTION SR 209 9400 SOUTH STREET URBAN BOUNDARY	5,745	5,970
	12.09	12.51	0.42		ALTA RESORT - ALBION BASIN LOOP	995	1,025
	12.51	13.61	1.10	*	SR 210 - JUNCTION SR 210 ALTA BYPASS ROAD	145	145
A00211	**0.00**	**19.05**	**19.05**	*	**DUGOUT RANCH - SR 191 NORTH OF MONTICELLO**	**190**	**180**
A00212	**0.00**	**1.29**	**1.29**	*	**JUNCTION FAI 15 - 300 EAST STREET IN WASHINGTON**	**13,880**	**13,780**
A00215	**0.00**	**1.16**	**1.16**	*	**JUNCTION SR 80 SPLIT**	**21,776**	**21,320**
	1.16	1.59	0.43		JUNCTION SR 186	59,423	52,246
	1.59	1.89	0.30		SR 80 SOUTHBOUND RAMP	72,566	68,415
	1.89	2.79	0.90		3300 SOUTH OVERPASS	58,840	56,040
	2.79	6.32	3.53		3900 SOUTH INTERCHANGE	48,885	46,780
	6.32	7.74	1.42		KNUDSEN CORNER INTERCHANGE	37,095	35,670
	7.74	9.04	1.30		2000 EAST INTERCHANGE	59,210	57,210
	9.04	9.44	0.40		UNION PARKWAY INTERCHANGE	87,610	85,060
	9.44	10.14	0.70		EAST INCORPORATED LIMITS MURRAY	87,610	85,060
	10.14	10.69	0.55		300 EAST NORTHBOUND EXIT	73,480	71,755
	10.69	11.55	0.86		STATE STREET EASTBOUND ENTRANCE	98,502	96,050
	11.55	13.20	1.65		JUNCTION FAI 15	92,595	90,415
	13.20	13.55	0.35		WEST INCORPORATED LIMITS MURRAY	92,595	90,415
	13.55	15.58	2.03		REDWOOD ROAD INTERCHANGE	80,785	78,880
	15.58	16.58	1.00		4700 SOUTH INTERCHANGE	88,540	85,965
	16.58	17.57	0.99		SOUTH INCORPORATED LIMITS WEST VALLEY CITY	88,540	85,965
	17.57	19.57	2.00		3500 SOUTH INTERCHANGE	80,750	77,865
	19.57	20.62	1.05		2100 SOUTH INTERCHANGE	47,884	46,360
	20.62	22.38	1.76		1300 SOUTH INTERCHANGE	53,350	51,440
	22.38	23.71	1.33		FAI 80 INTERCHANGE	45,465	43,840
	23.71	25.67	1.96		700 NORTH INTERCHANGE	34,695	33,040

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	25.67	27.02	1.35		2200 NORTH INTERCHANGE	37,025	34,525
	27.02	27.47	0.45		SALT LAKE - DAVIS COUNTY LINE	37,025	34,525
	27.47	29.02	1.55		JUNCTION SR 68 - FAI 15 NORTH SALT LAKE	36,450	33,990
A00218	**0.00**	**4.22**	**4.22**	*	**JUNCTION SR 23**	**1,715**	**1,660**
A00218	4.22	5.70	1.48		WEST INCORPORATED LIMITS AMALGA	1,715	1,660
	5.70	7.10	1.40		EAST INCORPORATED LIMITS AMALGA	3,665	3,550
	7.10	8.20	1.10		WEST INCORPORATED LIMITS SMITHFIELD - SR 91 SMITHFIELD	3,840	3,700
A00219	**0.00**	**1.67**	**1.67**	*	**WEST INCORPORATED LIMITS ENTERPRISE - SR 18**	**1,795**	**1,730**
A00224	**0.00**	**1.98**	**1.98**	*	**JUNCTION SR 113 IN MIDWAY**	**1,935**	**1,825**
	1.98	2.04	0.06		NORTH INCORPORATED LIMITS MIDWAY	1,935	1,825
	2.04	3.32	1.28		JUNCTION LOCAL ROAD - PINE CREEK CAMPGROUND	335	320
	3.33	6.81	3.49	*	WASATCH - SUMMIT COUNTY LINE	2,150	2,070
	6.81	7.67	0.86		SOUTH INCORPORATED LIMITS PARK CITY	7,685	7,245
	7.67	8.03	0.36		MARSAC AVENUE	7,685	7,245
	8.03	8.90	0.87		DEER VALLEY DRIVE	10,830	10,210
	8.90	9.04	0.14		SNOW COUNTRY ROAD	12,290	11,590
	9.04	9.35	0.31		PARK AVENUE	18,325	17,280
	9.35	9.98	0.63		JUNCTION SR 248 IN PARK CITY	19,985	19,755
	9.98	12.13	2.15		NORTH INCORPORATED LIMITS PARK CITY	16,335	16,150
	12.13	14.92	2.79		PARK WEST - FAI 80 KIMBALLS JUNCTION	11,255	11,125
A00225	**0.00**	**0.54**	**0.54**	*	**JUNCTION FAI 15 AT BURKE LANE**	**6,720**	**6,475**
	0.54	1.04	0.50		JUNCTION SR 89 - JUNCTION SR 106	6,770	6,525
A00226	**0.00**	**7.69**	**7.69**	*	**SNOW BASIN - SR 39 AT PINEVIEW RESERVOIR**	**170**	**160**
A00227	**0.00**	**0.42**	**0.42**	*	**JUNCTION FAI 15**	**4,685**	**4,685**
	0.42	1.13	0.71		SOUTH INCORPORATED LIMITS FARMINGTON - SR 106	4,685	4,685
A00228	**0.00**	**1.38**	**1.38**	*	**SOUTHBOUND RAMP FAI 15 - NORTH LEEDS INTERCHANGE**	**1,395**	**455**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00232	**0.00**	**0.14**	**0.14**	*	**JUNCTION SR 126**	**31,215**	**30,095**
	0.14	0.27	0.13		NORTH LAYTON INTERCHANGE	36,990	35,660
	0.27	1.27	1.00		GORDON AVENUE LAYTON	19,605	18,900
	1.27	2.26	0.99		JUNCTION SR 108 VIA HILL AIR FORCE BASE ROAD	20,205	19,480
A00232	2.26	2.42	0.16		JUNCTION SR 193 - HILL AIR FORCE BASE SOUTH GATE	17,995	17,535
A00235	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 89**	**16,500**	**15,905**
	0.50	1.01	0.51		JUNCTION 400 NORTH VIA WASHINGTON BOULEVARD	22,990	22,165
	1.01	1.23	0.22		LARSEN LANE	21,620	20,840
	1.23	1.80	0.57		JUNCTION 1100 NORTH	20,165	19,440
	1.80	2.04	0.24		NORTH INC. LIMITS OGDEN & SOUTH INC. LIMITS NORTH OGDEN	20,165	19,440
	2.04	3.07	1.03		JUNCTION 1700 NORTH IN NORTH OGDEN	19,740	19,030
	3.07	3.22	0.15		JUNCTION 2550 NORTH VIA WASHINGTON BOULEVARD	6,170	5,945
	3.22	3.66	0.44		WEST INC. LIMITS NORTH OGDEN VIA 2550 NORTH STREET	6,265	6,040
	3.66	3.73	0.07		W. INC. LIMITS NORTH OGDEN & E. INC. LIMITS PLEASANT VIEW	6,265	6,040
	3.73	4.86	1.13		PLEASANT VIEW - SR 89	6,265	6,040
A00237	**0.00**	**0.38**	**0.38**	*	**JUNCTION 700 NORTH VIA 800 EAST IN LOGAN**	**10,305**	**10,040**
	0.38	0.88	0.50		JUNCTION SR 288	8,695	8,695
	0.88	1.01	0.13		JUNCTION SR 239 1400 NORTH LOGAN	6,450	8,695
	1.01	1.39	0.38		NORTH INC. LIMITS LOGAN & SOUTH INC. LIMITS NORTH LOGAN	5,330	8,695
	1.39	2.75	1.36		1800 NORTH	4,210	7,820
	2.75	4.32	1.57		NORTH INC. LIMITS NORTH LOGAN & S. INC. LIMITS HYDE PARK	3,345	3,225
	4.32	4.79	0.47		200 WEST STREET - SR 91	3,345	3,225
A00238	**0.00**	**0.17**	**0.17**	*	**JUNCTION SR 165**	**1,710**	**1,710**
	0.17	1.71	1.54		EAST INC. LIMITS NIBLEY & WEST INC. LIMITS MILLVILLE	1,710	1,710
	1.71	3.25	1.54		NORTH INC. LIMITS MILLVILLE & S. INC. LIMITS PROVIDENCE	1,555	1,940
	3.25	3.35	0.10		NORTH INCORPORATED LIMITS PROVIDENCE	1,555	1,940

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	3.35	4.16	0.81		SOUTH INCORPORATED LIMITS RIVER HEIGHTS	3,175	3,175
	4.16	4.21	0.05		NORTH INC. LIMITS RIVER HEIGHTS & SOUTH INC.LIMITS LOGAN	4,765	3,520
	4.21	4.68	0.47		VIA 300 SOUTH - SR 91	6,235	3,590
A00239	**0.00**	**1.04**	**1.04**	*	**JUNCTION SR 91 - JUNCTION SR 237**	**16,285**	**15,700**
A00240	**0.00**	**1.22**	**1.22**	*	**SOUTHBOUND RAMP FAI 15 - SR 38**	**4,280**	**4,035**
A00241	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 114 - FAI 15 VIA 1600 NORTH OREM**	**13,765**	**13,100**
A00243	**0.00**	**2.41**	**2.41**	*	**JUNCTION SR 89 - BEAVER MOUNTAIN SKI AREA**	**605**	**570**
A00244	**0.00**	**0.19**	**0.19**	*	**JUNCTION SR 6 VIA POPLAR STREET**	**3,415**	**4,690**
	0.19	0.91	0.72		JUNCTION SR 157 VIA MAIN STREET - SR 6	3,000	3,975
A00248	**0.00**	**1.37**	**1.37**	*	**JUNCTION SR 224**	**9,090**	**8,615**
	1.37	3.12	1.75		NORTHEAST INCORPORATED LIMITS PARK CITY	4,500	4,445
	3.12	4.51	1.39		JUNCTION SR 40	3,550	3,510
	4.51	4.63	0.12		SUMMIT - WASATCH COUNTY LINE	3,550	3,510
	4.63	9.56	4.93		JUNCTION FAS 189 ROAD TO PEOA	2,295	2,265
	9.56	14.45	4.89		WASATCH - SUMMIT COUNTY LINE - JUNCTION SR 32	2,295	2,265
A00256	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 89**	**1,965**	**1,995**
	1.60	2.52	0.92		SOUTH INCORPORATED LIMITS REDMOND	460	455
	2.52	4.51	1.99		NORTH INCORPORATED LIMITS REDMOND	510	480
	4.51	5.62	1.11		SEVIER - SANPETE COUNTY LINE - JUNCTION SR 89	510	480
A00257	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 21 IN MILFORD**	**510**	**500**
	0.50	12.46	11.96		NORTH INCORPORATED LIMITS MILFORD	390	390
	12.46	22.35	9.89		BEAVER - MILLARD COUNTY LINE	485	490
	22.35	53.64	31.29		BLACK ROCK	485	490
	53.64	66.24	12.60		CLEAR LAKE	990	1,000
	66.24	69.26	3.02		DESERET- SR 6 EAST OF HINCKLEY	1,275	1,300
A00258	**0.00**	**0.18**	**0.18**	*	**JUNCTION FAI 70**	**560**	**505**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.18	0.47	0.29		300 WEST IN ELSINORE	560	505
	0.47	0.94	0.47		CENTER STREET IN ELSINORE	1,735	1,390
	0.94	2.12	1.18		EAST INCORPORATED LIMITS ELSINORE - SR 118	1,630	1,455
A00259	**0.00**	**0.33**	**0.33**	*	**JUNCTION SR 24 - FAI 70**	**2,125**	**2,000**
A00260	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 24**	**1,995**	**1,880**
	0.62	1.83	1.21		SOUTH INCORPORATED LIMITS AURORA	1,205	1,135
	1.83	4.19	2.36		NORTH INCORPORATED LIMITS AURORA - JUNCTION SR 50	1,265	1,190
A00261	**0.00**	**0.87**	**0.87**	*	**JUNCTION SR 163**	**75**	**100**
	0.87	22.69	21.82		JUNCTION SR 316 GOOSENECKS STATE PARK	75	70
	22.69	32.74	10.05		JUNCTION LOCAL ROAD - JUNCTION SR 95	75	70
A00262	**0.00**	**30.58**	**30.58**	*	**JUNCTION SR 191**	**640**	**630**
	30.58	40.12	9.54		ANETH - UTAH - COLORADO STATE LINE	1,050	1,025
A00264	**0.00**	**5.07**	**5.07**	*	**JUNCTION SR 31**	**505**	**475**
	5.07	10.74	5.67		SANPETE - EMERY COUNTY LINE	505	475
	10.74	15.34	4.60		EMERY - CARBON COUNTY LINE - JUNCTION SR 96	505	475
A00265	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 114**	**6,920**	**5,025**
	0.44	2.28	1.84		JUNCTION FAI 15 VIA 1200 SOUTH IN OREM	37,850	36,965
	2.28	2.73	0.45		JUNCTION SR 89 IN OREM	39,340	38,610
	2.73	3.66	0.93		800 EAST IN OREM VIA UNIVERSITY PARKWAY (BYU DIAG.)	37,610	36,915
	3.66	4.11	0.45		SOUTH INC. LIMITS OREM & NORTH INC. LIMITS PROVO	37,610	36,915
	4.11	4.32	0.21		200 WEST - UNIVERSITY AVENUE	37,610	36,915
A00266	**0.00**	**0.76**	**0.76**	*	**JUNCTION FAI 215**	**40,030**	**39,290**
	0.76	2.48	1.72		REDWOOD ROAD VIA 4700 SOUTH	35,175	34,525
	2.48	2.83	0.35		WEST INCORPORATED LIMITS MURRAY	33,520	32,900
	2.83	3.36	0.53		JUNCTION FAI 15 VIA 4500 SOUTH	33,420	32,800
	3.36	3.51	0.15		MAIN STREET	32,780	32,180

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	3.51	3.91	0.40		STATE STREET VIA 4500 SOUTH	35,745	35,745
	3.91	4.10	0.19		EAST INCORPORATED LIMITS MURRAY	35,745	35,745
	4.10	4.39	0.29		500 EAST STREET FAU 1037	33,100	34,835
	4.39	4.70	0.31		700 EAST STREET SR 71 VIA 4500 SOUTH	25,450	26,790
A00266	4.70	5.30	0.60		900 EAST STREET	17,225	18,785
	5.30	5.96	0.66		1300 EAST STREET SR 181 VIA 4500 SOUTH	15,090	17,755
	5.96	6.85	0.89		HIGHLAND DRIVE	10,915	13,670
	6.85	7.36	0.51		2300 EAST STREET VIA 4500 SOUTH	10,915	13,670
	7.36	8.07	0.71		2700 EAST STREET - WASATCH BOULEVARD	11,500	12,190
A00268	**0.00**	**0.70**	**0.70**	*	**JUNCTION FAI 15 - 300 WEST VIA 600 NORTH IN SALT LAKE CITY**	**31,910**	**30,765**
A00269	**0.00**	**0.58**	**0.58**	*	**JUNCTION GORE FAI 15**	**45,445**	**44,780**
	0.58	0.72	0.14		300 WEST VIA 600 SOUTH	32,860	32,375
	0.72	1.01	0.29		WEST TEMPLE - STATE STREET VIA 600 SOUTH	30,635	30,185
	1.01	1.30	0.29	*	STATE STREET VIA 500 SOUTH WESTBOUND	31,130	30,240
	1.30	1.60	0.30		WEST TEMPLE	33,695	32,730
	1.60	2.18	0.58		300 WEST - JUNCTION GORE FAI 15 VIA 500 SOUTH	47,750	46,385
A00270	**0.00**	**1.18**	**1.18**	*	**JUNCTION FAI 15 AT 900 SOUTH OFF RAMP**	**23,655**	**22,965**
	1.18	1.93	0.75		900 SOUTH - 400 SOUTH VIA WEST TEMPLE	25,280	24,370
A00271	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 274**	**915**	**1,005**
	1.10	3.53	2.43		NORTH INCORPORATED LIMITS PAROWAN	840	930
	3.53	4.32	0.79		SOUTH INCORPORATED LIMITS PARAGONAH	725	795
	4.32	5.61	1.29		NORTH INCORPORATED LIMITS PARAGONAH - JUNCTION FAI 15	150	165
A00272	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 106**	**4,815**	**4,640**
	0.64	0.98	0.34		LOCAL ROAD - SR 89	5,715	5,510
A00273	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 89**	**8,675**	**8,675**
	0.20	0.42	0.22		NORTHWEST INCORPORATED LIMITS FARMINGTON	8,675	8,675

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.42	2.34	1.92		SOUTH INCORPORATED LIMITS KAYSVILLE	12,465	12,875
	2.34	2.96	0.62		200 NORTH VIA MAIN - FAI 15 VIA 200 NORTH	13,810	13,785
A00274	**0.00**	**1.07**	**1.07**	*	**JUNCTION SR 143 IN PAROWAN**	**2,030**	**2,030**
	1.07	1.24	0.17		NORTH INCORPORATED LIMITS PAROWAN - FAI 15	1,130	1,130
A00275	**0.00**	**3.83**	**3.83**	*	**JUNCTION SR 95 - NATURAL BRIDGES NATIONAL MONUMENT**	**175**	**175**
A00276	**0.00**	**27.60**	**27.60**	*	**JUNCTION SR 95**	**765**	**755**
	27.60	35.11	7.51		TICABOO ROAD - GLEN CANYON NATIONAL RECREATION AREA	560	550
	35.12	71.22	36.11		GLEN CANYON RECREATION AREA - SR 95	285	280
A00279	**0.00**	**15.29**	**15.29**	*	**POTASH PLANT - SR 191 NORTH OF MOAB**	**370**	**345**
A00280	**0.00**	**0.40**	**0.40**	*	**JUNCTION FAI 80 - MAIN STREET IN COALVILLE**	**4,295**	**4,050**
A00282	**0.00**	**0.06**	**0.06**	*	**500 SOUTH VIA GUARDSMAN WAY SR 282 - 400 SOUTH**	**23,850**	**22,990**
	0.07	0.48	0.41	*	UNIVERSITY STREET VIA 400 SOUTH SR 282	11,475	11,180
	0.48	1.04	0.56		GUARDSMAN WAY VIA HEMPSTEAD - WASATCH DRIVE	16,065	15,485
	1.05	1.14	0.09	*	FOOTHILL BOULEVARD SR 186 VIA WASATCH DRIVE SR 282	26,245	25,300
	1.14	1.43	0.29		JUNCTION POLLOCK ROAD VIA WASATCH DRIVE SR 282	27,015	26,045
	1.43	1.64	0.21		JUNCTION HEMPSTEAD ROAD VIA WASATCH DRIVE	28,685	27,955
	1.64	1.90	0.26		JUNCTION WASATCH DRIVE VIA MEDICAL DRIVE SR 282	14,710	14,335
	1.90	2.44	0.54		JUNCTION ROAD TO HOSPITAL AREA VIA SR 282	6,775	6,600
	2.44	2.54	0.10		JUNCTION 500 AVENUE	6,775	6,600
	2.54	3.55	1.01		JCT. MILITARY WEST - 100 SOUTH VIA NORTH CAMPUS ROAD	6,775	6,600
A00283	**0.00**	**1.33**	**1.33**	*	**JCT. SR 55 - COLLEGE OF EASTERN UTAH VIA 300 EAST PRICE**	**5,880**	**7,485**
A00284	**0.00**	**0.56**	**0.56**	*	**JUNCTION 4100 SOUTH VIA SR 284 - HARRISON BOULEVARD**	**2,715**	**2,645**
	0.56	1.01	0.45	*	JUNCTION SR 203 - TAYLOR AVENUE	7,890	7,690
	1.01	1.67	0.66	*	JUNCTION PERIPHERAL ROAD - SKYLINE DRIVE SR 284	2,430	2,365
	1.67	1.72	0.05	*	JUNCTION HARRISON BOULEVARD - PERIPHERAL ROAD	7,655	7,460
	1.72	1.75	0.03	*	JUNCTION SR 203 VIA 4000 SOUTH - PERIPHERAL ROAD	4,365	2,290

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00285	**0.00**	**0.37**	**0.37**	*	**ROADS ON GROUNDS OF INSTITUTE FOR THE DEAF**	**50**	**45**
A00286	**0.00**	**1.19**	**1.19**	*	**JUNCTION SR 235 - YOUTH DEVELOPMENT CENTER**	**765**	**745**
A00287	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 140 - VEHICLE DIRECTION STATION**	**3,385**	**3,295**
A00288	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 89 VIA 1200 EAST**	**7,150**	**5,570**
A00288	0.50	0.99	0.49		1000 NORTH SR 288 - SR 237	7,910	7,705
A00289	**0.00**	**0.66**	**0.66**	*	**JUNCTION MAIN STREET SR 130 VIA CENTER STREET**	**13,630**	**13,140**
	0.66	1.29	0.63		800 WEST VIA CENTER STREET	7,335	7,070
	1.29	1.67	0.38		800 WEST VIA 200 SOUTH	6,565	6,395
	1.67	1.88	0.21		300 WEST - CENTER STREET VIA 300 WEST	7,145	6,885
A00290	**0.00**	**1.16**	**1.16**	*	**JUNCTION SR 89 TO SNOW COLLEGE IN EPHRAIM**	**3,970**	**3,825**
A00291	**0.00**	**0.47**	**0.47**	*	**HARRISON BOULEVARD - STATE SCHOOL FOR THE BLIND**	**115**	**110**
A00292	**0.00**	**1.68**	**1.38**	*	**ROADS ON SALT LAKE COMMUNITY COLLEGE**	**5,885**	**5,735**
A00293	**0.00**	**1.05**	**1.05**	*	**ROADS ON STATE CAPITOL GROUNDS**	**2,240**	**2,180**
A00294	**0.00**	**0.38**	**0.38**	*	**ROADS AT STATE MENTAL HOSPITAL**	**1,720**	**1,675**
A00295	**0.00**	**0.65**	**0.65**	*	**MOTOR VEHICLE TEST COURSE OREM**	**215**	**210**
A00296	**0.00**	**1.50**	**1.50**	*	**ROADS ON GROUNDS OF AMERICAN FORK TRAINING SCHOOL**	**1,075**	**1,045**
A00297	**0.00**	**1.25**	**1.25**	*	**ROADS ON STATE FAIR GROUNDS**	**1,060**	**1,030**
A00298	**0.00**	**1.00**	**1.00**	*	**ROADS WITHIN BROWNING ARMORY SOUTH OGDEN**	**1,020**	**990**
A00299	**0.00**	**1.03**	**1.03**	*	**MOTOR VEHICLE TEST COURSE**	**1,735**	**1,690**
A00300	**0.00**	**4.33**	**4.33**	*	**SNOW CANYON ROAD**	**785**	**740**
A00301	**0.00**	**2.04**	**2.04**	*	**STEINAKER STATE PARK ROAD**	**185**	**175**
A00302	**0.00**	**3.60**	**3.60**	*	**ROCKPORT STATE PARK ROAD**	**580**	**555**
A00303	**0.00**	**1.28**	**1.28**	*	**GOBLIN VALLEY STATE PARK ROAD**	**105**	**100**
A00304	**0.00**	**0.26**	**0.26**	*	**HYRUM STATE PARK ROAD**	**1,065**	**1,145**
A00306	**0.00**	**0.18**	**0.18**	*	**EAST CANYON STATE PARK ROAD**	**375**	**360**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
A00308	**0.00**	**2.14**	**2.14**	*	**KODACHROME STATE PARK ROAD**	**100**	**95**
A00309	**0.00**	**0.33**	**0.33**	*	**MILLSITE STATE PARK ROAD**	**240**	**230**
A00310	**0.00**	**0.34**	**0.34**	*	**MINERSVILLE STATE PARK ROAD**	**230**	**220**
A00311	**0.00**	**1.21**	**1.21**	*	**JUNCTION SR 40**	**370**	**355**
	1.21	2.56	1.35		BEGIN CONSTRUCTED - STARVATION BOAT RAMP	300	285
A00312	**0.00**	**0.58**	**0.58**	*	**WILLARD BAY STATE PARK ROAD SOUTH MARINA**	**430**	**415**
A00313	**0.00**	**2.20**	**2.20**	*	**DEAD HORSE POINT**	**600**	**575**
	2.20	22.60	20.40		SAN JUAN - GRAND COUNTY LINE - JUNCTION SR 191	480	450
A00314	**0.00**	**0.76**	**0.76**	*	**JUNCTION SR 189 - BOAT RAMP DEER CREEK RESEVIOR**	**375**	**360**
A00315	**0.00**	**1.74**	**1.74**	*	**WILLARD BAY STATE PARK ROAD NORTH MARINA**	**1,765**	**1,700**
A00316	**0.00**	**3.53**	**3.53**	*	**GOOSENECKS STATE PARK - JUNCTION SR 261**	**130**	**120**
A00317	**0.00**	**1.62**	**1.62**	*	**ROADS ON UTAH DEPARTMENT OF TRANSPORTATION GRNDS**	**2,085**	**2,030**
A00318	**0.00**	**2.22**	**2.22**	*	**JUNCTION SR 9 - QUAIL CREEK STATE PARK**	**2,500**	**1,350**
A00319	**0.00**	**1.43**	**1.43**	*	**JUNCTION SR 40 - JORDANELLE RESEVIOR**	**1,500**	**NA**
A00320	**0.00**	**2.19**	**2.19**	*	**EMERGENCY VEHICLE OPERATION FACILITY**	**125**	**120**
A00666	**0.00**	**1.70**	**1.70**	*	**JUNCTION SR 191**	**4,020**	**4,285**
	1.70	17.09	15.39		EAST INC. LIMITS MONTICELLO - UTAH - COLORADO STATE LINE	1,925	1,865
102	**2.28**	**2.57**	**0.29**	*	**LOCAL ROAD LEFT**	**440**	**425**
	2.57	3.94	1.37		TOOELE URBAN BOUNDARY - INTERNATIONAL SMELTER	440	425
103	**0.00**	**3.32**	**3.32**	*	**JUNCTION SR 112 - JUNCTION SR 138 EAST OF GRANTSVILLE**	**690**	**650**
104	**0.00**	**1.55**	**1.55**	*	**JUNCTION SR 138**	**525**	**430**
	1.55	5.93	4.38		N. INC. LIMITS GRANTSVILLE - FAI 80 BURMESTER INTERCHANGE	450	275
107	**0.00**	**1.14**	**1.14**	*	**JUNCTION SR 58**	**305**	**285**
	1.14	2.23	1.09		WENDOVER EAST INCORPORATED LIMITS	305	285
	2.23	3.09	0.86		INDUSTRIAL SITE - FAI 80 NEAR WENDOVER	220	205
108	**0.00**	**21.34**	**21.34**	*	**JUNCTION SR 199 DUGWAY PROVING GROUNDS**	**325**	**300**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	21.34	36.72	15.38		IOSEPA - FAI 80 TIMPIE WATERFOWL AREA	565	530
111	**2.49**	**3.00**	**0.51**	*	**JUNCTION SR 201 2100 SOUTH STREET VIA 7200 WEST**	**640**	**615**
	3.00	4.80	1.80	*	BEGIN UNCONSTRUCTED	NA	NA
	4.80	6.02	1.22	*	BEGIN CONSTRUCTED	350	335
112	**0.00**	**7.19**	**7.19**	*	**ANTELOPE STATE PARK - JUNCTION SR 110**	**535**	**505**
120	**0.00**	**1.92**	**1.92**	*	**JUNCTION WEST DAVIS HIGHWAY - JUNCTION SR 227**	**1,280**	**1,245**
128	**0.00**	**15.16**	**15.16**	*	**JUNCTION FAI 80 AT ROWLEY JUNCTION - MAGNESIUM PLANT**	**585**	**550**
133	**7.58**	**13.20**	**5.62**	*	**SALT LAKE URBAN BOUNDARY**	**2,540**	**2,395**
	13.20	16.75	3.55		ROAD TO PINECREST - SR 65	855	805
135	**2.34**	**7.77**	**5.43**	*	**HERRIMAN VIA 12600 SOUTH STREET**	**2,575**	**2,500**
	7.77	9.86	2.09		SOUTH INCORPORATED LIMITS JORDAN - JUNCTION FAU 1004	9,260	8,990
156	**0.00**	**1.52**	**1.52**	*	**UNCONSTRUCTED**	**NA**	**NA**
	1.52	2.00	0.48	*	BEGIN CONSTRUCTED	670	645
181	**0.00**	**1.04**	**1.04**	*	**JUNCTION FAS 188**	**1,625**	**1,530**
	1.04	2.34	1.30		EAST INCORPORATED LIMITS COALVILLE	1,245	1,170
	2.34	10.31	7.97		LOCAL ROAD EAST OF COALVILLE	1,090	1,025
	10.31	13.61	3.30		UPTON	495	465
	13.61	17.86	4.25		PINEVIEW	415	390
	17.86	28.24	10.38		PINE CLIFF - JUNCTION SR 150	295	275
	28.24	37.90	9.66	*	UNCONSTRUCTED	NA	NA
183	**0.00**	**2.87**	**2.87**	*	**JUNCTION SR 32**	**825**	**775**
	2.87	11.71	8.84		EAST INCORPORATED LIMITS OAKLEY	710	670
	11.71	18.87	7.16		SMITH&MOREHOUSE ROAD-NAT. FOREST BNDRY HOLIDAY PARK	280	270
188	**0.41**	**6.68**	**6.27**	*	**JUNCTION SR 32 NEAR WANSHIP**	**1,715**	**1,615**
	6.68	7.97	1.29		SOUTH INCORPORATED LIMITS COALVILLE	1,750	1,650
	7.97	9.35	1.38		JUNCTION FAS 181 IN COALVILLE	1,275	1,200

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	9.35	13.30	3.95		NORTH INCORPORATED LIMITS COALVILLE - FAI 80	2,375	2,240
189	**0.00**	**0.43**	**0.43**	*	**JUNCTION SR 248**	**1,965**	**1,850**
	0.43	6.76	6.33		WASATCH - SUMMIT COUNTY LINE - SR 32 WEST OF OAKLEY	1,965	1,850
192	**0.00**	**7.55**	**7.55**	*	**UTAH - WYOMING STATE LINE**	**210**	**195**
	7.55	13.29	5.74	*	UNCONSTRUCTED	NA	NA
192	13.29	25.38	12.09	*	BEGIN CONSTRUCTION PORTION - COLORADO STATE LINE	195	180
205	**0.00**	**2.95**	**2.95**	*	**SARATOGA RESORT - URBAN BOUNDARY FAU 1401**	**400**	**230**
210	**0.00**	**3.69**	**3.69**	*	**JUNCTION SR 77**	**315**	**295**
217	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 115 - FAI 15 SOUTH OF BENJAMIN**	**645**	**605**
242	**0.00**	**0.58**	**0.58**	*	**JUNCTION SR 40 IN HEBER**	**2,800**	**2,430**
	0.58	4.42	3.84		EAST INCORPORATED LIMITS HEBER	1,580	800
	4.42	14.00	9.58		POLE CREEK CANYON - UINTAH NATIONAL FOREST BOUNDARY	735	690
247	**0.00**	**2.76**	**2.76**	*	**JUNCTION SR 189**	**1,055**	**1,170**
	2.76	3.64	0.88		NORTH INC. LIMITS WALLSBURG - CENTER OF WALLSBURG	1,020	1,185
250	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 224**	**1,525**	**1,435**
	1.48	4.37	2.89		EAST INCORPORATED LIMITS MIDWAY - SR 40 NORTH OF HEBER	2,440	2,300
252	**0.00**	**9.02**	**9.02**	*	**JUNCTION SR 40 - SR 87 NEAR BRIDGELAND**	**370**	**345**
253	**0.00**	**8.05**	**8.05**	*	**JUNCTION SR 40 NEAR FORT DUCHESNE - SR 121**	**1,425**	**1,340**
257	**0.00**	**12.68**	**12.68**	*	**JUNCTION SR 121 - NEOLA**	**945**	**890**
262	**0.00**	**3.24**	**3.24**	*	**RED WASH OIL FIELD - SR 45**	**155**	**145**
	3.24	15.61	12.37	*	SR 45 - SR 40 NEAR JENSEN	560	525
264	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 40**	**3,985**	**3,755**
	1.10	14.27	13.17		FORT DUCHESNE - JUNCTION SR 88	1,385	1,305
270	**0.00**	**4.55**	**4.55**	*	**YUBA STATE PARK - FAI 15 SOUTH OF LEVAN**	**375**	**350**
272	**0.00**	**3.95**	**3.95**	*	**MAIN ENTRANCE TO INTERMOUNTAIN POWER PLANT**	**250**	**115**
	3.95	14.04	10.09		JUNCTION FAS 301	250	115

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	14.04	35.75	21.71		MILLARD - JUAB COUNTY LINE - TOPAZ MOUNTAIN	275	145
273	**0.00**	**9.33**	**9.33**	*	**SR 6 JERICHO JUNCTION - JUNCTION SR 132 WEST OF NEPHI**	**150**	**140**
274	**0.00**	**0.67**	**0.67**	*	**CENTER OF MONA**	**500**	**470**
	0.67	6.99	6.32		WEST INCORPORATED LIMITS MONA	285	265
	6.99	10.41	3.42		JUAB - UTAH COUNTY LINE	325	305
274	10.41	10.95	0.54		SOUTH INCORPORATED LIMITS GOSHEN - SR 6 IN GOSHEN	435	410
277	**0.00**	**3.70**	**3.70**	*	**JUNCTION SR 28**	**105**	**95**
	3.70	8.07	4.37		JUNCTION SR 132 WEST OF NEPHI - OLD SR 41	260	245
283	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 117 IN WALES AT 200 NORTH**	**280**	**185**
	0.20	8.92	8.72		NORTH INCORPORATED LIMITS WALES	445	425
	8.92	9.65	0.73		SOUTH INC. LIMITS FOUNTAIN GREEN - JUNCTION SR 132	300	280
287	**0.00**	**1.57**	**1.57**	*	**JUNCTION SR 137**	**930**	**875**
	1.57	3.50	1.93		EAST INC. LIMITS MAYFIELD - MANTI LA SAL NAT. FOREST BNDRY	605	570
290	**0.00**	**4.83**	**4.83**	*	**CONSUMERS**	**295**	**275**
	4.83	12.57	7.74		LOCAL ROAD - SR 6 NEAR SPRING GLEN	630	590
291	**0.00**	**2.10**	**2.10**	*	**BEGINNING OF ROUTE NEAR MUTUAL**	**425**	**400**
	2.10	6.90	4.80		SPRING CANYON	955	900
	6.90	7.96	1.06		WEST INCORPORATED LIMITS HELPER - JUNCTION SR 6	1,500	1,415
298	**0.52**	**2.86**	**2.34**	*	**PRICE NORTHEAST URBAN BOUNDARY**	**2,030**	**4,570**
	2.86	3.44	0.58		CARBONVILLE - SR 6	2,675	2,675
299	**0.73**	**4.25**	**3.52**	*	**PRICE EAST URBAN BOUNDARY - CARBON COUNTY AIRPORT**	**2,265**	**2,135**
301	**0.00**	**4.69**	**4.69**	*	**SR 6 WEST OF DELTA**	**2,840**	**1,950**
	4.69	10.80	6.11		SUTHERLAND	1,700	1,175
	10.80	13.78	2.98		SUGARVILLE - FAS 272	225	105
307	**0.00**	**6.91**	**6.91**	*	**JUNCTION FAI 15 - SOUTH INCORPORATED LIMITS KANOSH**	**410**	**385**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
309	**0.00**	**4.09**	**4.09**	*	**FAI 15 MEADOW INTERCHANGE**	**300**	**335**
	4.09	6.14	2.05		JUNCTION LOCAL ROAD 4 MILES NORTH - SR 100	215	340
315	**0.00**	**0.55**	**0.55**	*	**JUNCTION SR 89**	**615**	**580**
	0.55	2.41	1.86		CENTER OF CENTRAL	1,215	1,215
	2.41	3.01	0.60		WEST INCORPORATED LIMITS ANNABELLA	1,220	1,220
	3.01	7.13	4.12		NORTH INCORPORATED LIMITS ANNABELLA	1,295	1,295
315	7.13	7.16	0.03		EAST INCORPORATED LIMITS RICHFIELD	1,200	1,200
	7.16	7.44	0.28		EAST URBAN BOUNDARY - JUNCTION LOCAL ROAD	1,200	1,200
319	**0.00**	**6.35**	**6.35**	*	**JUNCTION SR 25 AT FISH LAKE**	**170**	**160**
	6.35	31.36	25.01		JUNCTION FAS 377	40	35
	31.36	35.34	3.98		JUNCTION LOCAL ROAD AT SOLDIER CANYON - FAI 70	35	30
330	**0.00**	**4.35**	**4.35**	*	**JUNCTION SR 89**	**650**	**610**
	4.35	29.13	24.78		MANTI NATIONAL FOREST BOUNDARY	175	125
	29.13	29.59	0.46		EMERY COUNTY LINE - JOES VALLEY RESEVOIR	175	125
331	**0.73**	**2.74**	**2.01**	*	**PRICE NORTHWEST URBAN BOUNDARY - JUNCTION FAS 298**	**515**	**485**
333	**0.00**	**3.32**	**3.32**	*	**JUNCTION SR 155**	**380**	**355**
	3.32	3.74	0.42		SOUTH INCORPORATED LIMITS OF ELMO	220	205
	3.74	5.38	1.64		NORTH INCORPORATED LIMITS ELMO - JUNCTION SR 155	190	175
334	**0.00**	**1.93**	**1.93**	*	**JUNCTION SR 10 SOUTH OF HUNTINGTON - LAWRENCE**	**485**	**455**
336	**0.00**	**5.23**	**5.23**	*	**FOREST BOUNDARY**	**1,115**	**1,050**
	5.23	6.23	1.00		WEST INCORPORATED LIMITS FERRON - SR 10 IN FERRON	1,540	1,450
344	**0.00**	**8.95**	**8.95**	*	**JUNCTION SR 128 NORTHEAST OF MOAB - CASTLETON**	**545**	**480**
346	**0.00**	**1.61**	**1.61**	*	**SAN JUAN COUNTY LINE - SR 279 POTASH PLANT**	**495**	**465**
351	**0.00**	**0.93**	**0.93**	*	**JUNCTION SR 130**	**520**	**560**
	0.93	14.66	13.73		WEST INCORPORATED LIMITS MINERSVILLE	320	300
	14.66	14.96	0.30		SOUTH INCORPORATED LIMITS MILFORD - SR 21 IN MILFORD	505	475

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
357	**0.00**	**0.14**	**0.14**	*	**JUNCTION SR 160 IN BEAVER**	**1,190**	**1,425**
	0.14	4.93	4.79		NORTH INCORPORATED LIMITS BEAVER	820	1,025
	4.93	8.77	3.84		JUNCTION LOCAL ROAD AT MANDERFIELD - FAI 15	70	110
358	**27.40**	**50.97**	**23.57**	*	**JUNCTION BURR TRAIL**	**90**	**65**
	50.97	60.52	9.55		GARFIELD - WAYNE COUNTY LINE - JUNCTION SR 24	75	60
361	**0.00**	**13.37**	**13.37**	*	**TROPIC JUNCTION SR 12**	**50**	**45**
361	13.37	33.72	20.35		WIDTSOE	50	45
	33.72	34.98	1.26		SOUTH INCORPORATED LIMITS ANTIMONY - SR 22 IN ANTIMONY	135	125
371	**0.00**	**4.00**	**4.00**		**GOBLIN VALLEY-SR 24 UNCONSTRUCTED**	**NA**	**NA**
377	**0.00**	**3.41**	**3.41**	*	**JUNCTION SR 72 NORTH OF LOA**	**50**	**45**
	3.41	14.08	10.67		WAYNE - SEVIER COUNTY LINE - JUNCTION FAS 319	95	90
379	**0.00**	**7.58**	**7.58**	*	**JUNCTION FAS 380 - WECCO PLANT WEST OF CEDAR CITY**	**650**	**1,370**
380	**4.58**	**7.49**	**2.91**	*	**JUNCTION FAS 379 - SR 56 WEST OF CEDAR CITY**	**1,465**	**1,380**
381	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 130**	**540**	**520**
	0.62	2.29	1.67		NORTH URBAN BOUNDARY	540	520
	2.29	3.25	0.96		WEST INCORPORATED LIMITS ENOCH	735	690
	3.25	7.91	4.66		JCT. FAS 382 EAST OF ENOCH - FAI 15 SUMMIT INTERCHANGE	600	565
382	**0.00**	**1.47**	**1.47**	*	**JUNCTION SR 56**	**3,790**	**3,680**
	1.47	5.50	4.03		JUNCTION ROAD TO AIRPORT	3,530	3,430
	5.50	8.49	2.99		JUNCTION LOCAL ROAD TO LUND	3,220	3,125
	8.49	10.65	2.16		JUNCTION SR 130 - JUNCTION FAS 381	1,815	1,710
390	**0.00**	**3.97**	**3.97**	*	**JUNCTION FAI 15**	**195**	**180**
	3.97	4.87	0.90		SOUTH INCORPORATED LIMITS KANARRAVILLE	500	470
	4.87	9.01	4.14		NORTH INCORPORATED LIMITS KANARRAVILLE - FAI 15	655	605
392	**31.39**	**38.27**	**6.88**	*	**JUNCTION SR 12**	**370**	**345**
	38.27	39.49	1.22		TEASDALE - SR 24 WEST OF TORREY	370	345

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
403	**0.00**	**14.46**	**14.46**	*	**ARIZONA - UTAH STATE LINE**	**65**	**60**
	14.46	19.96	5.50		LOCAL ROAD WHITE MESA MOUNTAIN - SR 262 N.W. TO ANETH	690	650
404	**0.00**	**12.95**	**12.95**	*	**JUNCTION SR 262 ANETH - UTAH - COLORADO STATE LINE**	**660**	**620**
405	**0.00**	**18.29**	**18.29**	*	**JUNCTION SR 666 EAST OF MONTICELLO**	**180**	**185**
	18.29	42.84	24.55		SUMMIT POINT - SR 46 WEST OF LA SAL	155	135
415	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 212**	**10,500**	**2,530**
415	1.50	2.74	1.24		APPROXIMATELY 1200 SOUTH IN WASHINGTON	7,640	2,700
	2.74	4.53	1.79		SOUTH INCORPORATED LIMITS WASHINGTON	7,640	2,700
	4.53	5.21	0.68		EAST URBAN BOUNDARY	6,965	2,700
	5.21	7.50	2.29		EAST INCORPORATED LIMITS ST. GEORGE	6,180	6,020
416	**2.43**	**4.58**	**2.15**	*	**JUNCTION FAU 4002 SANTA CLARA**	**15,280**	**14,410**
	4.58	10.92	6.34		NORTH INCORPORATED LIMITS SANTA CLARA	5,955	5,615
	10.92	26.49	15.57		SHIVWITS-SR 18 AT VEYO	845	795
502	**0.00**	**0.15**	**0.15**	*	**EAST BOUND OFF RAMP FROM FAI 84**	**860**	**810**
	0.15	0.38	0.23		SOUTH INCORPORATED LIMITS SNOWVILLE	585	550
	0.38	1.57	1.19		JUNCTION FAS 526 IN SNOWVILLE	1,180	1,110
	1.57	2.71	1.14		NORTH INC. LIMITS SNOWVILLE - UTAH - IDAHO STATE LINE	1,115	1,050
504	**0.00**	**1.11**	**1.11**	*	**GOLDEN SPIKE MONUMENT**	**225**	**210**
	1.11	5.75	4.64		PROMONTORY JUNCTION	730	685
	5.75	7.80	2.05		LOCAL ROAD TO PROMONTORY POINT-SR 83 LAMPO JUNCTION	1,230	1,160
506	**0.00**	**3.75**	**3.75**	*	**JUNCTION SR 82 EAST OF GARLAND - JUNCTION SR 30**	**2,585**	**2,435**
	3.75	4.33	0.58		JUNCTION SR 81 IN FIELDING	745	700
	4.33	5.25	0.92		WEST INCORPORATED LIMITS FIELDING - SR 13	720	675
510	**0.00**	**2.67**	**2.67**	*	**JUNCTION SR 13**	**535**	**505**
	2.67	6.70	4.03		JUNCTION FAS 524	880	830
	6.70	8.61	1.91		JUNCTION FAS 512	2,125	2,000

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	8.61	8.71	0.10		SOUTH INCORPORATED LIMITS TREMONTON - SR 102	1,930	1,820
	8.71	9.72	1.01		JUNCTION SR 102 - 10TH NORTH (FAS-610)	730	685
512	**0.00**	**2.00**	**2.00**	*	**JUNCTION SR 102 WEST OF TREMONTON**	**650**	**675**
	2.00	4.00	2.00		JUNCTION LOCAL ROAD	370	400
	4.00	4.98	0.98		JUNCTION FAS 510	255	255
	4.98	6.18	1.20		WEST INCORPORATED LIMITS ELWOOD - SR 13 IN ELWOOD	300	280
514	**0.00**	**1.66**	**1.66**	*	**JUNCTION SR 13 - SOUTHBOUND RAMP FAI 15**	**1,215**	**1,145**
523	**0.00**	**12.63**	**12.63**	*	**BEAR RIVER BIRD REFUGE**	**820**	**770**
	12.63	14.43	1.80		BRIGHAM CITY WEST URBAN BOUNDARY-JUNCTION FAU 9002	1,060	1,020
524	**0.00**	**4.00**	**4.00**	*	**JUNCTION SR 83-FAS 510 WEST OF ELWOOD**	**790**	**745**
526	**0.00**	**1.66**	**1.66**	*	**JUNCTION FAI 84**	**740**	**695**
	1.66	2.46	0.80		WEST INCORPORATED LIMITS SNOWVILLE-FAS 502	765	720
538	**0.00**	**4.72**	**4.72**	*	**JUNCTION SR 23**	**1,360**	**1,280**
	4.72	5.46	0.74		BENSON	2,330	2,180
	5.46	6.65	1.19		JUNCTION LOCAL ROAD AT BENSON	3,870	3,650
	6.65	7.87	1.22		WEST URBANIZED BOUNDARY	3,870	3,650
	7.87	8.80	0.93		JUNCTION LOCAL ROAD AIRPORT-SR 91 NORTH OF LOGAN	4,015	3,870
540	**0.00**	**2.54**	**2.54**	*	**AVON**	**685**	**645**
	2.54	2.91	0.37		SOUTH INCORPORATED LIMITS PARADISE-SR 165 PARADISE	1,355	1,275
544	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 91**	**1,660**	**1,600**
	1.00	2.57	1.57		WEST INCORPORATED LIMITS NIBLEY-SR 165 IN NIBLEY	2,355	2,270
545	**0.00**	**4.97**	**4.97**	*	**JUNCTION SR 91**	**1,735**	**1,635**
	4.97	5.36	0.39		SOUTH INCORPORATED LIMITS HYRUM-SR 101 IN HYRUM	2,465	2,325
553	**4.14**	**5.53**	**1.39**	*	**NORTHWEST URBAN BOUNDARY LOGAN - JUNCTION FAS 538**	**7,850**	**7,565**
557	**0.00**	**13.09**	**13.09**	*	**JCT. SR 30 NORTH OF LAKETOWN - UTAH - IDAHO STATE LINE**	**390**	**365**
566	**0.00**	**0.57**	**0.57**	*	**PINEVIEW RESERVOIR**	**775**	**755**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
567	**0.00**	**0.50**	**0.50**	*	**LITTLE MOUNTAIN**	**900**	**1,200**
	0.50	4.00	3.50		ROAD TO INDUSTRIAL AREA	2,500	3,335
	4.00	7.01	3.01		WEST WARREN - SR 134	4,095	4,095
569	**0.00**	**0.21**	**0.21**	*	**OGDEN URBAN BOUNDARY**	**1,435**	**1,350**
	0.21	5.48	5.27		JUNCTION HARRISON BOULEVARD	1,365	1,285
	5.48	6.62	1.14		JUNCTION LOCAL ROAD IN LIBERTY	790	745
569	6.62	8.31	1.69		END OF CONSTRUCTION SECTION- JUNCTION SR 158	1,865	1,755
	8.32	9.16	0.84	*	JUNCTION SR 158 NORTHWEST OF EDEN	940	885
	9.16	9.73	0.57		JUNCTION FAS 570 - JUNCTION SR 158	970	915
570	**0.00**	**5.11**	**5.11**	*	**JUNCTION SR 39 EAST OF HUNTSVILLE - JUNCTION FAS 569**	**1,165**	**1,095**
591	**0.00**	**0.75**	**0.75**	*	**JUNCTION SR 66 IN MORGAN**	**1,165**	**1,610**
	0.75	7.97	7.22		WEST INCORPORATED LIMITS MORGAN	855	900
	7.97	8.87	0.90		PETERSON	1,670	1,670
	8.87	11.43	2.56		PETERSON STATION FAI 84 - JUNCTION SR 167	990	930
595	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 104**	**1,105**	**1,250**
	0.23	0.44	0.21	*	UNCONSTRUCTED	NA	NA
	0.44	1.08	0.64	*	BEGINNING OF CONSTRUCTION	600	860
	1.08	2.62	1.54		JUNCTION SR 39	4,730	4,730
	2.62	4.25	1.63		JUNCTION LOCAL ROAD	4,775	4,650
	4.25	5.52	1.27		NORTH INCORPORATED LIMITS HARRISVILLE-SR 134	4,735	4,615
596	**0.00**	**16.15**	**16.15**	*	**JUNCTION SR 89 EAST OF KANAB**	**125**	**115**
	16.15	23.46	7.31		GRAVEL ROAD RIGHT TO CANNONVILLE	60	55
	23.46	34.69	11.23		GRAVEL ROAD LEFT TO GLENDALE	60	55
	34.69	35.34	0.65		EAST INCORPORATED LIMITS ALTON	165	155
	35.34	39.06	3.72		NORTH INCORPORATED LIMITS ALTON - SR 89	130	120
597	**0.00**	**1.87**	**1.87**	*	**JUNCTION DEVIL SLIDE INTERCHANGE FAI 84**	**875**	**825**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.87	12.80	10.93		JUNCTION ROAD TO CROYDON - LOST CREEK RESEVOIR	370	345
598	**0.00**	**5.65**	**5.65**	*	**PROPOSED ROAD**	**NA**	**NA**
	5.65	6.30	0.65	*	JUNCTION SR 6 BEGIN CONSTRUCTION- FAS 298	760	715
601	**4.85**	**5.60**	**0.75**	*	**NORTH URBAN BOUNDARY - SR 92**	**4,525**	**4,360**
602	**7.20**	**10.93**	**3.73**	*	**JUNCTION SR 118 - JUNCTION SR 258**	**3,490**	**3,365**
603	**0.00**	**2.52**	**2.52**	*	**SOUTH SIDE SUMMIT INTERCHANGE**	**4,365**	**4,115**
603	2.52	4.89	2.37		JEREMY RANCH INTERCHANGE	4,400	4,150
	4.89	5.10	0.21		KIMBALL JUNCTION	2,320	2,185
	5.10	5.70	0.60	*	UNCONSTRUCTED PORTION	NA	NA
	5.70	7.87	2.17	*	BEGIN CONSTRUCTION PORTION - JUNCTION SR 40	1,525	1,435
604	**0.00**	**2.40**	**2.40**	*	**JEREMY RANCH INTERCHANGE-KIMBALL JUNCTION**	**3,130**	**2,950**
606	**0.00**	**6.43**	**6.43**	*	**SR 153 - NORTH CREEK COMMUNITY NORTHEAST OF BEAVER**	**360**	**230**
607	**0.00**	**3.50**	**3.50**	*	**FAS 357-FAS 606 NORTHEAST OF BEAVER**	**85**	**80**
609	**0.00**	**30.97**	**30.97**	*	**JUNCTION SR 9**	**35**	**30**
	30.97	37.93	6.96		FOREST BOUNDARY - JUNCTION SR 14	35	30
610	**1.90**	**2.58**	**0.68**	*	**JUNCTION FAI 15**	**2,240**	**1,865**
	2.58	3.55	0.97		1000 WEST - JUNCTION SR 82 IN GARLAND	2,240	1,865
613	**0.00**	**0.48**	**0.48**	*	**JUNCTION SR 164 VIA 1800 WEST**	**70**	**65**
	0.48	2.63	2.15	*	UNCONSTRUCTED	NA	NA
	2.63	3.39	0.76	*	JUNCTION SR 6 VIA 1700 WEST	135	125
	3.39	3.59	0.20	*	UNCONSTRUCTED	NA	NA
	3.59	4.08	0.49	*	CONSTRUCTED VIA 1600 WEST	135	125
	4.08	5.83	1.75	*	UNCONSTRUCTED	NA	NA
	5.83	9.47	3.64	*	BEGIN CONSTRUCTION VIA WOODLAND HILLS DRIVE	390	365
	9.47	9.82	0.35	*	BEGIN UNCONSTRUCTED - JUNCTION SR 6	390	365
615	**0.00**	**10.60**	**10.60**	*	**JUNCTION SR 19 - SWAYS BOTTOM**	**5**	**5**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
1001	**0.00**	**2.34**	**2.34**	*	**JUNCTION SR 48 - URBAN BOUNDARY**	**3,155**	**2,975**
1003	**0.00**	**0.76**	**0.76**	*	**JUNCTION FAI 80**	**135**	**125**
	0.76	2.90	2.14		BEGIN UNCONSTRUCTED - FAU 1006 NORTH URBAN BOUNDARY	NA	NA
1004	**0.00**	**1.50**	**1.50**	*	**URBANIZED BOUNDARY**	**10,010**	**9,755**
	1.50	2.50	0.97		WEST INCORPORATED LIMITS RIVERTON	11,010	10,730
	2.50	3.48	1.01		2700 WEST STREET VIA 12600 SOUTH - SR 68	15,225	14,940
1004	3.49	3.74	0.23	*	JUNCTION SR 71	10,565	10,185
	3.74	3.85	0.11		900 EAST DRAPER	9,160	8,830
	3.85	4.41	0.56		12400 SOUTH DRAPER	4,520	4,355
	4.41	4.90	0.49		1300 EAST	4,520	4,355
	4.90	5.55	0.67		1565 EAST DRAPER - 2000 EAST VIA 12300 SO	4,535	4,370
1005	**0.00**	**2.50**	**2.50**	*	**UNCONSTRUCTED**	**NA**	**NA**
	2.50	4.98	2.48	*	NORTH TEMPLE UNCONSTRUCTED - 4000 WEST	NA	NA
	4.98	5.38	0.40	*	BEGIN FAU 1005 - 2200 NORTH STREET	4,395	4,345
	5.38	6.15	0.77	*	JUNCTION 2200 NORTH - FAU 1006 UNCONSTRUCTED	NA	NA
1006	**0.00**	**3.50**	**3.50**	*	**FAU 1012 - 6200 SOUTH UNCONSTRUCTED**	**NA**	**NA**
	3.51	4.29	0.78	*	JUNCTION FAI 80 VIA EDDIE RICKENBAKER DRIVE	2,620	2,590
	4.29	8.58	4.19	*	BEGIN UNCONSTRUCTED - FAU 1006	NA	NA
	8.58	13.53	4.95	*	JUNCTION FAU 1006 - FAU 1011 UNCONSTRUCTED	NA	NA
	13.53	18.53	5.00	*	JCT. FAU 1006 UNCONSTRUCTED - NORTH URBAN BOUNDARY	NA	NA
1007	**0.00**	**1.40**	**1.40**	*	**JUNCTION FAU 1089 UNCONSTRUCTED**	**NA**	**NA**
	1.40	3.20	1.80	*	BEGIN CONSTRUCTED - FAU 1003	1,280	1,230
1008	**0.00**	**0.45**	**0.45**	*	**JUNCTION BANGERTER HIGHWAY UNCONSTRUCTED**	**NA**	**NA**
	0.45	0.95	0.50	*	BEGIN CONSTRUCTED	7,780	7,500
	0.95	1.95	1.00		JUNCTION 2700 WEST VIA 10400 SOUTH - REDWOOD ROAD	16,730	16,130
	1.96	2.28	0.32	*	JUNCTION FAI 15	31,715	30,575

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.28	2.81	0.53		STATE STREET VIA 10600 SOUTH STREET	26,715	25,755
	2.81	3.26	0.45		WEST INCORPORATED LIMITS SANDY	25,900	24,970
	3.26	3.75	0.51		JUNCTION SR 71 700 EAST STREET	25,775	24,850
	3.75	4.27	0.50		1000 EAST IN SANDY	22,850	22,030
	4.27	4.91	0.53		1300 EAST	15,090	14,545
	4.91	5.31	0.51		1700 EAST - 2000 EAST	8,180	7,885
1009	**0.00**	**0.75**	**0.75**	*	**14400 SOUTH STREET**	**1,415**	**1,375**
	0.75	2.26	1.51		SOUTH INCORPORATED LIMITS RIVERTON	2,015	1,850
	2.26	6.74	4.48		12600 SOUTH STREET SR 71 VIA 2700 WEST STREET	7,135	6,175
	6.74	8.24	1.50		9000 SOUTH	13,250	12,605
	8.24	9.74	1.50		7800 SOUTH STREET SR 48	15,280	14,730
	9.74	11.24	1.50		NORTH INCORPORATED LIMITS WEST JORDAN	15,280	14,730
	11.24	12.23	0.99		5400 SOUTH STREET SR 173	18,305	17,645
	12.23	13.21	0.98		4700 SOUTH STREET	21,060	20,300
	13.21	14.21	1.00		4100 SOUTH WEST VALLEY VIA 2700 WEST	20,785	20,035
	14.21	14.70	0.49		3500 SOUTH STREET SR 171	17,445	17,000
	14.70	16.12	1.42		3100 SOUTH - 2100 SOUTH END OF ROUTE	15,375	14,980
	16.12	16.24	0.12	*	BEGIN UNCONSTRUCTED	NA	NA
	16.24	17.78	1.54	*	BEGIN ROUTE NORTH SIDE 2100 SOUTH VIA 2700 WEST	11,985	11,300
	17.78	17.98	0.20		JUNCTION 900 SOUTH	11,985	11,300
	17.98	18.47	0.49		BEGIN UNCONSTRUCTED - FAU 1050	11,215	10,815
1010	**0.00**	**0.91**	**0.91**	*	**STATE STREET**	**17,445**	**16,815**
	0.91	1.19	0.28		VINE STREET VIA 5600 SOUTH	17,275	16,655
	1.19	1.79	0.60		900 EAST IN MURRAY	15,560	15,000
	1.79	2.12	0.33		1300 EAST STREET	13,850	13,350
	2.12	2.82	0.70		VAN WINKLE EXPRESSWAY - HIGHLAND DRIVE	6,840	6,595

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
1011	**0.00**	**0.35**	**0.35**		**JUNCTION FAU 1076 - FAU 1006 VIA 1700 WEST**		
				*	**UNCONSTRUCTED**	**NA**	**NA**
1012	**0.00**	**2.30**	**2.30**	*	**SR 48 WEST JORDAN UNCONSTRUCTED**	**18,640**	**17,975**
	2.30	3.15	0.85	*	PROVO CANAL	21,560	21,160
	3.15	4.05	0.90		BANGERTER HIGHWAY CONNECTION	21,560	21,160
	4.05	5.03	0.98		2700 WEST VIA 9000 SOUTH - REDWOOD ROAD	21,560	21,160
1013	**0.00**	**2.57**	**2.57**	*	**JUNCTION SR 71 12600 SOUTH**	**4,595**	**4,475**
1013	2.57	2.76	0.19		JUNCTION 10400 SOUTH - 10600 SOUTH VIA 1300 WEST	7,700	7,500
	2.76	4.46	1.70	*	JUNCTION 10400 SOUTH VIA 1300 WEST	7,700	7,500
	4.46	6.96	2.50		9000 SOUTH - 7000 SOUTH STREET	10,155	9,895
	6.96	7.38	0.42	*	JUNCTION 7000 SOUTH STREET	8,715	8,490
	7.38	9.05	1.67		6400 SOUTH STREET - 5400 SOUTH	4,975	4,845
1014	**0.00**	**0.36**	**0.36**	*	**JUNCTION SR 48**	**16,210**	**15,625**
	0.36	1.16	0.80		FAI 15 VIA 7800 SOUTH	15,050	14,510
	1.16	2.13	0.97		STATE STREET	11,015	10,735
	2.13	3.13	1.00		700 EAST STREET - 1300 EAST	9,330	10,010
1015	**0.00**	**1.73**	**1.73**	*	**JUNCTION 10600 SOUTH**	**NA**	**NA**
	1.73	1.96	0.23	*	BEGIN CONSTRUCTED	1,480	1,440
	1.96	3.89	1.93		JUNCTION 9000 SOUTH - SR 48 VIA 700 WEST	10,055	9,800
	3.90	4.40	0.50	*	7200 SOUTH STREET VIA 700 WEST	8,555	8,335
	4.40	4.65	0.25		NORTH INCORPORATED LIMITS MIDVALE VIA 700 WEST	9,345	9,105
	4.65	6.16	1.51		6400 SOUTH STREET VIA 700 WEST	13,230	12,890
	6.16	6.69	0.53		5300 SOUTH STREET	22,335	21,765
	6.69	7.12	0.43		VINE STREET	23,060	22,470
	7.12	7.62	0.50		4800 SOUTH	13,170	12,835
	7.62	8.67	1.05		JUNCTION 4500 SOUTH - 3720 SOUTH VIA 700 WEST	9,965	9,710

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	8.67	9.37	0.70	*	JUNCTION 3720 SOUTH UNCONSTRUCTED	NA	NA
	9.37	9.62	0.25	*	BEGIN CONSTRUCTED	595	580
	9.62	11.40	1.78		JUNCTION 3300 SOUTH STREET VIA 900 WEST	16,790	16,360
	11.40	11.92	0.52		2100 SOUTH VIA 900 WEST STREET IN SALT LAKE CITY	20,380	19,860
	11.92	12.39	0.47		1700 SOUTH VIA 900 WEST STREET IN SALT LAKE CITY	20,380	19,860
	12.39	13.17	0.78		CALIFORNIA AVENUE VIA 900 WEST IN SALT LAKE CITY	16,820	16,390
	13.17	13.77	0.60		800 SOUTH STREET VIA 900 WEST IN SALT LAKE CITY	18,515	18,045
1015	13.77	14.51	0.74		400 SOUTH STREET VIA 900 WEST	16,065	15,655
	14.51	15.26	0.75		NORTH TEMPLE STREET IN SALT LAKE CITY	13,125	12,790
	15.26	15.86	0.60		600 NORTH STREET - 1000 NORTH STREET VIA 900 WEST	13,665	13,315
1016	**0.00**	**0.69**	**0.69**	*	**JUNCTION 2000 EAST**	**23,445**	**22,600**
	0.69	2.31	1.62		2425 EAST VIA 7800 SOUTH - WASATCH BOULEVARD	11,415	11,005
1017	**0.00**	**0.82**	**0.82**	*	**5900 SOUTH FAU 1022 VIA 300 WEST**	**5,330**	**5,195**
	0.82	1.71	0.89		5300 SOUTH SR 173 VIA 300 WEST	7,575	7,380
	1.71	2.21	0.50		4800 SOUTH FAU 1026 VIA 300 WEST	5,460	5,320
	2.21	3.14	0.93		4500 SOUTH SR 266 - 3900 SOUTH	10,425	10,160
	3.15	4.18	1.03		JUNCTION 3900 SOUTH	8,320	8,105
	4.18	5.03	0.85		3300 SOUTH VIA 300 WEST	16,230	15,645
	5.03	5.89	0.86		2700 SOUTH IN SOUTH SALT LAKE VIA 300 WEST	16,190	15,605
	5.89	6.44	0.55		2100 SOUTH IN SOUTH SALT LAKE	16,835	16,540
	6.44	7.00	0.56		1700 SOUTH IN SALT LAKE CITY VIA 300 WEST	15,495	15,495
	7.00	7.71	0.71		1300 SOUTH	12,285	13,865
	7.71	8.16	0.45		800 SOUTH STREET VIA 300 WEST	17,010	17,905
	8.16	8.31	0.15		500 SOUTH STREET - 400 SOUTH STREET	21,290	21,290
1018	**0.00**	**1.30**	**1.30**	*	**STATE STREET**	**21,095**	**20,335**
	1.30	1.67	0.37		900 EAST VIA 7200 SOUTH	29,945	28,870

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.67	1.97	0.30		UNION PARK AVENUE 1100 EAST VIA 7200 SOUTH	25,050	24,150
	1.97	3.06	1.09		1300 EAST STREET	21,960	21,170
	3.06	4.07	1.01		JUNCTION 2000 EAST VIA 7000 SOUTH	24,825	23,930
	4.07	4.53	0.46		2700 EAST VIA 7000 SOUTH STREET	13,620	13,130
	4.53	5.49	0.96		3050 EAST - WASATCH BOULEVARD	9,865	9,510
1019	**0.00**	**1.74**	**1.74**	*	**JUNCTION 6400 SOUTH STREET VIA RIVERSIDE DRIVE**	**1,155**	**1,125**
	1.74	2.73	0.99		JUNCTION 5400 SOUTH - JUNCTION 300 WEST	990	965
1020	**0.00**	**0.50**	**0.50**	*	**REDWOOD ROAD UNCONSTRUCTED**	**NA**	**NA**
	0.50	0.81	0.31	*	1300 WEST VIA 6400 SOUTH	15,470	15,075
	0.81	1.49	0.68		WEST INCORPORATED LIMITS MURRAY	15,470	15,075
	1.49	2.59	1.10		700 WEST STREET FAU 1015	18,260	17,800
	2.59	2.91	0.32		JUNCTION STATE STREET SR 89 VIA 6400 SOUTH	21,920	21,130
	2.91	3.50	0.59		JUNCTION 280 EAST ON / OFF RAMPS SR 215	15,640	15,075
	3.50	3.83	0.33		725 EAST	12,610	12,155
	3.83	4.42	0.59		900 EAST STREET SR 71 - 1300 EAST STREET	9,110	8,780
1022	**0.00**	**2.00**	**2.00**	*	**JUNCTION 5600 WEST VIA 6200 SOUTH STREET**	**17,060**	**16,445**
	2.00	3.50	1.50		4000 WEST STREET	22,420	21,615
	3.50	4.51	1.01		2700 WEST STREET - REDWOOD ROAD VIA 6200 SOUTH	22,230	21,430
	4.52	5.02	0.50	*	REDWOOD ROAD - 1300 WEST STREET	11,575	11,280
	5.02	6.14	1.12	*	JUNCTION 700 WEST - STATE STREET	7,385	7,195
	6.14	7.35	1.21	*	STATE STREET	12,730	14,515
	7.35	7.98	0.63		900 EAST	11,425	14,300
	7.98	9.12	1.14		1300 EAST	11,230	12,620
	9.12	10.33	1.21		VAN WINKLE EXPRESSWAY VIA 6100 SOUTH	12,455	12,135
	10.33	10.44	0.11		KNUDSEN CORNER VIA 6200 SOUTH - FAI 215	13,360	12,880
1023	**0.00**	**0.66**	**0.66**	*	**JUNCTION ORCHARD DRIVE**	**2,680**	**2,750**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.66	1.29	0.63		JUNCTION SR 89	8,735	8,960
	1.29	2.03	0.74		FIVE POINTS 1500 SOUTH	11,090	11,090
	2.03	2.38	0.35		500 SOUTH VIA MAIN STREET	12,165	11,855
	2.38	2.67	0.29		CENTER STREET VIA MAIN STREET - 400 NORTH VIA MAIN	12,165	11,855
1024	**0.00**	**0.78**	**0.78**	*	**STATE STREET SR 89**	**13,470**	**12,985**
	0.78	1.26	0.48		VINE STREET IN MURRAY VIA 5300 SOUTH	16,350	15,760
	1.26	1.80	0.54		5600 SOUTH VIA VINE - 900 EAST	8,215	8,005
1026	**0.00**	**2.70**	**2.70**	*	**JUNCTION REDWOOD ROAD**	**10,080**	**9,720**
	2.70	3.92	1.22		JUNCTION STATE STREET - SR 71 VANWINKLE EXPRESSWAY	9,390	9,050
	3.92	4.37	0.44	*	JUNCTION SR 152 - 1300 EAST VIA 4800 SOUTH STREET	12,125	11,690
	4.37	5.20	0.84		1300 EAST STREET	13,425	12,940
	5.20	6.03	0.83		HIGHLAND DRIVE VIA 4800 SOUTH - 2300 EAST	20,450	19,715
1027	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 89**	**8,465**	**8,250**
	0.62	2.28	1.66		NORTH INCORPORATED LIMITS NORTH SALT LAKE	13,400	12,915
	2.28	2.47	0.19		JUNCTION 2600 SOUTH STREET FAU 1074 VIA ORCHARD DRIVE	11,285	10,880
	2.47	3.39	0.92		SOUTH INCORPORATED LIMITS BOUNTIFUL	11,490	11,075
	3.39	3.81	0.42		1500 SOUTH STREET	13,005	12,535
	3.81	4.06	0.25		MILL STREET	17,965	17,325
	4.06	4.71	0.65		500 SOUTH STREET	10,865	10,475
	4.71	5.54	0.83		400 NORTH STREET VIA 400 EAST	14,710	13,620
	5.54	5.59	0.05		NORTH INCORPORATED LIMITS BOUNTIFUL	11,710	10,160
	5.59	6.05	0.46		PAGES LANE 1000 SOUTH STREET	10,055	9,310
	6.05	7.17	1.12		PORTER LANE 400 SOUTH STREET	9,065	8,835
	7.17	7.42	0.25		CHASE LANE 1000 NORTH STREET - SR 106	9,065	8,835
1028	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5600 WEST VIA 4700 SOUTH**	**9,645**	**9,465**
	1.00	2.01	1.01		4800 WEST	24,965	24,500

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.01	2.24	0.23		4000 WEST	24,965	24,500
	2.24	2.52	0.28		JUNCTION BANGERTER HIGHWAY	30,800	30,250
	2.52	3.02	0.50		3600 WEST VIA 4700 SOUTH	37,790	37,090
	3.02	3.51	0.49		3200 WEST STREET	38,920	38,200
	3.51	3.74	0.23		2700 WEST EAST INC. LIMITS WEST VALLEY CITY - FAI 215	41,650	40,880
1029	**0.00**	**0.38**	**0.38**	*	**JUNCTION CENTER STREET FAU 1072**	**1,545**	**1,505**
	0.38	0.80	0.42		UNCONSTRUCTED	NA	NA
1029	0.80	1.28	0.48	*	CONSTRUCTED	1,120	1,090
	1.28	1.43	0.15		UNCONSTRUCTED	NA	NA
	1.43	1.81	0.38	*	CONSTRUCTED	1,260	1,225
	1.81	3.74	1.90		SOUTH INC. LIMITS BOUNTIFUL VIA DAVIS BOULEVARD	1,255	1,220
	3.74	4.41	0.70		500 SOUTH STREET - 400 NORTH STREET	1,235	1,200
1030	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 111 VIA 4100 SOUTH**	**4,205**	**4,050**
	0.50	1.50	1.00		JUNCTION 8000 WEST	5,035	4,850
	1.50	2.50	1.00		JUNCTION 7200 WEST	7,375	7,110
	2.50	3.51	1.01		6400 WEST	15,420	14,870
	3.51	4.51	1.00		5600 WEST	16,955	16,345
	4.51	5.50	0.99		4800 WEST VIA 4100 SOUTH	16,050	15,470
	5.50	5.66	0.16		4000 WEST	27,580	21,365
	5.66	7.00	1.34		BANGERTER HIGHWAY	27,580	21,365
	7.00	8.01	1.01		2700 WEST	28,275	26,180
	8.01	8.93	0.92		REDWOOD ROAD	30,135	29,050
	8.93	10.01	1.08		JORDAN RIVER BRIDGE EAST INC. LIMITS WEST VALLEY CITY	30,135	29,050
	10.01	10.72	0.71		300 WEST	29,655	28,590
	10.72	11.60	0.88		STATE STREET SR 89 VIA 3900 SOUTH	28,570	28,570
	11.60	11.90	0.30		700 EAST STREET SR 71 VIA 3900 SOUTH	24,170	25,895

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	11.90	12.51	0.61		900 EAST	23,660	28,295
	12.51	12.97	0.46		1300 EAST STREET SR 181 VIA 3900 SOUTH	20,615	19,875
	12.97	14.06	1.09		HIGHLAND DRIVE	15,000	14,460
	14.06	15.58	1.52		2300 EAST SR 195 - WASATCH BOULEVARD	12,615	12,570
1031	**0.00**	**0.29**	**0.29**	*	**400 SOUTH STREET**	**32,420**	**31,255**
	0.29	0.71	0.42		200 SOUTH - NORTH TEMPLE STREET VIA WEST TEMPLE	23,020	22,190
1034	**0.00**	**0.59**	**0.59**	*	**300 WEST**	**8,040**	**7,835**
1034	0.59	1.18	0.59		STATE STREET VIA 2700 SOUTH	10,555	7,925
	1.18	1.49	0.31		500 EAST STREET	13,500	11,780
	1.49	1.79	0.30		700 EAST STREET VIA 2700 SOUTH	12,495	12,175
	1.79	2.42	0.63		900 EAST STREET VIA 2700 SOUTH	12,710	12,385
	2.42	3.01	0.59		1300 EAST STREET	11,115	11,615
	3.01	3.44	0.43		1700 EAST STREET - 2000 EAST STREET	8,330	8,330
1035	**0.00**	**0.15**	**0.15**	*	**SOUTH TEMPLE**	**2,315**	**2,315**
	0.15	0.62	0.47		2ND AVENUE VIA B STREET	8,805	8,805
	0.62	0.86	0.24		8TH AVENUE VIA B STREET - 11TH AVENUE	2,135	2,135
1036	**0.00**	**0.87**	**0.87**	*	**JUNCTION 4500 SOUTH SR 266**	**6,400**	**6,400**
	0.87	1.72	0.85		3900 SOUTH STREET VIA MAIN STREET	12,600	12,750
	1.72	2.59	0.87		3300 SOUTH STREET VIA MAIN STREET	13,110	13,110
	2.59	3.48	0.89		2700 SOUTH STREET VIA MAIN STREET	14,480	14,110
	3.48	4.04	0.56		2100 SOUTH STREET VIA MAIN STREET	14,120	13,760
	4.04	4.59	0.55		1700 SOUTH STREET VIA MAIN STREET	13,140	12,805
	4.59	5.89	1.30		1300 SOUTH STREET VIA MAIN STREET	16,495	16,075
	5.89	6.49	0.60		400 SOUTH STREET VIA MAIN STREET	15,200	14,810
	6.49	6.94	0.45		SOUTH TEMPLE STREET - 200 NORTH STREET	14,415	14,045
1037	**0.00**	**0.87**	**0.87**	*	**JUNCTION 4500 SOUTH STREET**	**7,560**	**9,120**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1994 AADT
	0.87	1.75	0.88	3900 SOUTH STREET VIA 500 EAST	7,230	8,805
	1.75	2.12	0.37	3300 SOUTH STREET VIA 500 EAST	5,830	6,855
	2.12	2.63	0.51	SOUTH INCORPORATED LIMITS SALT LAKE CITY	5,645	6,640
	2.63	3.52	0.89	2700 SOUTH STREET VIA 500 EAST	5,245	6,170
	3.52	4.07	0.55	2100 SOUTH STREET VIA 500 EAST	6,585	7,745
	4.07	4.63	0.56	1700 SOUTH STREET VIA 500 EAST	6,390	7,635
	4.63	5.20	0.57	1300 SOUTH STREET VIA 500 EAST	7,060	8,820
1037	5.20	5.65	0.45	900 SOUTH STREET VIA 500 EAST	7,200	8,680
	5.65	5.95	0.30	600 SOUTH STREET VIA 500 EAST	8,805	10,205
	5.95	6.53	0.58	400 SOUTH STREET VIA 500 EAST	12,950	14,390
	6.53	7.00	0.47	SOUTH TEMPLE STREET VIA 500 EAST	10,475	11,025
	7.00	7.15	0.15	6TH AVENUE VIA E STREET	5,710	5,885
	7.15	7.39	0.24	8TH AVENUE VIA E STREET - 11TH AVENUE	3,190	3,190
1038	**0.00**	**0.59**	**0.59**	* **STATE STREET**	**21,455**	**20,685**
	0.59	0.89	0.30	500 EAST VIA 2100 SOUTH IN SALT LAKE CITY	23,295	22,455
	0.89	1.19	0.30	700 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	25,905	24,975
	1.19	1.49	0.30	900 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	25,295	24,385
	1.49	1.80	0.31	1100 EAST STREET VIA 2100 SOUTH STREET	23,350	22,510
	1.80	2.41	0.61	1300 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	30,150	29,065
	2.41	3.01	0.60	1700 EAST STREET VIA 2100 SOUTH STREET IN SALT LAKE CITY	21,135	20,375
	3.01	3.35	0.34	2100 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	17,475	16,845
	3.35	4.43	1.08	2300 EAST - JUNCTION SR 186 VIA PARLEYS WAY	12,255	11,580
1039	**0.00**	**1.25**	**1.25**	* **JUNCTION 6400 SOUTH - 5600 SOUTH VIA 280 EAST**	**11,140**	**11,065**
1040	**0.00**	**1.00**	**1.00**	* **JUNCTION 5600 WEST - 4800 WEST UNCONSTRUCTED**	**NA**	**NA**
	1.00	1.31	0.31	* JUNCTION 4800 WEST (PROPOSED)	NA	NA
	1.31	3.03	1.72	* BEGIN CONSTRUCTED PORTION	1,565	1,505

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	3.03	3.58	0.55		UNCONSTRUCTED - 2700 WEST	NA	NA
	3.58	4.57	0.99	*	2700 WEST STREET	10,495	10,225
	4.57	5.73	1.16		REDWOOD ROAD	12,085	11,650
	5.73	6.63	0.90		900 WEST STREET VIA 1700 SOUTH STREET	12,455	12,005
	6.63	7.23	0.60		300 WEST VIA 1700 SOUTH STREET	14,755	14,225
	7.23	7.82	0.59		STATE STREET VIA 1700 SOUTH STREET	12,325	11,880
	7.82	8.13	0.31		500 EAST STREET 1700 SOUTH STREET	11,235	10,830
1040	8.13	8.43	0.30		700 EAST STREET VIA 1700 SOUTH STREET	14,530	14,005
	8.43	8.72	0.29		900 EAST STREET VIA 1700 SOUTH STREET	10,270	9,900
	8.72	9.04	0.32		1100 EAST STREET VIA 1700 SOUTH STREET	8,305	8,005
	9.04	9.65	0.61		1300 EAST STREET VIA 1700 SOUTH STREET	7,570	7,375
	9.65	10.25	0.60		1700 EAST STREET VIA 1700 SOUTH STREET	6,555	6,385
	10.25	10.56	0.31		2100 EAST STREET VIA 1700 SOUTH STREET	7,565	7,370
	10.56	10.80	0.24		2300 EAST STREET SR 195 - FOOTHILL BOULEVARD	6,780	6,605
1041	**0.00**	**0.29**	**0.29**	*	**400 SOUTH STREET**	**35,200**	**33,935**
	0.29	0.57	0.28		200 SOUTH VIA 700 EAST IN SALT LAKE CITY	23,195	22,740
	0.57	1.03	0.46		SOUTH TEMPLE VIA 700 EAST	8,255	8,095
	1.03	1.42	0.39		6TH AVENUE VIA I STREET - 11TH AVENUE	3,620	3,525
1042	**2.00**	**3.00**	**1.00**	*	**5600 WEST VIA 1300 SOUTH**	**770**	**725**
	3.00	5.32	2.32		4800 WEST UNCONSTRUCTED	NA	NA
	5.32	5.49	0.17	*	BEGIN CONSTRUCTED	16,375	16,190
	5.49	5.97	0.48		2700 WEST IN SALT LAKE CITY	16,475	15,880
	5.97	6.50	0.53		JUNCTION FAI 215 INTERCHANGE	18,030	17,380
	6.50	7.65	1.15		REDWOOD ROAD VIA CALIFORNIA AVENUE	25,625	24,705
	7.65	8.32	0.67		900 WEST STREET VIA CALIFORNIA AVENUE	22,435	21,630
	8.32	8.56	0.24		JUNCTION FAI 15 VIA 1300 SOUTH STREET	18,145	17,490

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	8.56	9.16	0.60		300 WEST VIA 1300 SOUTH STREET	19,300	18,605
	9.16	9.76	0.60		STATE STREET VIA 1300 SOUTH STREET	15,690	15,125
	9.76	10.07	0.31	*	500 EAST VIA 1300 SOUTH STREET	11,225	14,805
	10.07	10.38	0.31		700 EAST VIA 1300 SOUTH STREET	11,265	10,815
	10.38	10.68	0.30		900 EAST VIA 1300 SOUTH STREET	10,760	10,370
	10.68	10.97	0.29		1100 EAST VIA 1300 SOUTH STREET	9,780	9,425
	10.97	11.59	0.62		1300 EAST VIA 1300 SOUTH STREET	7,975	7,525
1042	11.59	12.19	0.60		1700 EAST VIA 1300 SOUTH STREET	7,660	7,000
	12.19	12.38	0.19		2100 EAST - FOOTHILL BOULEVARD SR 186	8,050	7,760
1043	**0.00**	**0.58**	**0.58**	*	**JUNCTION VAN WINKLE EXPRESSWAY VIA 900 EAST**	**16,390**	**19,890**
	0.58	1.47	0.89		4500 SOUTH STREET VIA 900 EAST	13,745	17,520
	1.47	2.35	0.88		3900 SOUTH VIA 900 EAST	13,745	17,520
	2.35	2.73	0.38		3300 SOUTH STREET VIA 900 EAST	11,675	12,975
	2.73	3.23	0.50		SOUTH INCORPORATED LIMITS OF SALT LAKE CITY	12,150	12,150
	3.23	4.11	0.88		2700 SOUTH VIA 900 EAST	12,050	12,050
	4.11	4.67	0.56		2100 SOUTH STREET VIA 900 EAST	12,050	12,050
	4.67	5.21	0.54		1700 SOUTH VIA 900 EAST	12,460	12,300
	5.21	5.78	0.57		1300 SOUTH STREET VIA 900 EAST	15,000	15,400
	5.78	6.53	0.75		900 SOUTH VIA 900 EAST	14,800	15,255
	6.53	6.83	0.30		400 SOUTH STREET VIA 900 EAST	18,435	20,485
	6.83	7.13	0.30		200 SOUTH STREET - SOUTH TEMPLE VIA 900 EAST	10,680	11,770
1044	**0.00**	**2.55**	**2.55**	*	**JUNCTION 5600 WEST UNCONSTRUCTED**	**NA**	**NA**
	2.55	4.59	2.04	*	BEGIN CONSTRUCTED	3,865	3,725
	4.59	5.76	1.17		REDWOOD ROAD	12,450	12,130
	5.76	6.66	0.90		900 WEST VIA INDIANA AVENUE	11,395	11,105
	6.66	6.96	0.30		300 WEST VIA 800 SOUTH IN SALT LAKE CITY	15,750	15,350

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	6.96	7.26	0.30		WEST TEMPLE 800 SOUTH IN SALT LAKE CITY	15,660	15,095
	7.26	7.87	0.61		STATE STREET VIA 800 SOUTH IN SALT LAKE CITY	13,485	13,000
	7.87	8.16	0.29		500 EAST STREET VIA 800 SOUTH IN SALT LAKE CITY	14,940	14,400
	8.16	8.47	0.31		700 EAST VIA 800 SOUTH VIA 800 SOUTH IN SALT LAKE CITY	17,000	16,390
	8.47	9.06	0.59		900 EAST STREET VIA 800 SOUTH IN SALT LAKE CITY	15,340	14,790
	9.06	9.54	0.48		1300 EAST VIA 800 SOUTH IN SALT LAKE CITY	15,130	14,585
	9.54	10.08	0.54		GUARDSMAN WAY VIA SUNNYSIDE AVENUE	16,640	16,040
1044	10.08	10.31	0.23		FOOTHILL BLVD APPROXIMATELY 1950 EAST	16,175	16,175
	10.31	11.92	1.61		2100 EAST VIA SUNNYSIDE AVENUE	14,615	15,455
	11.92	12.17	0.25		E. INC. LIMITS S.L.C. VIA EMIGRATION CANYON-S.L.URBANBNDRY	2,650	2,650
1045	**0.00**	**0.40**	**0.40**	*	**JUNCTION STATE STREET-400 NORTH**	**3,265**	**3,180**
1046	**0.00**	**0.59**	**0.59**	*	**STATE STREET**	**20,990**	**20,600**
	0.59	0.89	0.30		500 EAST VIA 600 SOUTH SALT LAKE CITY-700 EAST	15,775	15,480
	1.78	2.07	0.29		700 EAST STREET	13,965	13,705
	2.07	2.67	0.60		500 EAST VIA 500 SOUTH-STATE STREET	14,705	14,430
1047	**3.50**	**3.75**	**0.25**	*	**12400 SOUTH VIA 1300 EAST**	**9,135**	**8,810**
	3.75	4.81	1.06		DRAPER PARKWAY VIA 1300 EAST	11,670	11,250
	4.81	5.30	0.49		11400 SOUTH VIA 1300 EAST	16,650	15,110
	5.30	5.80	0.50		11000 SOUTH VIA 1300 EAST	20,610	20,690
	5.80	7.29	1.49		JUNCTION 10600 SOUTH VIA 1300 EAST	33,815	34,820
	7.29	8.29	1.00		9400 SOUTH VIA 1300 EAST	37,420	36,075
	8.29	8.92	0.63		8600 SOUTH STREET IN SANDY	40,450	43,500
	8.92	9.29	0.37		NORTH INCORPORATED LIMITS SANDY VIA 1300 EAST	40,690	46,000
	9.29	10.31	1.02		7800 SOUTH STREET VIA 1300 EAST	44,235	47,565
	10.31	10.61	0.30		UNION PARKWAY VIA 1300 EAST	34,015	34,015

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	10.61	10.98	0.37		7000 SOUTH VIA 1300 EAST	24,275	23,400
	10.98	11.59	0.61		JUNCTION 6400 SOUTH FAU 1020	24,065	23,200
	11.59	12.22	0.63		6100 SOUTH STREET FAU 1022 VIA 1300 EAST	19,740	21,000
	12.22	12.86	0.64		5600 SOUTH STREET-VAN WINKLE SR 152	19,740	21,000
	12.87	13.30	0.43		500 SOUTH STREET VIA 1300 EAST	21,525	22,860
	13.30	13.59	0.29		200 SOUTH VIA 1300 EAST	11,910	11,480
	13.59	14.19	0.60		SOUTH TEMPLE-BONNEVILLE BOULEVARD VIA VIRGINIA	7,525	7,330
1048	**0.00**	**0.07**	**0.07**	*	**1300 EAST-UNIVERSITY AVENUE**	**21,655**	**21,105**
1049	**0.00**	**0.25**	**0.25**	*	**JUNCTION 12300 SOUTH FAU 1004**	**3,295**	**3,295**
	0.25	1.15	0.90		BEGIN UNCONSTRUCTED PORTION	NA	NA
	1.15	2.21	1.06	*	BEGIN CONSTRUCTED PORTION	4,580	4,495
	2.21	2.30	0.09		JUNCTION FAU 1008 10600 SOUTH	4,580	4,495
	2.30	3.90	1.60		BEGIN UNCONSTRUCTED PORTION	NA	NA
	3.90	4.54	0.64	*	9400 SOUTH SANDY	18,365	18,025
	4.54	6.37	1.83		NEW CASTLE DRIVE 8890 SOUTH VIA HIGHLAND DRIVE	21,925	21,520
	6.37	6.92	0.55		7800 SOUTH VIA 2000 EAST	22,975	23,330
	6.92	7.50	0.58		7000 SOUTH- FAI 215 EASTBOUND ON & OFF RAMPS	43,580	42,775
	7.51	8.14	0.63	*	JUNCTION SR 152 AND 6100 SOUTH	19,810	19,095
	8.14	9.34	1.20		5600 SOUTH STREET VIA HIGHLAND DRIVE	21,045	20,820
	9.34	9.93	0.59		JUNCTION FAU 1026 4800 SOUTH VIA HIGHLAND DRIVE	36,725	35,405
	9.93	10.82	0.89		4500 SOUTH STREET VIA HIGHLAND DRIVE	18,830	20,235
	10.82	11.75	0.93		3900 SOUTH STREET VIA HIGHLAND DRIVE	20,325	19,595
	11.75	12.20	0.45		3300 SOUTH STREET VIA HIGHLAND DRIVE	19,530	18,825
	12.20	12.52	0.32		SOUTH INCORPORATED LIMITS SALT LAKE CITY	19,530	18,825
	12.52	13.57	1.05		JUNCTION SR 181 VIA 1100 EAST	22,930	22,345
	13.57	14.13	0.56		2100 SOUTH - 1700 SOUTH STREET VIA 1100 EAST	14,255	13,890

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
1050	**0.00**	**2.05**	**2.05**	*	**JUNCTION 5600 WEST**	**900**	**845**
	2.05	3.89	1.84		JUNCTION BANGERTER HIGHWAY	4,120	3,885
	3.89	4.69	0.80		2100 WEST STREET UNCONSTRUCTED	NA	NA
	4.69	5.82	1.13	*	REDWOOD ROAD	9,870	9,515
	5.82	6.73	0.91		900 WEST VIA 400 SOUTH STREET-300 WEST	16,390	15,800
1051	**0.00**	**0.53**	**0.53**	*	**SUNNYSIDE AVENUE - JUNCTION 500 SOUTH FAU 1050**	**10,835**	**10,445**
1052	**0.00**	**0.26**	**0.26**	*	**JUNCTION SR 186**	**10,335**	**10,070**
	0.26	0.56	0.30		ARAPEEN DRIVE	5,135	5,005
1052	0.56	0.69	0.13		CHIPETA WAY-UNCONSTRUCTED	NA	NA
1053	**0.00**	**1.83**	**1.83**	*	**JUNCTION 3900 SOUTH**	**9,535**	**9,290**
	1.83	2.29	0.46		2700 SOUTH STREET	9,780	9,530
	2.29	2.41	0.12		PARLEYS BOULEVARD VIA 2000 EAST	5,870	5,720
	2.41	2.86	0.45		2100 EAST VIA PARKWAY AVENUE	6,945	6,765
	2.86	3.42	0.56		2100 SOUTH	8,365	8,150
	3.42	3.97	0.55		1700 SOUTH VIA 2100 EAST STREET	9,780	9,530
	3.97	4.22	0.25		1300 SOUTH - FOOTHILL BOULEVARD VIA 2100 EAST	10,100	9,840
1054	**0.00**	**0.59**	**0.59**	*	**STATE STREET VIA 100 SOUTH IN SALT LAKE CITY**	**10,810**	**12,355**
	0.59	0.89	0.30		500 EAST VIA 100 SOUTH IN SALT LAKE CITY	10,370	12,645
	0.89	1.19	0.30		700 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	10,570	12,260
	1.19	1.79	0.60		900 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	10,570	12,260
	1.79	1.87	0.08		1300 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	12,475	12,475
	1.87	2.15	0.28		UNIVERSITY STREET VIA 100 SOUTH -SR 282 IN SALT LAKE CITY	10,025	9,770
1055	**0.00**	**1.59**	**1.59**	*	**6200 SOUTH KNUDSEN CORNER**	**11,690**	**11,270**
	1.59	2.31	0.72		CASTO LANE	21,415	20,645
	2.31	2.70	0.39		HOLLADAY - 4500 SOUTH VIA 2300 EAST	18,340	17,680
1056	**0.00**	**0.44**	**0.44**	*	**300 WEST STREET**	**14,000**	**17,500**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.44	0.58	0.14		MAIN STREET VIA SOUTH TEMPLE	14,875	19,865
	0.58	1.19	0.61		STATE STREET VIA SOUTH TEMPLE	18,985	24,595
	1.19	1.49	0.30		500 EAST STREET VIA SOUTH TEMPLE	24,630	29,060
	1.49	1.79	0.30		700 EAST VIA SOUTH TEMPLE	18,750	20,835
	1.79	2.39	0.60		900 EAST VIA SOUTH TEMPLE	17,230	18,135
	2.39	2.47	0.08		1300 EAST-VIRGINIA STREET VIA SOUTH TEMPLE	9,670	9,970
1058	**0.00**	**0.05**	**0.05**	*	**STATE STREET**	**22,890**	**22,305**
	0.05	0.56	0.50		CANYON ROAD	11,445	11,150
1058	0.56	0.87	0.32		E STREET VIA 2ND AVENUE-I STREET VIA 2ND AVENUE	10,005	9,750
	0.87	1.88	1.01	*	I STREET VIA 2ND AVENUE-VIRGINIA STREET	8,930	8,700
	1.88	2.89	1.01	*	VIRGINIA STREET VIA 3RD AVENUE	5,550	5,405
	2.89	3.19	0.31		I STREET VIA 3RD AVENUE	7,945	7,740
	3.19	3.77	0.57		E STREET VIA 3RD AVENUE - 2ND AVENUE	10,325	10,060
1060	**0.00**	**0.89**	**0.89**	*	**JUNCTION 900 WEST**	**7,175**	**6,990**
	0.89	1.19	0.30		300 WEST STREET VIA 200 SOUTH IN SALT LAKE CITY	13,450	13,450
	1.19	1.34	0.15		WEST TEMPLE VIA 200 SOUTH IN SALT LAKE CITY	16,000	17,775
	1.34	1.49	0.15		MAIN STREET VIA 200 SOUTH IN SALT LAKE CITY	16,510	18,975
	1.49	2.09	0.60		STATE STREET VIA 200 SOUTH IN SALT LAKE CITY	14,560	19,385
	2.09	2.39	0.30		500 EAST STREET VIA 200 SOUTH IN SALT LAKE CITY	12,010	14,130
	2.39	2.69	0.30		700 EAST VIA 200 SOUTH-900 EAST STREET	9,000	9,640
1061	**0.00**	**1.77**	**1.77**		**JCT. FAU 1073 PROPROSED-BOUNTIFUL BLVD**		
				*	**UNCONSTRUCTED**	**NA**	**NA**
	1.77	2.28	0.93	*	BEGIN CONSTRUCTED	1,190	1,160
	2.28	3.84	1.56		CANYON ESTATES	5,285	5,150
	3.84	4.23	0.39		BOUNTIFUL GOLF COURSE-MUELLER PARK ROAD	3,205	3,120
1062	**0.00**	**0.44**	**0.44**	*	**900 WEST STREET**	**3,185**	**3,100**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.44	0.88	0.44		600 WEST VIA 300 NORTH-300 WEST STREET	2,255	2,195
1063	**0.00**	**1.45**	**1.45**	*	**REDWOOD ROAD VIA 1500 SOUTH**	**2,730**	**2,660**
	1.45	1.98	0.53		JUNCTION 800 WEST FAU 1078	5,195	5,060
	1.98	2.20	0.22		JUNCTION SR 89 500 WEST STREET	5,790	5,640
	2.20	2.31	0.11		JUNCTION SR 106 VIA 1500 SOUTH	7,060	6,880
	2.31	2.86	0.55		JUNCTION MAIN STREET FAU 1023-ORCHARD DRIVE	6,100	5,945
	2.87	3.35	0.48		JUNCTION ORCHARD DRIVE VIA 1800 SOUTH	5,945	5,730
	3.35	4.50	1.15		JUNCTION DAVIS BOULEVARD	7,615	7,340
	4.50	5.23	0.73		JUNCTION BOUNTIFUL BOULEVARD-EAST URBAN BOUNDARY	3,140	3,060
1064	**0.89**	**1.10**	**0.21**	*	**2200 WEST VIA 700 NORTH**	**7,420**	**7,230**
	1.10	1.63	0.53		FAI 215 STRUCTURE	11,260	10,855
	1.63	2.24	0.61		REDWOOD ROAD VIA 700 NORTH	18,985	18,300
	2.24	2.85	0.61		1300 WEST VIA 600 NORTH	15,400	14,845
	2.85	3.04	0.19		800 WEST VIA 600 NORTH - FAI 15	17,690	17,055
	3.59	3.84	0.25	*	VICTORY ROAD - EAST CAPITAL STREET	3,830	3,730
	5.34	5.56	0.22	*	MOUTH OF CITY CREEK CANYON	390	380
	5.56	5.88	0.32		E STREET VIA 11TH AVENUE	2,680	2,610
	5.88	6.95	1.07		I STREET VIA 11TH AVE - VIRGINIA STREET	3,030	2,950
	7.88	8.45	0.57	*	JUNCTION FAU 1081	2,980	2,900
	8.45	8.86	0.41		BEGIN UNCONSTRUCTED-FAU 1054	NA	NA
1065	**0.00**	**0.10**	**0.10**	*	**JUNCTION SR 186-NORTH TEMPLE STREET**	**5,650**	**5,505**
	0.10	0.99	0.89	*	NORTH TEMPLE STREET	7,420	7,230
	0.99	2.92	1.93		700 NORTH STREET	1,670	1,625
	2.92	4.91	1.99		2100 NORTH STREET VIA 2200 WEST	835	765
	4.91	5.36	0.45		BEGIN UNCONSTRUCTED	NA	NA
1066	**0.00**	**1.16**	**1.16**	*	**REDWOOD ROAD - 900 WEST VIA 1000 NORTH SALT LAKE CITY**	**8,755**	**8,530**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
1067	**0.00**	**0.75**	**0.75**	*	**2200 WEST ST-REDWOOD ROAD VIA 1800 NORTH**	**835**	**385**
1068	**0.00**	**0.99**	**0.99**		**JUNCTION 4000 WEST STREET FAU 1005**	**3,610**	**3,565**
	0.99	1.92	0.93		3200 WEST	3,610	3,565
	1.92	2.72	0.80		FAI 215 UNCONSTRUCTED	NA	NA
	2.72	3.55	0.83	*	REDWOOD ROAD VIA 2400 NORTH-FAI 15	3,245	3,630
1069	**0.00**	**0.49**	**0.49**	*	**JUNCTION SR 89**	**1,245**	**1,210**
	0.49	1.55	1.06		BEGIN UNCONSTRUCTED-FAU 1061	NA	NA
1070	**0.00**	**0.25**	**0.25**	*	**JUNCTION FAU 1006 UNCONSTRUCTED**	**NA**	**NA**
	0.25	0.75	0.50	*	BEGIN CONSTRUCTED - FAI 15	5,670	5,465
1071	**0.43**	**1.42**	**0.99**	*	**ORCHARD DRIVE**	**8,320**	**8,105**
	1.42	1.88	0.46		BOUNTIFUL EAST INC. LIMITS - BOUNTIFUL BOULEVARD	8,320	8,105
1072	**0.00**	**0.83**	**0.83**	*	**REDWOOD ROAD**	**5,130**	**4,590**
	0.83	1.11	0.28		JUNCTION FAI 15 VIA CENTER STREET	6,050	5,450
	1.11	1.36	0.25	*	JUNCTION SR 89 IN NORTH SALT LAKE	4,500	4,050
	1.36	1.56	0.20		JUNCTION ORCHARD DRIVE FAU 1027-DAVIS BOULEVARD	4,450	3,970
1073	**0.00**	**1.20**	**1.20**	*	**JUNCTION SR 89 - SALT LAKE COUNTY LINE UNCONSTRUCTED**	**NA**	**NA**
1074	**0.00**	**1.14**	**1.14**	*	**REDWOOD ROAD**	**2,165**	**2,085**
	1.14	1.40	0.26		NORTH INCORPORATED LIMITS NORTH SALT LAKE	2,850	2,745
	1.40	1.43	0.03		JUNCTION FAU 1078 AT 2600 SOUTH-JUNCTION SR 93	7,215	6,950
	1.55	1.75	0.20	*	JUNCTION SR 89	22,795	19,355
	1.75	2.11	0.36		EAST INC. LIMITS BOUNTIFUL - ORCHARD DRIVE FAU1027	13,735	13,685
1075	**0.00**	**0.73**	**0.73**	*	**JUNCTION 2700 SOUTH - PARLEYS CANYON BOULEVARD**	**3,415**	**3,325**
	0.73	1.22	0.49	*	JUNCTION 1700 EAST-2000 EAST STREET	2,790	2,715
1076	**0.00**	**0.25**	**0.25**	*	**JUNCTION SR 106 IN BOUNTIFUL VIA 500 SOUTH STREET**	**27,170**	**26,480**
	0.25	0.69	0.44		MAIN STREET	22,855	22,270
	0.69	1.37	0.68		ORCHARD DRIVE VIA 500 SOUTH-DAVIS BOULEVARD	14,075	13,720

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
1077	**0.00**	**0.50**	**0.50**	*	**JUNCTION 4800 SOUTH - 4500 SOUTH STREET**	**5,730**	**5,830**
1078	**0.00**	**0.27**	**0.27**	*	**WOODS CROSS INTERCHANGE**	**4,825**	**4,700**
	0.27	1.48	1.21		SOUTH INCORPORATED LIMITS WOODS CROSS	4,825	4,700
	1.48	1.51	0.03		SOUTH INCORPORATED LIMITS WEST BOUNTIFUL	5,420	5,280
	1.51	2.18	0.67		500 SOUTH IN WEST BOUNTIFUL VIA 800 WEST	3,285	3,200
	2.18	2.47	0.29		400 NORTH-FAI 15 VIA 400 NORTH	12,430	12,110
	2.47	2.89	0.42	*	MAIN STREET IN BOUNTIFUL	14,550	14,025
	2.89	3.60	0.71		ORCHARD DRIVE - DAVIS BOULEVARD VIA 400 NORTH STREET	7,330	7,140
1081	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 282-END OF ROUTE**	**4,000**	**3,895**
1082	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5400 SOUTH SR 173 VIA 3600 WEST**	**14,885**	**14,505**
	1.00	2.00	1.00		4700 SOUTH FAU 1029	15,385	14,990
	2.00	3.00	1.00		4100 SOUTH FAU 1030	15,865	15,460
	3.00	3.50	0.50		3500 SOUTH SR 171 VIA 3600 WEST	10,540	10,270
	3.50	4.00	0.50		3100 SOUTH FAU 1096 VIA 3600 WEST	11,235	10,950
	4.00	4.75	0.75		2700 SOUTH FAU 1034	12,155	11,845
	4.75	4.98	0.23		URBANIZED BOUNDARY	12,155	11,845
	4.98	5.43	0.45		2100 SOUTH FRONTAGE ROAD VIA FRONTAGE ROAD	20,210	19,060
	5.43	5.89	0.46		3200 WEST FAU 1087 - 2700 WEST	5,885	5,550
1083	**0.00**	**0.17**	**0.17**	*	**JUNCTION 3600 WEST STREET**	**620**	**595**
	0.17	0.88	0.71		BEGIN UNCONSTRUCTED PORTION	NA	NA
	0.88	2.08	1.20	*	BEGIN CONSTRUCTED - REDWOOD ROAD	1,850	1,780
1084	**0.00**	**0.15**	**0.15**	*	**JCT. PROPROSED BANGERTER HIGHWAY VIA 14400 SOUTH**	**2,175**	**1,615**
	0.15	1.09	0.94		FAU 1009 2700 WEST - SR 68	2,500	2,000
1085	**0.00**	**4.80**	**4.80**	*	**BANGERTER HIGHWAY UNCONSTRUCTED**	**NA**	**NA**
	4.80	5.50	0.70	*	BEGIN CONSTRUCTED VIA 9800 SOUTH	6,500	6,190
	5.50	6.68	1.18		700 EAST VIA SEGO LILY DRIVE	6,500	6,190

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	6.68	7.68	1.00		1300 EAST UNCONSTRUCTED	NA	NA
1086	**0.00**	**1.36**	**1.36**	*	**JUNCTION 2000 EAST-PROPOSED WASATCH DRIVE**	**NA**	**NA**
	1.36	2.81	1.10	*	BEGIN CONSTRUCTED FAU 1086	1,510	1,385
	2.81	4.01	1.20		JUNCTION SR 209-SR 210	9,770	8,950
	3.60	3.95	0.35	*	UNCONSTRUCTED	NA	NA
1087	**0.00**	**0.66**	**0.66**	*	**JUNCTION 9000 SOUTH VIA 3200 WEST**	**NA**	**NA**
	0.66	1.50	0.84	*	BEGIN CONSTRUCTED	9,435	9,195
	1.50	2.50	1.00		JUNCTION 7800 SOUTH FAU 1014	12,095	11,785
	2.50	3.51	1.01		JUNCTION 7000 SOUTH FAU 1092	11,135	10,850
1087	3.51	4.51	1.00		JUNCTION 6200 SOUTH FAU 1022	11,065	10,780
	4.51	5.51	1.00		JUNCTION SR 173 5300 SOUTH	12,015	11,710
	5.51	6.51	1.00		JUNCTION 4700 SOUTH FAU 1028	13,180	12,845
	6.51	7.51	1.00		JUNCTION 4100 SOUTH FAU 1030	11,310	11,000
	7.51	8.00	0.49		JUNCTION 3500 SOUTH SR 171	10,385	10,120
	8.00	9.53	1.25		JUNCTION 3100 SOUTH FAU 1096	11,730	11,430
	9.25	9.53	0.28		URBAN BOUNDARY	11,730	11,430
	9.53	9.85	0.32		JUNCTION 2100 SOUTH VIA 3200 WEST	5,295	4,990
	9.85	10.50	0.62		BEGIN UNCONSTRUCTED	NA	NA
	10.50	10.85	0.50	*	BEGIN CONSTRUCTED	5,000	4,715
	10.85	11.71	0.74		BEGIN UNCONSTRUCTED-500 SOUTH	NA	NA
1088	**0.18**	**1.12**	**0.94**	*	**STATE STREET**	**8,835**	**4,655**
	1.12	1.60	0.48		700 EAST STREET VIA 11400 SOUTH	11,500	9,430
	1.60	2.13	0.53		1000 EAST-1300 EAST	8,550	6,285
1089	**0.00**	**1.00**	**1.00**	*	**JUNCTION 4100 SOUTH VIA 7200 WEST**	**7,600**	**6,980**
	1.00	2.49	1.49		JUNCTION 3500 SOUTH SR 171	10,050	8,600
	6.02	6.39	0.37		JUNCTION FAI 80	430	415

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	6.39	6.64	0.25		UNCONSTRUCTED-PROPOSED FAU 1007	NA	NA
1090	**0.00**	**0.93**	**0.93**	*	**JUNCTION 9000 SOUTH VIA FRONTAGE ROAD**	**6,210**	**5,180**
	0.93	1.90	0.97		STATE STREET VIA 9400 SOUTH	23,475	22,630
	1.90	2.39	0.49		700 EAST - SR 209 SKI BYPASS ROAD	26,940	25,970
1091	**0.00**	**1.00**	**1.00**	*	**6200 SOUTH**	**11,200**	**11,200**
	1.01	2.23	1.22		5400 SOUTH	11,350	11,060
	2.23	3.25	1.00		JUNCTION 4700 SOUTH FAU 1028 VIA 4800 WEST	10,855	10,575
	3.25	4.25	1.00		JUNCTION 4100 SOUTH FAU 1030	12,765	12,440
	4.25	4.75	0.50		JUNCTION SR 171 3500 SO	5,290	5,155
1091	4.75	7.25	2.50		3100 SOUTH STREET UNCONSTRUCTED	5,290	5,155
	7.25	8.25	1.00	*	BEGIN CONSTRUCTED-700 SOUTH STREET	580	555
1092	**0.00**	**0.45**	**0.45**	*	**JUNCTION BANGERTER HIGHWAY VIA 7000 SOUTH**	**7,580**	**5,130**
	0.45	0.95	0.50		JUNCTION 3200 WEST FAU 1087	10,105	8,900
	0.95	1.95	1.00		JUNCTION 2700 WEST FAU 1009	12,235	11,795
	1.95	2.45	0.50		JUNCTION REDWOOD ROAD	11,470	11,055
	2.45	3.50	1.05		JUNCTION 1300 WEST UNCONSTRUCTED-SR 48	NA	NA
1093	**0.00**	**1.40**	**1.40**	*	**JUNCTION 1300 EAST VIA CREEK ROAD**	**9,960**	**9,705**
	1.40	3.12	1.72		HIGHLAND DRIVE FAU 1049	7,850	7,650
	3.12	3.77	0.65		DANISH ROAD - WASATCH BOULEVARD	4,445	4,330
1094	**0.00**	**1.01**	**1.01**	*	**STATE STREET VIA 100 NORTH**	**11,805**	**11,505**
	1.01	2.01	1.00		JUNCTION 700 EAST STREET VIA 8600 SOUTH	9,940	9,685
	2.01	3.23	1.22		JUNCTION 1300 EAST STREET - 2000 EAST STREET	9,885	9,630
1095	**0.00**	**0.75**	**0.75**	*	**JUNCTION 7600 SOUTH FAU 1016 BENGAL BOULEVARD**	**7,235**	**7,235**
	0.75	1.75	1.00		JUNCTION 7000 SOUTH - 6200 SOUTH STREET VIA 2300 EAST	8,595	8,595
1096	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5600 WEST SR 172 VIA 3100 SOUTH**	**3,600**	**3,505**
	1.00	2.01	1.01		JUNCTION 4800 WEST FAU 1091	10,740	10,465

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.01	2.38	0.37		JUNCTION 4000 WEST FAU 1093	11,600	11,305
	2.38	2.50	0.12		BANGERTER HIGHWAY	11,600	11,305
	2.50	3.00	0.50		3600 WEST STREET	11,600	11,305
	3.00	3.51	0.51		JUNCTION 3200 WEST FAU 1087 VIA 3100 SOUTH	10,160	9,900
	3.51	4.51	1.00		JUNCTION 2700 WEST FAU 1009	10,170	9,910
	4.51	4.78	0.27		JUNCTION SR 68 FAU 1011 REDWOOD ROAD	2,615	2,545
	4.78	5.08	0.30		UNCONSTRUCTED	NA	NA
	5.08	5.19	0.11	*	BEGIN CONSTRUCTED - 3300 SOUTH	2,600	2,530
1097	**0.00**	**0.12**	**0.12**	*	**12300 SOUTH - 12200 SOUTH VIA 900 EAST**	**4,320**	**4,210**
1097	0.12	1.30	1.18	*	JUNCTION 900 EAST VIA 12200 SOUTH	9,140	8,905
	1.30	2.30	1.00		JUNCTION 11400 SOUTH - 10600 SOUTH VIA 10TH EAST	12,180	11,870
1098	**0.00**	**0.40**	**0.40**	*	**1300 EAST STREET FAU 1047**	**46,675**	**45,000**
	0.40	0.70	0.30		FORT UNION BOULEVARD VIA UNION PARK AVENUE	52,370	50,490
	0.70	0.80	0.10		FAI 215 INTERCHANGE - 6400 SOUTH	17,165	16,545
1102	**7.44**	**7.67**	**0.23**	*	**200 EAST STREET - MAIN STREET VIA 400 SOUTH RICHFIELD**	**1,025**	**840**
1401	**2.95**	**3.58**	**0.63**	*	**SOUTHWEST URBAN BOUNDARY**	**880**	**230**
	3.58	3.83	0.25		BEGIN UNCONSTRUCTED PORTION JUNCTION SR 73	NA	NA
	3.83	4.35	0.52	*	UNCONSTRUCTED	NA	NA
	4.35	4.86	0.51	*	BEGIN CONSTRUCTION PORTION FAU 1401	395	505
	4.86	5.11	0.25	*	BEGIN UNCONSTRUCTED PORTION	NA	NA
	5.11	7.01	1.90	*	UNCONSTRUCTED	NA	NA
1403	**0.00**	**1.34**	**1.34**	*	**JUNCTION SR 89 - 9600 NORTH IN HIGHLAND**	**425**	**410**
1901	**0.00**	**0.96**	**0.96**	*	**JUNCTION SR 56 - NORTH URBAN BOUNDARY CEDAR CITY**	**2,190**	**2,110**
2001	**0.00**	**1.44**	**1.44**	*	**JUNCTION SR 126 - FAI 15 24TH STREET INTERCHANGE OGDEN**	**9,875**	**9,875**
	1.44	2.01	0.57	*	WASHINGTON BOULEVARD	9,205	10,690
	2.01	2.58	0.57		MONROE AVENUE VIA 24TH STREET-HARRISON BOULEVARD	8,470	8,470

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
2002	**0.00**	**1.06**	**1.06**	*	**GENTILE STREET**	**3,345**	**3,260**
	1.06	2.02	0.96		SOUTH INCORPORATED LIMITS LAYTON	3,345	3,260
	2.02	2.34	0.32		WEST INCORPORATED LIMITS KAYSVILLE-FAI 15 VIA 2ND NORTH	4,310	4,155
	2.34	3.74	1.40	*	JUNCTION SR 273	6,690	6,650
	3.74	3.86	0.12		EAST INCORPORATED LIMITS KAYSVILLE	4,250	4,220
	3.86	3.89	0.03		WEST INCORPORATED LIMITS FRUIT HEIGHTS - SR 89	5,000	4,975
2003	**0.00**	**2.75**	**2.75**	*	**OGDEN SOUTH URBAN BOUNDARY - 200 NORTH**	**2,205**	**2,145**
2004	**0.00**	**1.78**	**1.78**	*	**OGDEN WEST URBAN BOUNDARY LAYTON EAST INC. LIMITS**	**2,835**	**2,760**
	1.78	3.43	1.65		WEST INCORPORATED LIMITS LAYTON	8,030	7,825
2004	3.43	3.91	0.48		FLINT STREET-MAIN STREET SR 126 VIA GENTILE STREET	9,920	9,665
2005	**0.00**	**0.91**	**0.91**	*	**JUNCTION SR 273**	**13,525**	**13,040**
	0.91	1.22	0.31		NORTH INCORPORATED LIMITS KAYSVILLE	17,655	17,020
	1.22	1.82	0.60		SOUTH INCORPORATED LIMITS LAYTON - JUNCTION SR 126	22,545	21,735
2006	**0.00**	**0.83**	**0.83**	*	**JUNCTION SR 232 VIA GORDON AVENUE**	**14,950**	**13,410**
	0.83	1.25	0.42		FORT LANE - FAIRFIELD ROAD FAU 2061	12,750	11,915
2007	**0.00**	**2.04**	**2.04**	*	**GENTILE STREET FAU 2004 - SYRACUSE ROAD SR 108**	**3,885**	**3,785**
2008	**0.00**	**0.72**	**0.72**	*	**JUNCTION SR 232 HILL FIELD ROAD**	**14,345**	**10,430**
	0.72	2.48	1.76		JUNCTION FORT LANE STREET	7,730	6,720
	2.48	2.71	0.23	*	BEGIN CONSTRUCTED	3,015	2,905
	2.71	2.79	0.08		BEGIN UNCONSTRUCTED	NA	NA
	2.79	3.23	0.44	*	BEGIN CONSTRUCTED PORTION-SR 89	1,960	1,890
2010	**0.00**	**0.53**	**0.53**	*	**JUNCTION SR 126 COUNTY LINE CLEARFIELD**	**9,775**	**9,525**
	0.53	1.23	0.70		700 SOUTH VIA MAIN-SR 126 VIA 700 SOUTH	7,805	7,605
2015	**0.00**	**0.71**	**0.71**	*	**36TH STREET**	**5,885**	**5,735**
	0.71	1.72	1.01		31ST STREET VIA GRANT AVENUE IN OGDEN	5,775	5,625
	1.72	2.29	0.57		24TH STREET VIA GRANT IN OGDEN	4,515	4,400

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.29	3.19	0.90		20TH STREET OGDEN - 12TH STREET VIA GRANT AVENUE	2,930	1,680
	3.19	4.09	0.90		12TH STREET SR 39 VIA LINCOLN IN OGDEN	3,710	3,615
	4.09	4.67	0.58		20TH STREET VIA LINCOLN IN OGDEN	6,905	6,730
	4.67	5.67	1.00		24TH STREET SR 53 VIA LINCOLN AVENUE IN OGDEN	7,945	7,740
	5.67	6.53	0.86		31ST STREET VIA LINCOLN AVENUE - RIVERDALE ROAD	5,985	5,830
2017	**0.00**	**0.16**	**0.16**	*	**JUNCTION SR 235**	**19,570**	**18,865**
	0.16	0.68	0.52		2600 NORTH STREET IN NORTH OGDEN	12,490	14,030
	0.68	0.80	0.12		2880 NORTH STREET IN NORTH OGDEN UNCONSTRUCTED	NA	NA
	0.80	1.02	0.22	*	450 EAST STREET - 3100 NORTH	3,160	3,080
2021	**0.00**	**0.70**	**0.70**	*	**36TH STREET**	**2,200**	**2,420**
	0.70	1.72	1.02		31ST STREET VIA ADAMS AVENUE IN OGDEN	2,250	2,455
	1.72	2.29	0.57		24TH STREET - 20TH STREET VIA ADAMS AVENUE IN OGDEN	2,475	3,035
2022	**0.00**	**0.28**	**0.28**	*	**JUNCTION SR 126**	**6,830**	**6,655**
	0.28	0.78	0.50		EAST INCORPORATED LIMITS ROY	8,580	8,360
	0.78	1.72	0.94		WEST INC. LIMITS RIVERDALE - SR 26 RIVERDALE ROAD	9,160	8,925
2023	**0.00**	**0.70**	**0.70**	*	**36TH STREET VIA JEFFERSON AVENUE**	**2,775**	**2,895**
	0.70	1.72	1.02		31ST STREET VIA JEFFERSON AVENUE	1,795	2,180
	1.72	2.29	0.57		24TH ST- 20TH STREET VIA JEFFERSON AVENUE	1,675	1,835
2024	**0.00**	**0.89**	**0.89**	*	**JUNCTION SR 89 UNCONSTRUCTED**	**NA**	**NA**
	0.89	1.15	0.26		SOUTH INCORPORATED LIMITS OGDEN- SR 203 HARRISON BLVD	1,925	1,875
2025	**0.00**	**2.39**	**2.39**	*	**JUNCTION FAU 2005-SR 89 VIA MUTTON HOLLOW ROAD**	**3,230**	**3,145**
2026	**0.00**	**0.51**	**0.51**	*	**HARRISON BOULEVARD**	**5,855**	**5,705**
	0.51	0.86	0.35		SOUTH INCORPORATED LIMITS OGDEN-4600 SOUTH FAU 2035	4,455	4,455
2027	**0.00**	**0.40**	**0.40**	*	**JUNCTION FAU 1029**	**NA**	**NA**
	0.40	0.91	0.51	*	BEGIN CONSTRUCTED PORTION	3,115	3,035
	0.91	2.04	1.13		JUNCTION SR 89	3,495	3,405

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	2.04	2.33	0.29		45TH STREET	2,880	2,805
	2.33	2.68	0.35		42TH STREET	1,800	1,750
	2.68	3.10	0.42		39TH STREET	3,425	3,335
	3.10	3.78	0.68		36TH STREET	3,475	3,350
	3.78	3.94	0.17		31ST STREET VIA QUINCY AVENUE OGDEN	6,310	6,080
	3.94	4.87	0.92		30TH STREET VIA SULLIVAN ROAD	13,040	12,570
	4.87	5.45	0.58		24TH STREET VIA MONROE AVENUE	16,625	16,025
	5.45	5.67	0.22		20TH STREET VIA MONROE AVENUE	4,440	4,280
	5.67	5.85	0.18		END OF CONSTRUCTED SECTION	NA	NA
2027	5.85	6.49	0.64	*	BEGIN CONSTRUCTED SECTION	12,565	12,110
	6.49	6.80	0.31		JUNCTION SR 39 12TH STREET	15,265	14,715
	6.80	7.02	0.22		9TH STREET	9,500	9,155
	7.02	7.55	0.53		7TH STREET FAU 2040	6,540	6,305
	7.55	8.10	0.55		2ND STREET FAU 2042	6,210	5,985
	8.10	8.84	0.74		400 NORTH FAU 2044	5,240	5,050
	8.84	9.12	0.28		1100 NORTH STREET FAU 2046	2,240	2,160
	9.12	10.82	1.70		END OF CONSTRUCTION	NA	NA
2028	**0.00**	**0.45**	**0.45**	*	**RIVERDALE ROAD**	**13,900**	**13,400**
	0.45	1.17	0.72		WASHINGTON AVENUE VIA 40TH STREET	26,220	25,275
	1.17	1.68	0.51		WEST INCORPORATED LIMITS OGDEN	17,455	16,825
	1.68	2.61	0.93		HARRISON BOULEVARD - FAU 2035 FOOTHILL DRIVE	3,965	3,860
2029	**0.00**	**1.80**	**1.80**	*	**JUNCTION FAU 2031-SR 89 UNCONSTRUCTED**	**NA**	**NA**
2030	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 108 SYRACUSE ROAD WEST URBAN BOUNDARY**	**4,075**	**4,425**
	0.47	1.16	0.69		WEST INCORPORATED LIMITS ROY-SR 126	5,550	5,900
2031	**0.00**	**0.79**	**0.79**	*	**JUNCTION SOUTH WEBER DRIVE SR 60**	**1,350**	**1,045**
	0.79	1.51	0.72		JUNCTION SR 84 END OF CONSTRUCTION PORTION	NA	NA

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.51	1.87	0.36	*	BEGIN CONSTRUCTED PORTION	960	285
	1.87	2.17	0.30		COUNTY ROAD - SR 89	6,485	11,085
2032	**0.00**	**0.28**	**0.28**	*	**WALL AVENUE**	**11,830**	**11,405**
	0.28	0.43	0.15		RIVERDALE ROAD VIA 36TH STREET	8,460	12,660
	0.43	1.15	0.72		WASHINGTON BOULEVARD	10,450	12,290
	1.15	1.59	0.44		QUINCY AVENUE FAU 2027-SR 203 HARRISON BOULEVARD	11,750	13,950
2033	**0.00**	**0.69**	**0.69**	*	**JUNCTION SR 39 12TH STREET**	**13,745**	**13,650**
	0.69	1.20	0.51		7TH STREET VIA HARRISON BOULEVARD	11,635	11,335
	1.20	1.73	0.53		2ND STREET FAU 2042	11,050	10,765
2033	1.73	3.05	1.32		400 NORTH STREET FAU 2044	4,505	4,140
	3.05	3.34	0.29		SOUTH INCORPORATED LIMITS NORTH OGDEN	3,340	3,150
	3.34	4.65	1.31		1700 NORTH FAU 2048	1,625	1,580
	4.65	4.96	0.31		2600 NORTH IN NORTH OGDEN	195	190
	4.96	5.51	0.55		END OF CONSTRUCTION SECTION-FAU 2052 UNCONSTRUCTED	NA	NA
2035	**0.00**	**1.28**	**1.28**	*	**JUNCTION SR 89**	**1,175**	**1,145**
	1.28	2.93	1.65		END OF CONSTRUCTED SECTION	NA	NA
	2.93	3.47	0.54		SOUTH INCORPORATED LIMITS OGDEN UNCONSTRUCTED	NA	NA
	3.47	4.14	0.67	*	BEGIN CONSTRUCTED PORTION	1,340	1,710
	4.14	4.89	0.75		36TH STREET VIA FOOTHILL - SR 203 VIA 36TH	4,570	4,985
2036	**0.00**	**0.98**	**0.98**	*	**JUNCTION SR 79 - SR 53 VIA 1100 WEST FAU 2036**	**9,340**	**9,100**
2038	**0.00**	**0.43**	**0.43**	*	**WALL AVENUE - WASHINGTON BOULEVARD VIA 21ST STREET**	**6,550**	**6,315**
	0.44	0.71	0.27		WASHINGTON BOULEVARD VIA 20TH STREET	6,785	6,540
	0.71	1.59	0.88		JEFFERSON AVENUE-SR 203 HARRISON BOULEVARD	5,135	4,950
	1.60	1.98	0.38		WASHINGTON BOULEVARD VIA 20TH STREET-WALL AVENUE	6,550	6,315
2039	**0.00**	**1.65**	**1.65**	*	**JUNCTION FAU 2003 VIA 10TH SOUTH IN KAYSVILLE**	**1,840**	**1,790**
	1.66	2.64	0.98		JUNCTION SR 273-SR 89	2,290	2,290

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
2040	**5.38**	**7.38**	**2.00**	*	**JUNCTION SR 108-SR 126 VIA 4800 SOUTH**	**10,290**	**10,290**
2042	**0.00**	**0.61**	**0.61**	*	**DEFENSE DEPOT OGDEN MAIN GATE VIA 2ND STREET**	**7,510**	**7,315**
	0.61	1.03	0.42		WALL AVENUE	6,885	6,710
	1.03	1.90	0.87		WASHINGTON BOULEVARD VIA 2ND STREET	8,335	8,120
	1.90	2.17	0.27		JUNCTION JACKSON AVENUE FAU 2027 - HARRISON BOULEVARD	5,735	5,585
2044	**0.00**	**0.64**	**0.64**	*	**JUNCTION FAU 2076-SR 104 2100 S VIA 1850 WEST**	**NA**	**NA**
2046	**0.00**	**0.50**	**0.49**	*	**JUNCTION SR 89 VIA LARSEN LANE**	**10,355**	**9,980**
	0.50	1.03	0.53		JUNCTION SR 235 VIA 1100 NORTH	3,550	3,460
	1.03	1.46	0.43		MONROE AVENUE VIA 1100 NORTH-FAU 2033	2,420	2,355
2048	**0.00**	**1.24**	**1.24**	*	**JUNCTION FAS 595**	**435**	**420**
	1.24	2.22	0.98		JUNCTION SR 89-SR 235 UNCONSTRUCTED	NA	NA
	2.22	2.82	0.60	*	WASHINGTON BOULEVARD	340	330
	2.82	3.39	0.57		FAU 2027 VIA 1700 NORTH - MOUNTAIN ROAD	490	475
2050	**0.00**	**0.70**	**0.70**	*	**WASHINGTON BOULEVARD**	**5,435**	**5,240**
	0.70	1.68	0.98		FAU 2027 VIA 2600 NORTH - FAU 2033	2,490	2,425
2052	**0.00**	**0.49**	**0.49**	*	**450 EAST STREET VIA 3100 NORTH STREET IN NORTH OGDEN**	**3,700**	**3,190**
	0.49	0.99	0.50		750 EAST STREET VIA 3100 NORTH IN NORTH OGDEN	4,325	2,790
	0.99	1.25	0.26		1050 EAST STREET VIA 3100 NORTH STREET	2,850	1,755
	1.25	1.54	0.29		EAST INCORPORATED LIMITS NORTH OGDEN-URBAN BOUNDARY	1,940	1,090
2054	**0.00**	**1.45**	**1.45**	*	**JUNCTION FAU 2058-JUNCTION FAU 2017 VIA ELBERTA DRIVE**	**3,520**	**3,430**
2056	**0.00**	**2.01**	**2.01**	*	**JUNCTION SR 108-SR 126 VIA 6000 SOUTH IN ROY**	**3,030**	**2,950**
2058	**0.00**	**1.96**	**1.96**	*	**JUNCTION SR 89**	**2,730**	**2,630**
	1.96	2.91	0.95		ELBERTA DRIVE	3,890	3,750
	2.91	3.41	0.50		WEST INCORPORATED LIMITS PLEASANT VIEW	3,890	3,750
	3.41	3.70	0.29		WEST INC. LIMITS NORTH OGDEN - JUNCTION FAU 2017	3,890	3,750
2061	**0.00**	**1.70**	**1.70**	*	**JUNCTION FAU 2002 2ND NORTH VIA FAIRFIELD ROAD**	**5,030**	**5,030**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.70	3.65	1.95		JUNCTION SR 109 GENTILE STREET	9,220	8,985
	3.65	4.59	0.94		JUNCTION FAU 2008 ANTELOPE DRIVE-SR 193	11,545	11,250
2063	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 108 VIA 1000 WEST**	**4,085**	**3,980**
	1.50	2.00	0.50		JUNCTION 200 SOUTH FAU 2066	4,740	4,620
	2.00	2.48	0.48		JUNCTION SR 107 300 NORTH-800 NORTH FAU 2064	3,455	3,365
2064	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 108 VIA 800 NORTH COUNTY LINE CLINTON**	**4,395**	**3,515**
	1.00	2.02	1.02		JUNCTION FAU 2063 1000 WEST-SR 126	6,465	4,625
2066	**0.00**	**0.18**	**0.18**	*	**JUNCTION SR 108 VIA 200 SOUTH SYRACUSE**	**375**	**365**
	0.18	0.52	0.34		BEGIN UNCONSTRUCTED	NA	NA
2066	0.52	0.64	0.12	*	BEGIN CONSTRUCTED	4,925	4,800
	0.64	1.02	0.38		BEGIN UNCONSTRUCTED	NA	NA
	1.02	2.02	1.00	*	JUNCTION 1000 WEST FAU 2063	3,515	3,425
	2.03	2.18	0.15		JUNCTION MAIN STREET FAU 2010-SR 126	3,655	3,560
2071	**0.00**	**0.61**	**0.61**	*	**JUNCTION SR 26 VIA 300 WEST**	**16,225**	**15,810**
	0.61	0.96	0.24		4525 SOUTH IN WASHINGTON TERRACE-4700 SOUTH	12,035	11,730
	0.96	1.32	0.36	*	JUNCTION 300 WEST VIA 4800 SOUTH	3,300	3,215
	1.32	1.53	0.21		200 EAST-WASHINGTON BOULEVARD SR 89	4,505	4,390
2073	**0.00**	**0.32**	**0.32**	*	**JUNCTION SR 89**	**3,895**	**3,795**
	0.32	0.68	0.36		BEGIN UNCONSTRUCTED	NA	NA
	0.88	1.57	0.69	*	JUNCTION ADAMS AVENUE - 40TH STREET FAU 2028	4,780	4,780
2076	**0.00**	**1.00**	**1.00**	*	**WEST URBAN BOUNDARY - FAU 2001**	**5,580**	**5,580**
2078	**0.00**	**0.11**	**0.11**	*	**JUNCTION SR 89**	**3,565**	**3,610**
	0.11	0.30	0.19		1225 EAST STREET	3,740	2,465
	0.30	0.69	0.39		1400 EAST STREET-HARRISON BOULEVARD	3,740	2,465
2083	**9.80**	**12.90**	**3.10**	*	**FAU 2083 SOUTH URBAN BOUNDARY UNCONSTRUCTED**	**NA**	**NA**
	15.95	18.85	2.90	*	LOCAL ROAD	895	875

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	18.85	19.34	0.49		JUNCTION SR 127	895	875
	19.34	21.09	1.75		UNCONSTRUCTED	NA	NA
	21.09	21.57	0.48	*	CONSTRUCTED	1,255	1,220
	21.57	23.47	1.90		UNCONSTRUCTED	NA	NA
	23.47	26.07	2.60		DAVIS - WEBER COUNTY LINE - SR 37	NA	NA
3002	**0.00**	**0.24**	**0.24**	*	**JUNCTION SR 89 - 400 EAST UNCONSTRUCTED**	**NA**	**NA**
	0.24	1.13	0.37	*	400 EAST FAU 3071	3,195	3,345
	0.37	0.89	0.52		800 EAST FAU 3071	3,195	3,345
	1.13	1.48	0.35		END OF CONSTRUCTION PORTION	NA	NA
3002	1.48	3.68	2.20	*	JUNCTION CANYON DRIVE - EAST URBAN BOUNDARY	2,810	2,810
3003	**0.00**	**0.15**	**0.15**	*	**JUNCTION SR 89**	**2,015**	**1,960**
	0.15	0.42	0.27		100 NORTH VIA 100 WEST AMERICAN FORK	2,055	2,000
	0.42	1.60	1.18		300 NORTH IN AMERICAN FORK	2,055	2,000
	1.60	3.80	2.20		1120 NORTH - JUNCTION SR 92	2,105	2,050
3004	**0.00**	**0.37**	**0.37**	*	**MAIN STREET SR 89 IN SPRINGVILLE**	**13,105**	**14,500**
	0.37	1.24	0.87		400 EAST- FAU 3077 CANYON ROAD VIA 400 SOUTH	9,605	9,510
3006	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 89 MAIN STREET**	**5,255**	**5,255**
	0.39	1.24	0.85		400 EAST VIA CENTER STREET-1300 EAST STREET	4,540	4,425
3011	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 147 IN MAPLETON**	**2,010**	**1,935**
	0.39	0.99	0.60		600 NORTH MAPLETON	2,615	2,520
	0.99	1.18	0.19		1600 NORTH MAPLETON	2,615	2,520
	1.18	1.28	0.10		2000 NORTH MAPLETON	2,615	2,520
	1.28	1.67	0.39		NORTH INC. LIMITS MAPLETON-HOBBLE CREEK DRIVE	3,290	3,170
3013	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 89**	**5,750**	**5,600**
	0.60	1.10	0.58		300 NORTH VIA 500 EAST AMERICAN FORK	6,450	6,285
	1.10	1.18	0.08		END OF CONSTRUCTION VIA 500 EAST UNCONSTRUCTED	NA	NA

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.18	1.47	0.08		700 NORTH STREET UNCONSTRUCTED	NA	NA
	1.47	1.88	0.41	*	BEGIN CONSTRUCTED PORTION	3,300	3,215
	1.56	1.77	0.21		BEG UNCONSTRUCTED PORTION	NA	NA
	1.88	2.03	0.15		200 EAST-SR 74 UNCONSTRUCTED	NA	NA
3015	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 180 500 EAST UNCONSTRUCTED**	**NA**	**NA**
	0.60	1.34	0.74		4850 WEST UNCONSTRUCTED	NA	NA
	1.34	2.22	0.88	*	SR 89	3,875	3,735
	2.22	2.82	0.60		8300 NORTH	3,660	3,525
	2.82	3.37	0.55		8800 NORTH FAU 3076 UNCONSTRUCTED	NA	NA
3015	3.37	4.85	1.48	*	9200 NORTH - URBAN BOUNDARY	3,715	3,580
3023	**0.00**	**1.26**	**1.26**	*	**JUNCTION 800 SOUTH FAU 3025**	**3,965**	**3,860**
	1.26	1.81	0.55		400 WEST FAU 3033 VIA 1200 SOUTH	4,200	4,090
	1.81	2.31	0.50		MAIN STREET FAU 3039 - SR 89	6,685	6,515
3024	**0.00**	**1.13**	**1.13**	*	**BOAT HARBOR**	**890**	**855**
	1.13	2.10	0.97		JUNCTION FAU 3029 ROAD TO AIRPORT-SR 114	4,545	4,380
	2.11	2.54	0.43	*	SR 89 500 WEST	26,035	25,370
	2.54	3.18	0.64		UNIVERSITY AVENUE VIA CENTER STREET	11,405	11,115
	3.18	3.35	0.17		700 EAST STREET-900 EAST STREET	7,545	7,350
3025	**0.00**	**0.50**	**0.50**	*	**JUNCTION 800 SOUTH OREM FAU 3042**	**4,175**	**4,065**
	0.50	1.01	0.51		JUNCTION 400 SOUTH	4,175	4,065
	1.01	1.51	0.50		CENTER STREET VIA 1200 WEST OREM	5,650	5,505
	1.51	2.03	0.52		400 NORTH VIA 1200 WEST	4,140	3,975
	2.03	3.03	1.00		800 NORTH OREM-1600 NORTH FAU 3052	2,200	2,100
3026	**0.18**	**0.81**	**0.63**	*	**UNIVERSITY AVENUE PROVO**	**6,750**	**6,140**
	0.81	0.99	0.18		700 EAST VIA 700 NORTH-900 EAST	5,595	5,450
3027	**0.00**	**1.00**	**1.00**	*	**JUNCTION 800 SOUTH FAU 3042 OREM**	**5,975**	**5,820**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.00	1.45	0.45		CENTER STREET FAU 3046 VIA 400 EAST	6,375	6,210
	1.45	1.96	0.51		400 NORTH FAU 3050 VIA 400 EAST	4,105	4,000
	1.96	2.56	0.60		800 NORTH SR 52 - 1200 NORTH FAU 3043	3,285	3,200
3029	**0.00**	**1.11**	**1.11**	*	**JUNCTION CENTER STREET FAU 3024**	**1,230**	**2,060**
	1.11	3.51	2.40		BEGIN UNCONSTRUCTED-SR 189	NA	NA
3030	**0.00**	**0.37**	**0.37**	*	**JUNCTION SR 114**	**3,630**	**3,535**
	0.37	1.57	1.20		JUNCTION 2100 WEST FAU 3039	19,060	18,575
	1.57	1.85	0.28		500 WEST STREET SR 89	20,960	20,430
	1.85	2.02	0.17		200 WEST VIA 800 NORTH - UNIVERSITY AVENUE	20,980	20,445
3031	**0.00**	**0.50**	**0.50**	*	**JUNCTION 1600 NORTH STREET**	**6,165**	**6,005**
	0.50	1.28	0.78		NORTH INCORPORATED LIMITS OREM	4,365	4,250
	1.28	1.50	0.22		400 NORTH STREET VIA 400 EAST STREET IN LINDON	4,365	4,250
	1.50	1.79	0.29		BEGIN UNCONSTRUCTED	NA	NA
	1.79	2.39	0.60	*	NORTH INCORPORATED LIMITS LINDON	655	635
	2.39	2.58	0.19		200 SOUTH PLEASANT GROVE UNCONSTRUCTED	NA	NA
	2.58	3.18	0.60	*	1300 EAST PLEASANT GROVE	NA	NA
	3.18	3.36	0.18	*	CONSTRUCTED PORTION	1,315	1,280
	3.36	3.56	0.20		UNCONSTRUCTED PORTION-FAU 3064	NA	NA
3032	**0.00**	**0.29**	**0.29**	*	**JUNCTION SR 89**	**26,955**	**26,270**
	0.29	0.45	0.16		200 WEST VIA 1230 NORTH PROVO	26,955	26,270
	0.45	0.56	0.11		UNIVERSITY AVENUE - CANYON ROAD FAU 3051 VIA 1230 NORTH	25,170	24,530
3033	**0.00**	**0.51**	**0.51**	*	**JUNCTION 800 SOUTH FAU 3042 VIA 400 WEST**	**6,895**	**6,720**
	0.51	1.01	0.50		400 SOUTH VIA 400 WEST STREET	6,285	6,125
	1.01	1.52	0.51		CENTER STREET FAU 3046	5,715	5,570
	1.52	2.04	0.52		JUNCTION 400 NORTH FAU 3050 - 800 NORTH SR 52	6,380	6,215
3034	**0.00**	**0.43**	**0.43**	*	**JUNCTION CANYON ROAD**	**18,680**	**18,010**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.43	0.71	0.28		450 EAST- 900 EAST VIA 1650 NORTH	11,625	10,780
3036	**0.00**	**0.45**	**0.45**	*	**UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265**	**24,555**	**23,670**
	0.45	0.58	0.13		UNIVERSITY AVENUE VIA 2230 NORTH - CANYON ROAD FAU 3051	17,405	16,780
3039	**0.00**	**0.50**	**0.50**	*	**CENTER STREET VIA 1225 WEST STREET**	**950**	**925**
	0.50	1.71	1.21		BEGIN UNCONSTRUCTED SECTION	NA	NA
	1.71	2.07	0.36	*	1460 NORTH	3,650	3,555
	2.07	3.16	1.09		NORTH INCORPORATED LIMITS PROVO VIA 2100 WEST	4,025	3,920
	3.16	3.71	0.55		SR 265 - 800 SOUTH FAU 3042	6,015	5,860
3040	**0.00**	**0.12**	**0.12**	*	**UNIVERSITY AVENUE SR 189 - CANYON ROAD**	**22,320**	**21,515**
3041	**0.00**	**0.64**	**0.64**	*	**UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265**	**14,220**	**12,930**
	0.64	1.14	0.50		800 SOUTH STREET OREM	11,865	10,150
	1.14	1.65	0.51		400 SOUTH VIA 800 EAST	9,300	8,455
	1.65	2.17	0.52		CENTER STREET FAU 3046 OREM	7,600	7,115
	2.17	2.67	0.50		400 NORTH FAU 3050 VIA 800 EAST	7,205	6,860
	2.67	3.57	0.90		800 NORTH SR 52	12,540	12,090
	3.57	5.18	1.61		1600 NORTH - 400 EAST IN OREM	10,495	10,115
3042	**0.00**	**0.50**	**0.50**	*	**JUNCTION 1200 WEST FAU 3025**	**2,970**	**2,990**
	0.50	1.00	0.50		800 WEST STREET VIA 800 SOUTH	3,585	3,415
	1.00	1.50	0.50		400 WEST FAU 3033	6,180	4,870
	1.50	1.85	0.35		SAND HILL ROAD	8,365	8,150
	1.85	2.49	0.64		JUNCTION SR 89	11,535	11,420
	2.49	2.69	0.20		800 EAST VIA 800 SOUTH OREM	7,185	7,000
	2.69	2.74	0.05		END OF CONSTRUCTED PORTION	NA	NA
	2.74	3.37	0.63	*	BEGINNING OF CONSTRUCTION	9,435	9,375
	3.37	3.83	0.46		UNIVERSITY AVENUE - CANYON ROAD	8,685	8,070
3043	**0.00**	**1.04**	**1.04**	*	**JUNCTION 1200 WEST FAU 3025 VIA 1200 NORTH**	**4,725**	**4,605**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	1.04	1.98	0.94		SR 89 OREM VIA 1200 NORTH	3,055	2,975
	1.98	2.48	0.50		400 EAST FAU 3027 - 800 EAST FAU 3041	2,450	2,385
3044	**0.00**	**0.59**	**0.59**	*	**JUNCTION SR 89 - 400 EAST VIA EAST CENTER STREET**	**2,005**	**1,950**
3045	**0.00**	**0.27**	**0.27**	*	**JUNCTION 300 SOUTH**	**10,705**	**10,320**
	0.27	0.73	0.46		CENTER STREET VIA 200 WEST	17,430	16,805
	0.73	1.00	0.27		500 NORTH VIA 200 WEST PROVO	18,330	17,670
	1.00	1.44	0.44		800 NORTH VIA 200 WEST	19,315	18,620
	1.44	1.92	0.48		1230 NORTH VIA 200 WEST	17,515	16,885
	1.92	2.34	0.42		UNIVERSITY PARKWAY (BYU DIAG.) SR 265 - 2230 NORTH FAU 3036	17,925	17,280
3046	**0.00**	**0.43**	**0.43**	*	**JUNCTION SR 114**	**10,330**	**9,390**
	0.43	0.50	0.07		JUNCTION FAI 15 VIA CENTER STREET	17,635	17,005
	0.50	2.04	1.54		1200 WEST FAU 3025	17,875	17,230
	2.04	3.01	0.97		JUNCTION SR 89	18,510	17,845
	3.01	3.54	0.53		800 EAST STREET VIA CENTER STREET OREM	13,985	13,480
	3.54	4.05	0.51		EAST INCORPORATED LIMITS OF OREM VIA CENTER STREET	10,930	10,655
	4.05	4.43	0.38		JCT. SR 189 UNIVERSITY AVENUE- FAU 3051 UNCONSTRUCTED	NA	NA
3047	**0.00**	**0.26**	**0.26**	*	**JUNCTION SR 89 300 SOUTH VIA 700 EAST**	**4,120**	**4,015**
	0.26	0.90	0.64		CENTER STREET FAU 3024	2,650	11,400
	0.90	1.11	0.21		700 NORTH FAU 3026	15,795	15,390
	1.11	1.72	0.61		900 NORTH VIA 700 EAST	20,175	19,660
	1.72	1.82	0.10		BRIGHAM YOUNG UNIVERSITY ADMINISTRATION BUILDING	20,860	20,330
	1.82	2.21	0.39		450 EAST - CANYON ROAD FAU 3051	22,345	21,775
3050	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 114**	**4,100**	**3,995**
	0.47	1.48	1.01		1200 WEST VIA GENEVA ROAD OREM	7,665	7,470
	1.48	1.86	0.38		400 WEST STREET FAU 3033 OREM	7,290	7,105
	1.86	2.99	1.13		JUNCTION SR 89 VIA GENEVA ROAD - 800 EAST FAU 3041	10,910	4,195

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
3051	**0.00**	**0.21**	**0.21**	*	**JUNCTION UNIVERSITY AVENUE SR 189**	**18,505**	**18,035**
	0.21	0.57	0.36		1230 NORTH PROVO	16,625	16,200
	0.57	2.68	2.11		1650 NORTH STREET VIA CANYON ROAD PROVO	9,460	14,030
	2.68	3.32	0.64		JUNCTION FAU 3042 AT EDGEMONT VIA CANYON ROAD	14,075	13,715
	3.32	4.48	1.16		JUNCTION 4525 NORTH FAU 3059 - SR 189	5,995	5,840
3052	**0.00**	**1.17**	**1.17**	*	**JUNCTION FAI 15**	**13,415**	**13,500**
	1.17	1.28	0.11		JUNCTION SR 89 VIA 1600 NORTH - 400 WEST FAU 3031	14,710	14,120
3053	**0.00**	**0.66**	**0.66**	*	**2200 NORTH STREET PROVO**	**5,425**	**5,285**
	0.66	2.08	1.42		2950 NORTH - 4525 NORTH STREET VIA 650 EAST	1,385	1,350
3055	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 89 IN PROVO**	**12,375**	**14,775**
	0.60	1.25	0.65		CENTER STREET VIA 900 EAST IN PROVO	17,535	19,570
	1.25	2.02	0.77		700 NORTH VIA 900 EAST IN PROVO	22,155	23,320
	2.02	2.71	0.69		1430 NORTH VIA 900 EAST IN PROVO	22,470	26,000
	2.71	3.17	0.46		650 EAST FAU 3053 - FAU 3051 VIA 2200 NORTH IN PROVO	14,000	15,600
3056	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 146 VIA 200 SOUTH PLEASANT GROVE**	**5,360**	**6,445**
	0.44	1.72	1.28		500 EAST - 1500 EAST VIA 200 SOUTH	6,030	6,700
3057	**0.00**	**0.09**	**0.09**	*	**JUNCTION FAU 3039 2100 WEST**	**1,570**	**1,530**
	0.09	0.50	0.41		BEGIN UNCONSTRUCTED PORTION	NA	NA
	0.50	1.03	0.53	*	BEGIN CONSTRUCTED PORTION	8,210	8,000
	1.03	1.18	0.15		COLUMBIA LANE	5,645	5,500
	1.18	1.32	0.14		JUNCTION SR 89	4,870	4,745
	1.32	1.34	0.02		BEGIN UNCONSTRUCTED	NA	NA
	1.34	1.50	0.16	*	BEGIN CONSTRUCTED PORTION - JUNCTION 550 WEST	5,150	5,015
	1.50	1.75	0.25	*	JUNCTION 1850 NORTH - SR 265	31,350	30,550
3059	**0.00**	**2.78**	**2.78**	*	**JUNCTION NORTH TEMPLE DRIVE UNCONSTRUCTED**	**NA**	**NA**
	2.78	3.05	0.27	*	BEGIN CONSTRUCTED - FAU 3051	270	340

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
3062	**0.00**	**0.43**	**0.43**	*	**JUNCTION SR 146 PLEASANT GROVE**	**5,135**	**5,005**
	0.43	1.33	0.90		500 EAST-FAU 3031 VIA 500 NORTH	3,085	3,005
3064	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 89**	**1,855**	**1,805**
	0.39	0.44	0.05		BEGIN UNCONSTRUCTED	NA	NA
	0.44	1.42	0.98	*	BEGINNING OF CONSTRUCTION 500 EAST STREET	3,715	2,300
	1.42	2.56	1.14		EAST INCORPORATED LIMITS AMERICAN FORK	3,900	2,995
	2.56	2.84	0.28		280 WEST STREET	2,800	2,175
	2.84	3.91	1.07		JUNCTION SR 146	2,800	2,175
	3.91	4.13	0.22		BEGIN UNCONSTRUCTED - FAU 3031	NA	NA
3071	**0.00**	**1.01**	**1.01**	*	**JUNCTION SR 89**	**3,800**	**3,265**
	1.01	1.40	0.39		400 SOUTH SPRINGVILLE	3,205	2,315
	1.40	1.79	0.39		CENTER STREET VIA 400 EAST SPRINGVILLE	2,575	1,920
	1.79	2.83	1.04		400 NORTH VIA 400 EAST UNCONSTRICTED - SR 89	NA	NA
3076	**0.00**	**0.79**	**0.79**	*	**FAU 1403 URBAN BOUNDARY LEHI UNCONSTRUCTED**	**NA**	**NA**
	0.79	1.05	0.26	*	BEGIN CONSTRUCTED PORTION	3,305	4,085
	1.05	1.45	0.40		FAU 3003 - SR 74 FAU 3005	3,305	4,085
3077	**0.00**	**0.61**	**0.61**	*	**HOBBLE CREEK ROAD**	**2,190**	**3,555**
	0.61	1.00	0.39		400 SOUTH STREET - CENTER STREET VIA 1300 EAST	4,590	5,250
3078	**0.00**	**0.48**	**0.48**	*	**500 EAST STREET**	**2,100**	**3,450**
	0.48	0.69	0.21		EAST INCORPORATED LIMITS AMERICAN FORK VIA 700 NORTH	2,100	3,450
	0.69	2.30	1.61		JUNCTION 4650 WEST - JUNCTION SR 146	1,505	2,960
4001	**7.50**	**8.37**	**0.87**	*	**900 SOUTH ST. GEORGE**	**7,150**	**6,890**
	8.37	8.47	0.10		700 EAST	7,315	7,050
	8.47	8.81	0.34		600 SOUTH VIA 700 EAST	7,530	7,260
	8.81	9.26	0.45		300 SOUTH - JUNCTION SR 34	9,465	9,125
4002	**0.00**	**0.10**	**0.10**	*	**JUNCTION SR 18**	**32,755**	**31,580**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1994 AADT
	0.10	1.73	1.63		VALLEY DRIVE	24,700	23,820
	1.73	2.03	0.30		WEST INCORPORATED LIMITS ST. GEORGE	20,595	19,855
	2.03	2.43	0.40		WEST URBAN BOUNDARY ST. GEORGE - FAS 416	20,595	19,855
5001	**0.00**	**1.59**	**1.59**	*	**JUNCTION SR 91**	**5,415**	**6,840**
	1.59	1.90	0.31		600 SOUTH STREET	6,150	6,835
	1.90	4.14	2.24		300 SOUTH STREET - JUNCTION SR 30	7,445	7,445
5003	**0.00**	**1.01**	**1.01**	*	**JUNCTION SR 89 - SR 237**	**6,385**	**6,220**
5007	**0.00**	**0.50**	**0.50**	*	**JUNCTION LOCAL ROAD - CENTER STREET LOGAN**	**8,010**	**7,720**
	0.21	1.12	0.91		JUNCTION SOUTH URBAN BOUNDARY - JCT. COUNTY ROAD	8,010	7,720
5007	0.75	1.76	1.01	*	JUNCTION SR 91 - JUNCTION LOCAL ROAD	14,790	14,255
6005	**3.69**	**4.24**	**0.55**	*	**URBAN BOUNDARY**	**960**	**935**
	4.24	4.86	0.62		WEST INC. LIMITS SPANISH FORK - SR 156 MAIN STREET	1,955	2,125
7001	**0.00**	**0.56**	**0.56**	*	**JUNCTION SR 55 IN PRICE**	**3,900**	**3,900**
	0.56	0.73	0.17		APPROXIMATELY 350 NORTH - NORTH INC. LIMITS PRICE	3,210	3,450
7003	**0.00**	**0.52**	**0.52**	*	**JUNCTION SR 55 - PRICE NORTH URBAN BOUNDARY FAS 298**	**6,040**	**5,885**
7004	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 55 - PRICE EAST URBAN BOUNDARY FAS 299**	**2,350**	**2,280**
8004	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 36 MAIN STREET IN TOOELE**	**5,375**	**5,060**
	0.77	1.58	0.81		700 EAST VIA 200 NORTH	1,980	2,450
	1.58	2.28	0.70		TOOELE EAST INCORPORATED LIMITS - FAS 102	3,515	3,425
9002	**14.43**	**14.92**	**0.49**	*	**600 WEST VIA FOREST STREET - MAIN STREET SR 13**	**7,985**	**7,695**

END OF AADT SECTION

AVERAGE ANNUAL DAILY TRAFFIC
(AADT) SUNDAY - SATURDAY,
AVERAGE WEEKDAY TRAFFIC
(AWDT) MONDAY -FRIDAY,
AND
AVERAGE WEEKEND TRAFFIC
(AWET) SATURDAY - SUNDAY

TRAFFIC ON UTAH HIGHWAYS 1995

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00006	**0.00**	**78.72**	**78.72**	*	**NEVADA - UTAH STATE LINE**	**530**	**520**	**550**
	78.72	82.13	3.41	*	LOCAL ROAD WEST OF HINCKLEY	575	570	590
	82.13	83.88	1.75		WEST INCORPORATED LIMITS HINCKLEY	880	870	910
	83.88	84.15	0.27		EAST INCORPORATED LIMITS HINCKLEY	2,415	2,390	2,490
	84.15	88.45	4.30		JUNCTION SR 257	4,325	4,270	4,450
	88.45	89.67	1.22		WEST INCORPORATED LIMITS DELTA	5,985	5,910	6,160
	89.67	90.95	1.28		JUNCTION SR 50	5,985	5,910	6,160
	90.95	100.03	9.08		EAST INCORPORATED LIMITS DELTA	4,185	4,010	4,630
	100.03	104.32	4.29		JUNCTION SR 174 ROAD TO INTERMOUNTAIN POWER PLANT	3,035	2,910	3,350
	104.32	105.63	1.31		SOUTH INCORPORATED LIMITS LYNNDYL	3,035	2,910	3,350
	105.63	105.67	0.04		JUNCTION SR 132	2,035	1,950	2,250
	105.67	107.86	2.19		NORTH INCORPORATED LIMITS LYNNDYL	2,035	1,950	2,250
	107.86	121.86	14.00		MILLARD - JUAB COUNTY LINE	2,035	1,950	2,250
	121.86	137.06	15.20		JERICO JUNCTION FAS 273	1,130	1,040	1,370
	137.06	138.83	1.77		Y CONNECT TO SR 36	1,130	1,040	1,370
	138.83	139.68	0.85		TINTIC JUNCTION SR 36	1,135	1,040	1,370
	139.68	141.30	1.62		WEST INCORPORATED LIMITS EUREKA	1,980	1,810	2,390
	141.30	141.44	0.14		EAST INCORPORATED LIMITS EUREKA	1,140	1,040	1,380
	141.44	150.36	8.92		JUAB - UTAH COUNTY LINE	1,140	1,040	1,380
	150.36	152.91	2.55		JUNCTION SR 68 ELBERTA	1,860	1,700	2,250
	152.91	153.75	0.84		WEST INCORPORATED LIMITS GOSHEN	2,520	2,310	3,050
	153.75	154.50	0.75		EAST INCORPORATED LIMITS GOSHEN	2,950	2,700	3,570
	154.50	158.58	4.08		WEST INCORPORATED LIMITS GENOLA	3,350	3,070	4,050
	158.58	159.76	1.18		EAST INCORPORATED LIMITS GENOLA	2,565	2,350	3,100

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00006	159.76	160.21	0.45	WEST INCORPORATED LIMITS SANTAQUIN	5,040	4,620	6,090
	160.21	160.76	0.55	WYE CONNECTION IN SANTAQUIN	12,850	11,780	15,540
	160.76	161.06	0.30	EAST INCORPORATED LIMITS SANTAQUIN-JUNCTION FAI 15	12,850	11,780	15,540
	161.07	162.47	1.41	* JUNCTION FAI 15 SPANISH FORK	11,915	11,970	11,780
	162.47	162.70	0.23	EAST INCORPORATED LIMITS SPANISH FORK	11,915	11,970	11,780
	162.70	163.23	0.53	JUNCTION SR 147 400 SOUTH	9,670	9,710	9,560
	163.23	165.58	2.35	SOUTHEAST INCORPORATED LIMITS SPANISH FORK	7,800	7,840	7,710
	165.58	166.32	0.74	JUNCTION SR 198	5,935	6,340	4,920
	166.32	167.17	0.85	MOARK JUNCTION	8,245	7,700	9,610
	167.17	175.90	8.73	EAST URBANIZED BOUNDARY	8,245	7,700	9,610
	175.90	183.24	7.34	JUNCTION SR 89 AT THISTLE	5,775	5,710	5,950
	183.24	192.78	9.54	SHEEP CREEK ROAD	5,775	5,710	5,950
	192.78	199.01	6.23	CENTER OF TUCKER	5,775	5,710	5,950
	199.01	199.90	0.89	UTAH - WASATCH COUNTY LINE	5,775	5,710	5,950
	199.90	201.65	1.75	SOLDIER SUMMIT	5,775	5,710	5,950
	201.65	204.75	3.10	WASATCH - UTAH COUNTY LINE	5,775	5,710	5,950
	204.75	210.75	6.00	JUNCTION SR 96 ROAD TO SCOFIELD	5,770	5,580	6,260
	210.75	218.59	7.84	UTAH - CARBON COUNTY LINE	5,770	5,580	6,260
	218.59	219.92	1.33	JUNCTION SR 191	6,385	6,310	6,580
	219.92	220.99	1.07	NORTH INCORPORATED LIMITS HELPER	6,385	6,310	6,580
	220.99	221.31	0.32	ROAD RIGHT TO SPRING CANYON	9,915	9,800	10,210
	221.31	221.96	0.65	JUNCTION SR 244 NORTH BUSINESS LOOP	12,115	11,970	12,480
	221.96	222.40	0.44	JUNCTION SR 244 SOUTH BUSINESS LOOP	13,590	13,430	14,000
	222.40	224.47	2.07	SOUTH INCORPORATED LIMITS HELPER	13,590	13,430	14,000
	224.47	224.99	0.52	JUNCTION SR 139	10,600	10,940	9,750
	224.99	228.47	3.48	FAS 298 (OLD ROAD)	10,600	10,940	9,750
	228.47	228.59	0.12	WEST INCORPORATED LIMITS PRICE	10,600	10,940	9,750
	228.59	228.81	0.22	JUNCTION SR 55 WEST OF PRICE	9,895	11,570	5,720
	228.81	229.84	1.03	WEST URBANIZED BOUNDARY PRICE	9,895	11,570	5,720

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00006	229.84	231.18	1.34		JUNCTION SR 10	11,185	13,070	6,460
	231.18	234.67	3.49		JUNCTION SR 55 & SOUTH INCORPORATED LIMITS PRICE	14,900	15,920	12,340
	234.67	238.36	3.69		WEST INCORPORATED LIMITS WELLINGTON	15,725	15,540	16,200
	238.36	244.78	6.42		EAST INCORPORATED LIMITS WELLINGTON	7,125	7,040	7,340
	244.78	250.51	5.73		JUNCTION SR 123 SUNNYSIDE JUNCTION	3,390	3,240	3,770
	250.51	266.96	16.45		CARBON - EMERY COUNTY LINE	3,390	3,240	3,770
	266.96	289.12	22.16		WOODSIDE - FAI 70 WEST OF GREEN RIVER	3,390	3,240	3,770
A00009	**0.00**	**1.11**	**1.11**	*	**JUNCTION FAI 15**	**10,500**	**10,940**	**9,400**
	1.11	3.62	2.51		HARRISBURG JUNCTION	9,290	9,680	8,320
	3.62	9.76	6.14		WEST INCORPORATED LIMITS HURRICANE	9,290	9,680	8,320
	9.76	10.97	1.21		JUNCTION SR 59 IN HURRICANE	11,000	11,460	9,850
	10.97	11.13	0.16		EAST INCORPORATED LIMITS HURRICANE	11,480	11,960	10,280
	11.13	12.44	1.31		WEST INCORPORATED LIMITS LA VERKIN	9,990	10,410	8,940
	12.44	13.16	0.72		JUNCTION SR 17 IN LA VERKIN	3,700	3,660	3,810
	13.16	16.86	3.70		EAST INCORPORATED LIMITS LA VERKIN	3,290	3,250	3,390
	16.86	18.88	2.02		WEST INCORPORATED LIMITS VIRGIN	3,290	3,250	3,390
	18.88	24.87	5.99		EAST INCORPORATED LIMITS VIRGIN	3,205	3,170	3,300
	24.87	28.81	3.94		WEST INCORPORATED LIMITS ROCKVILLE	3,250	3,210	3,350
	28.81	29.78	0.97		EAST INCORPORATED LIMITS ROCKVILLE	3,250	3,210	3,350
	29.78	32.59	2.81		WEST INC. LIMITS SPRINGDALE - EAST INC. LIMITS SPRINGDALE	3,520	3,480	3,630
	32.60	44.36	11.77	*	EAST LIMITS ZION PARK - SR 89 MT CARMEL	1,660	1,640	1,710
A00010	**0.00**	**7.57**	**7.57**	*	**JUNCTION FAI 70**	**415**	**400**	**460**
	7.57	12.01	4.44		SEVIER EMERY COUNTY LINE	415	400	460
	12.01	13.05	1.04		WEST INCORPORATED LIMITS EMERY	690	660	760
	13.05	25.00	11.95		EAST INCORPORATED LIMITS EMERY	1,640	1,570	1,810
	25.00	28.30	3.30		SOUTH INCORPORATED LIMITS FERRON	3,855	3,690	4,260
	28.30	29.80	1.50		NORTH INCORPORATED LIMITS FERRON	3,310	3,170	3,660
	29.80	30.77	0.97		SOUTH INCORPORATED LIMITS CLAWSON	3,310	3,170	3,660
	30.77	34.77	4.00		NORTH INCORPORATED LIMITS CLAWSON	3,310	3,170	3,660

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00010	34.77	37.76	2.99		JUNCTION SR 57	4,050	3,880	4,480
	37.76	38.79	1.03		SOUTH INCORPORATED LIMITS CASTLEDALE	6,350	6,080	7,020
	38.79	41.33	2.54		NORTH INCORPORATED LIMITS CASTLEDALE	3,235	3,100	3,580
	41.33	46.65	5.32		JUNCTION SR 29	5,835	5,590	6,450
	46.65	47.68	1.03		SOUTH INCORPORATED LIMITS HUNTINGTON	9,250	8,860	10,220
	47.68	48.85	1.17		JUNCTION SR 31	6,810	6,520	7,530
	48.85	49.51	0.66		NORTH INCORPORATED LIMITS HUNTINGTON	5,150	4,930	5,690
	49.51	56.73	7.22		JUNCTION SR 155 ROAD TO CLEVELAND	3,530	3,910	2,590
	56.73	59.34	2.61		JUNCTION SR 155 ROAD TO ELMO	5,130	4,910	5,670
	59.34	61.09	1.75		EMERY CARBON COUNTY LINE	5,130	4,910	5,670
	61.09	67.31	6.22		JUNCTION SR 122	6,170	5,910	6,820
	67.31	67.54	0.23		PRICE SOUTH URBANIZED BOUNDARY	7,035	7,580	5,670
	67.54	68.06	0.52		PRICE SOUTH INCORPORATED LIMITS	8,260	8,900	6,660
	68.06	68.87	0.81		JUNCTION SR 6 PRICE BYPASS	8,895	9,510	7,370
	68.87	68.96	0.09		MAIN STREET - JUNCTION SR 55 100 NORTH STREET	8,275	8,840	6,850
A00011	**0.00**	**2.00**	**2.00**	*	**ARIZONA - UTAH STATE LINE**	**3,745**	**3,870**	**3,430**
	2.00	2.96	0.96		SOUTH INCORPORATED LIMITS KANAB - JUNCTION SR 89 KANAB	4,945	4,740	5,460
A00012	**0.00**	**13.68**	**13.68**	*	**JUNCTION SR 89**	**1,975**	**1,950**	**2,030**
	13.68	20.95	7.27		TROPIC JUNCTION SR 63	1,950	1,870	2,160
	20.95	21.48	0.53		NORTH INCORPORATED LIMITS TROPIC	1,545	1,480	1,710
	21.48	25.64	4.16		SOUTH INCORPORATED LIMITS TROPIC	1,095	1,050	1,210
	25.64	25.95	0.31		WEST INCORPORATED LIMITS CANNONVILLE	1,125	1,080	1,240
	25.95	29.25	3.30		EAST INCORPORATED LIMITS CANNONVILLE	1,165	1,120	1,290
	29.25	29.48	0.23		WEST INCORPORATED LIMITS HENRIEVILLE	1,345	1,290	1,490
	29.48	59.16	29.68		EAST INCORPORATED LIMITS HENRIEVILLE	950	910	1,050
	59.16	60.49	1.33		WEST INCORPORATED LIMITS ESCALANTE	3,015	2,890	3,330
	60.49	64.82	4.33		SOUTHEAST INCORPORATED LIMITS ESCALANTE	1,020	980	1,130
	64.82	83.77	18.95		JUNCTION LOCAL ROAD (HOLE IN THE ROCK)	1,020	980	1,130
	83.77	87.92	4.15		WEST INCORPORATED LIMITS BOULDER	860	820	950

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00012	87.92	92.96	5.04		FOREST BOUNDARY	535	510	590
	92.96	111.21	18.25		NORTH INCORPORATED LIMITS BOULDER	535	510	590
	111.21	115.74	4.53		GARFIELD - WAYNE COUNTY LINE	280	270	310
	115.74	117.00	1.26		DIXIE NATIONAL FOREST BOUNDARY	280	270	310
	117.00	118.95	1.95		GROVER	230	220	250
	118.95	123.67	4.72		TEASDALE ROAD - SR 24 WEST OF TORREY	190	180	210
A00013	**0.00**	**1.34**	**1.34**	*	**JUNCTION SR 91**	**17,735**	**18,950**	**14,690**
	1.34	1.64	0.30		JUNCTION SR 90 IN BRIGHAM CITY	16,730	17,880	13,860
	1.64	2.87	1.23		JUNCTION FOREST STREET	15,835	16,920	13,110
	2.87	3.63	0.76		JUNCTION SR 38 VIA MAIN STREET BRIGHAM CITY	4,155	4,440	3,440
	3.63	5.58	1.95		NORTH INCORPORATED LIMITS BRIGHAM CITY	3,985	4,260	3,300
	5.58	7.26	1.68		JUNCTION FAI 15 NORTH BRIGHAM CITY INTERCHANGE	7,200	6,900	7,960
	7.26	8.21	0.95		EAST INCORPORATED LIMITS CORRINNE	6,825	6,540	7,540
	8.21	9.48	1.27		JUNCTION SR 83 IN CORRINNE	2,250	2,280	2,180
	9.48	12.16	2.68		NORTH INCORPORATED LIMITS CORRINNE	1,880	1,900	1,820
	12.16	13.72	1.56		SOUTH INCORPORATED LIMITS BEAR RIVER CITY	2,075	2,100	2,010
	13.72	15.97	2.25		NORTH INCORPORATED LIMITS BEAR RIVER CITY	1,425	1,440	1,380
	15.97	17.69	1.72		SOUTH INCORPORATED LIMITS ELWOOD	1,375	1,390	1,330
	17.69	18.93	1.24		JUNCTION FAI 15 IN ELWOOD	1,920	1,940	1,860
	18.93	19.61	0.68		NORTH INCORPORATED LIMITS ELWOOD	1,920	1,940	1,860
	19.61	19.93	0.32		SOUTHEAST INCORPORATED LIMITS TREMONTON	1,920	1,940	1,860
	19.93	20.70	0.77		JUNCTION SR 102 HAWS CORNER	1,815	1,840	1,760
	20.70	22.52	1.82		NORTHEAST INCORPORATED LIMITS TREMONTON	1,815	1,840	1,760
	22.52	25.02	2.50		JUNCTION SR 82	1,865	1,890	1,810
	25.02	30.97	5.95		JUNCTION SR 30 IN RIVERSIDE	1,750	1,770	1,700
	30.97	31.42	0.45		SOUTH INCORPORATED LIMITS PLYMOUTH	1,750	1,770	1,700
	31.42	32.30	0.88		WEST INCORPORATED LIMITS PLYMOUTH	1,750	1,770	1,700
	32.30	32.90	0.60		ROAD TO NUCOR STEEL PLANT - JUNCTION FAI 15	1,375	1,390	1,330
A00014	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 130 MAIN STREET IN CEDAR CITY**	**3,730**	**3,460**	**4,400**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00014	1.60	2.86	1.26		EAST INCORPORATED LIMITS CEDAR CITY	1,920	1,780	2,270
	2.86	10.92	8.06		EAST URBAN BOUNDARY CEDAR CITY	1,380	1,320	1,530
	10.92	17.93	7.01		DIXIE NATIONAL FOREST BOUNDARY	1,380	1,320	1,530
	17.93	22.50	4.57		JCT. SR 148 ROAD TO CEDAR BREAKS NATIONAL MONUMENT	475	460	520
	22.50	40.48	17.98		IRON - KANE COUNTY LINE - LONG VALLEY JUNCTION	475	460	520
A00015	**0.00**	**1.80**	**1.80**	*	**UTAH - ARIZONA STATE LINE**	**14,000**	**13,370**	**15,580**
	1.80	4.69	2.89		SOUTH INCORPORATED LIMITS ST GEORGE	14,000	13,370	15,580
	4.69	6.32	1.63		BLOOMINGTON INTERCHANGE	28,590	27,300	31,810
	6.32	8.67	2.35		SOUTH ST. GEORGE INTERCHANGE	24,860	23,740	27,660
	8.67	10.66	1.99		EAST ST. GEORGE INTERCHANGE	32,760	31,280	36,450
	10.66	10.74	0.08		NORTHEAST URBAN BOUNDARY ST. GEORGE	32,760	31,280	36,450
	10.74	10.95	0.21		N.E. INC. LIMITS ST. GEORGE & WEST INC. LIMITS WASHINGTON	32,760	31,280	36,450
	10.95	13.08	2.13		WASHINGTON INTERCHANGE	21,375	20,410	23,790
	13.08	15.95	2.87		EAST INCORPORATED LIMITS WASHINGTON	21,375	20,410	23,790
	15.95	22.39	6.44		ZION PARK INTERCHANGE	11,930	11,390	13,280
	22.39	22.61	0.22		WEST INCORPORATED LIMITS LEEDS	11,930	11,390	13,280
	22.61	22.76	0.15		SOUTH LEEDS INTERCHANGE	10,830	10,570	11,490
	22.76	23.75	0.99		OUT OF LEEDS	10,830	10,570	11,490
	23.75	24.39	0.64		NORTH LEEDS INTERCHANGE	11,240	10,970	11,920
	24.39	27.51	3.12		NORTH INCORPORATED LIMITS LEEDS	11,240	10,970	11,920
	27.51	30.72	3.21		ANDERSON INTERCHANGE	11,935	11,640	12,660
	30.72	31.90	1.18		BROWSE AREA INTERCHANGE	11,890	11,600	12,610
	31.90	33.48	1.58		PINTURA INTERCHANGE	11,870	11,580	12,590
	33.48	36.81	3.33		SNOWFIELD INTERCHANGE	11,870	11,580	12,590
	36.81	40.29	3.48		BLACK RIDGE INTERCHANGE	11,870	11,580	12,590
	40.29	42.21	1.92		KOLOB CANYON INTERCHANGE	11,870	11,580	12,590
	42.21	42.24	0.03		NEW HARMONY INTERCHANGE	11,800	11,510	12,520
	42.24	51.22	8.98		WASHINGTON - IRON COUNTY LINE	11,800	11,510	12,520
	51.22	56.88	5.66		NORTH KANARRAVILLE EXIT	12,265	11,970	13,010

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	56.88	57.00	0.12	SOUTH URBAN BOUNDARY SOUTH CEDAR CITY INTERCHANGE	9,895	9,650	10,500
	57.00	58.93	1.93	SOUTH INCORPORATED LIMITS CEDAR CITY	9,895	9,650	10,500
	58.93	60.07	1.14	CENTER CEDAR INTERCHANGE SR 56	11,450	11,170	12,150
	60.07	62.01	1.94	NORTH INCORPORATED LIMITS CEDAR CITY	11,450	11,170	12,150
	62.01	62.23	0.22	NORTH CEDAR INTERCHANGE	11,880	11,590	12,600
	62.23	63.16	0.93	NORTHWEST INCORPORATED LIMITS CEDAR CITY	11,880	11,590	12,600
	63.16	70.37	7.21	NORTH URBAN BOUNDARY CEDAR CITY	11,880	11,590	12,600
	70.37	75.32	4.95	SUMMIT INTERCHANGE	11,265	10,990	11,950
	75.32	77.93	2.61	SOUTH PAROWAN INTERCHANGE	9,990	9,750	10,600
	77.93	82.39	4.46	NORTH PAROWAN INTERCHANGE	10,970	10,700	11,640
	82.39	94.61	12.22	PARAGONAH INTERCHANGE	10,775	10,340	11,870
	94.61	99.85	5.24	JUNCTION SR 20 BEAR VALLEY JUNCTION	11,500	11,030	12,660
	99.85	101.35	1.50	RANCH EXIT	11,500	11,030	12,660
	101.35	108.93	7.58	IRON - BEAVER COUNTY LINE	11,500	11,030	12,660
	108.93	111.90	2.97	SOUTH BEAVER INTERCHANGE	9,420	9,040	10,370
	111.90	111.98	0.08	SOUTH INCORPORATED LIMITS BEAVER	9,420	9,040	10,370
	111.98	120.28	8.30	NORTH BEAVER INTERCHANGE	10,565	10,100	11,720
	120.28	125.13	4.85	MANDERFIELD INTERCHANGE	10,725	10,250	11,900
	125.13	129.59	4.46	PINECREEK INTERCHANGE	10,670	10,200	11,840
	129.59	131.98	2.39	SULPHURDALE INTERCHANGE	10,720	10,250	11,890
	131.98	132.32	0.34	BEAVER - MILLARD COUNTY LINE	10,720	10,250	11,890
	132.32	135.01	2.69	JUNCTION FAI 70	8,060	7,710	8,940
	135.01	138.21	3.20	NORTH COVE FORT INTERCHANGE	8,200	7,840	9,100
	138.21	146.64	8.43	DOG VALLEY INTERCHANGE	8,060	7,710	8,940
	146.64	158.41	11.77	SOUTH KANOSH INTERCHANGE	8,040	7,690	8,920
	158.41	163.49	5.08	MEADOW INTERCHANGE	9,745	9,320	10,810
	163.49	163.66	0.17	SOUTH FILLMORE INTERCHANGE	8,200	7,840	9,100
	163.66	165.73	2.07	SOUTH INCORPORATED LIMITS FILLMORE	8,200	7,840	9,100
	165.73	166.86	1.13	NORTH INCORPORATED LIMITS FILLMORE	8,200	7,840	9,100

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	166.86	173.63	6.77	NORTH FILLMORE INTERCHANGE	8,855	8,470	9,830
	173.63	178.45	4.82	SOUTH HOLDEN INTERCHANGE	7,500	7,170	8,320
	178.45	183.75	5.30	NORTH HOLDEN INTERCHANGE	8,435	8,070	9,360
	183.75	188.54	4.79	RANCH EXIT	8,435	8,070	9,360
	188.54	194.23	5.69	SCIPIO INTERCHANGE	9,275	8,950	10,090
	194.23	202.27	8.04	MILLARD - JUAB COUNTY LINE	9,275	8,950	10,090
	202.27	206.63	4.36	YUBA STATE PARK INTERCHANGE	9,350	9,020	10,180
	206.63	222.90	16.27	MILLS INTERCHANGE SR 78	8,970	8,650	9,760
	222.90	225.34	2.44	SOUTH NEPHI INTERCHANGE	9,870	9,270	11,360
	225.34	228.16	2.82	SALT CREEK INTERCHANGE	11,375	10,690	13,100
	228.16	233.24	5.08	NORTH NEPHI INTERCHANGE	14,510	13,630	16,710
	233.24	241.61	8.37	MONA INTERCHANGE	14,645	13,760	16,860
	241.61	242.55	0.94	JUAB - UTAH COUNTY LINE	14,645	13,760	16,860
	242.55	244.17	1.62	SOUTH SANTAQUIN INTERCHANGE	14,765	13,870	17,000
	244.17	244.76	0.59	SOUTH INCORPORATED LIMITS SANTAQUIN	14,765	13,870	17,000
	244.76	244.92	0.16	NORTH INCORPORATED LIMITS SANTAQUIN	14,765	13,870	17,000
	244.92	248.27	3.35	NORTH SANTAQUIN INTERCHANGE	18,175	17,960	18,710
	248.27	248.95	0.68	SOUTH WEST URBAN BOUNDARY PAYSON	18,175	17,960	18,710
	248.95	249.73	0.78	SOUTH PAYSON INTERCHANGE	19,205	18,980	19,770
	249.73	250.70	0.97	WEST INCORPORATED LIMITS PAYSON	19,205	18,980	19,770
	250.70	251.05	0.35	NORTH INC. LIMITS PAYSON NORTH URBAN BOUNDARY	19,205	18,980	19,770
	251.05	253.68	2.63	PAYSON INTERCHANGE SR 115	28,130	27,800	28,960
	253.68	254.35	0.67	SALEM INTERCHANGE SR 164	27,725	27,400	28,540
	254.35	256.99	2.64	SOUTHWEST URBANIZED BOUNDARY	27,725	27,400	28,540
	256.99	257.38	0.39	SOUTH INCORPORATED LIMITS SPANISH FORK	27,725	27,400	28,540
	257.38	257.90	0.52	SPANISH FORK INTERCHANGE	40,665	40,180	41,870
	257.90	258.82	0.92	MOARK INTERCHANGE	49,300	48,780	50,820
	258.82	259.92	1.10	NORTH INCORPORATED LIMITS SPANISH FORK	49,300	48,780	50,820
	259.92	260.08	0.16	SOUTH INCORPORATED LIMITS SPRINGVILLE	49,300	48,780	50,820

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	260.08	261.93	1.85	SPRINGVILLE INTERCHANGE	56,665	56,000	58,340
	261.93	261.96	0.03	IRONTON INTERCHANGE SR 75	63,900	63,140	65,790
	261.96	263.15	1.19	NORTH INCORPORATED LIMITS SPRINGVILLE	63,900	63,140	65,790
	263.15	263.59	0.44	SOUTH INCORPORATED LIMITS PROVO	63,900	63,140	65,790
	263.59	265.72	2.13	UNIVERSITY AVENUE INTERCHANGE	52,860	52,240	54,420
	265.72	267.58	1.86	CENTER STREET INTERCHANGE	71,005	76,530	57,200
	267.58	268.61	1.03	NORTH INCORPORATED LIMITS PROVO	71,005	76,530	57,200
	268.61	269.19	0.58	SOUTH INCORPORATED LIMITS OREM	71,005	76,530	57,200
	269.19	270.79	1.60	1200 SOUTH INTERCHANGE OREM	80,380	86,630	64,760
	270.79	271.81	1.02	CENTER STREET INTERCHANGE OREM	81,140	87,450	65,370
	271.81	272.91	1.10	800 NORTH INTERCHANGE OREM	82,150	88,540	66,180
	272.91	275.82	2.91	N. INC. LIMITS OREM & S. INC. LIMITS LINDON 1600 NORTH INT.	78,125	84,200	62,940
	275.82	276.26	0.44	WEST INCORPORATED LIMITS LINDON	78,125	84,200	62,940
	276.26	276.62	0.36	EAST INCORPORATED LIMITS AMERICAN FORK	78,125	84,200	62,940
	276.62	278.72	2.10	500 EAST INTERCHANGE AMERICAN FORK	65,160	70,230	52,500
	278.72	279.09	0.37	N.W. INC. LIMITS AMERICAN FORK & W. AMERICAN FORK INT.	75,050	80,880	60,460
	279.09	282.46	3.37	SOUTHEAST INC. LIMITS LEHI & SOUTH LEHI INTERCHANGE	68,775	74,120	55,410
	282.46	284.14	1.68	NORTHWEST INC. LIMITS LEHI & NORTH LEHI INTERCHANGE	74,225	80,000	59,800
	284.14	284.62	0.48	ALPINE INTERCHANGE SR 92	75,580	81,460	60,890
	284.62	286.06	1.44	NORTH URBAN BOUNDARY	75,580	81,460	60,890
	286.06	288.43	2.37	SALT LAKE URBAN BOUNDARY LINE	75,580	81,460	60,890
	288.43	291.53	3.10	BLUFFDALE INTERCHANGE	75,855	79,280	67,290
	291.53	292.76	1.23	DRAPER INTERCHANGE	88,335	92,320	78,360
	292.76	293.78	1.02	NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	88,335	92,320	78,360
	293.78	295.80	2.02	10600 SOUTH INTERCHANGE	116,400	121,660	103,260
	295.80	296.57	0.77	9000 SOUTH INTERCHANGE	149,945	156,720	133,020
	296.57	298.11	1.54	NORTH INC. LIMITS SANDY & SOUTH INC. LIMITS MIDVALE	149,945	156,720	133,020
	298.11	298.63	0.52	7200 SOUTH INTERCHANGE	177,720	185,750	157,650
	298.63	299.19	0.56	NORTH INC. LIMITS MIDVALE & SOUTH INC. LIMITS MURRAY	177,720	185,750	157,650

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	299.19	300.51	1.32	FAI 215 JUNCTION	129,985	141,440	101,350
	300.51	301.88	1.37	5300 SOUTH INTERCHANGE IN MURRAY	142,215	154,750	110,880
	301.88	302.51	0.63	4500 SOUTH INTERCHANGE	152,020	165,420	118,530
	302.51	303.65	1.14	NORTH INCORPORATED LIMITS MURRAY	152,020	165,420	118,530
	303.65	304.85	1.20	(33RD SOUTH INT.) SOUTH INC. LIMITS SOUTH SALT LAKE	165,615	180,210	129,130
	304.85	305.42	0.57	JUNCTION FAI 80 EAST	195,395	212,610	152,350
	305.42	306.55	1.13	2100 S. INT. (N. INC. LIMITS S. SALT LAKE & S. INC. LIMITS S.L.C.)	179,050	196,560	135,270
	306.55	307.70	1.15	1300 SOUTH INTERCHANGE	155,595	170,810	117,550
	307.70	308.17	0.47	500 AND 600 SOUTH CONNECTION	118,255	129,820	89,340
	308.17	309.58	1.41	JUNCTION FAI 80 WEST	96,070	105,470	72,580
	309.58	310.49	0.91	600 NORTH INTERCHANGE	75,785	83,200	57,250
	310.49	312.12	1.63	1100 NORTH INTERCHANGE	79,360	87,120	59,950
	312.12	312.58	0.46	BECK STREET INTERCHANGE	110,930	121,780	83,800
	312.58	313.38	0.80	SALT LAKE - DAVIS COUNTY LINE & S. INC. LIMITS N. SALT LAKE	110,930	121,780	83,800
	313.38	315.52	2.14	JUNCTION FAI 215	119,685	131,390	90,420
	315.52	317.15	1.63	WOODS CROSS INTERCHANGE	104,890	115,150	79,240
	317.15	317.82	0.67	500 SOUTH INTERCHANGE	96,475	105,910	72,880
	317.82	318.30	0.48	400 NORTH INTERCHANGE IN WEST BOUNTIFUL	83,275	91,420	62,910
	318.30	318.75	0.45	1000 NORTH INTERCHANGE & NORTH INC. LIMITS BOUNTIFUL	98,655	108,300	74,530
	318.75	319.77	1.02	NORTH INC. LIMITS BOUNTIFUL & S. INC. LIMITS CENTERVILLE	98,655	108,300	74,530
	319.77	321.88	2.11	CENTERVILLE INTERCHANGE	101,835	109,160	83,530
	321.88	323.18	1.30	NORTH INCORPORATED LIMITS CENTERVILLE	101,835	109,160	83,530
	323.18	323.61	0.43	FARMINGTON EXIT	92,610	99,270	75,970
	323.61	324.46	0.85	SOUTH INCORPORATED LIMITS FARMINGTON	92,610	99,270	75,970
	324.46	324.69	0.23	LAGOON JUNCTION	59,800	64,100	49,050
	324.69	326.03	1.34	BURKE LANE EXIT	67,095	71,920	55,040
	326.03	326.88	0.85	NORTH INC. LIMITS FARMINGTON & SOUTH URBAN BOUNDARY	67,095	71,920	55,040
	326.88	328.93	2.05	SOUTH INCORPORATED LIMITS KAYSVILLE	67,095	71,920	55,040
	328.93	329.54	0.61	JUNCTION SR 273 IN KAYSVILLE	73,755	79,060	60,500

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	329.54	330.30	0.76	NORTH INC. LIMITS KAYSVILLE & SOUTH INC. LIMITS LAYTON	73,755	79,060	60,500
	330.30	331.88	1.58	SOUTH LAYTON INTERCHANGE	64,385	69,010	52,810
	331.88	333.17	1.29	NORTH LAYTON INTERCHANGE SR 232	65,485	70,190	53,720
	333.17	333.48	0.31	SYRACUSE INTERCHANGE SR 108	70,995	76,100	58,240
	333.48	334.38	0.90	NORTH INC. LIMITS LAYTON& SOUTH INC. LIMITS CLEARFIELD	70,995	76,100	58,240
	334.38	336.12	1.74	CLEARFIELD INTERCHANGE SR 193	78,195	83,820	64,140
	336.12	336.22	0.10	SUNSET INTERCHANGE SR 103	88,230	94,570	72,370
	336.22	338.02	1.80	NORTH INC. LIMITS CLEARFIELD & SOUTH INC. LIMITS SUNSET	88,230	94,570	72,370
	338.02	338.78	0.76	DAVIS - WEBER COUNTY LINE & NORTH INC. LIMITS SUNSET	88,230	94,570	72,370
	338.78	339.15	0.37	ROY INTERCHANGE SR 97	81,370	87,220	66,750
	339.15	339.45	0.30	NORTHEAST INC. LIMITS ROY & S.W. INC. LIMITS RIVERDALE	81,370	87,220	66,750
	339.45	340.54	1.09	RIVERDALE ROAD INTERCHANGE	63,385	67,940	51,990
	340.54	341.69	1.15	JUNCTION FAI 84	70,575	75,410	58,490
	341.69	342.27	0.58	NORTHEAST INC. LIMITS RIVERDALE & S.W. INC. LIMITS OGDEN	70,575	75,410	58,490
	342.27	343.41	1.14	31ST STREET INTERCHANGE IN OGDEN	71,725	76,640	59,450
	343.41	344.19	0.78	24TH STREET INTERCHANGE IN OGDEN	59,070	63,120	48,960
	344.19	345.31	1.12	WILSON LANE INTERCHANGE	55,235	59,020	45,780
	345.31	347.07	1.76	12TH STREET INTERCHANGE SR 39	48,190	51,490	39,940
	347.07	349.19	2.12	NORTH OGDEN INTERCHANGE 450 NORTH	43,370	46,340	35,940
	349.19	349.71	0.52	SOUTH INCORPORATED LIMITS PLEASANT VIEW	43,370	46,340	35,940
	349.71	350.24	0.53	PLAIN CITY INTERCHANGE 27TH NORTH	37,420	39,980	31,010
	350.24	351.75	1.51	SOUTH INCORPORATED LIMITS PLEASANT VIEW	37,420	39,980	31,010
	351.75	352.18	0.43	WEBER-BOX ELDER COUNTY LINE&N.INC. LIMITS PLEASANTVIEW	37,420	39,980	31,010
	352.18	355.47	3.29	HOT SPRINGS INTERCHANGE	35,500	37,930	29,420
	355.47	357.93	2.46	SOUTH INCORPORATED LIMITS WILLARD	35,500	37,930	29,420
	357.93	359.18	1.25	NORTH WILLARD INTERCHANGE	33,560	35,860	27,810
	359.18	360.05	0.87	NORTH INCORPORATED LIMITS WILLARD	33,560	35,860	27,810
	360.05	362.26	2.21	SOUTH INCORPORATED LIMITS PERRY	33,560	35,860	27,810
	362.26	362.39	0.13	NORTH INCORPORATED LIMITS PERRY	33,560	35,860	27,810

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00015	362.39	365.91	3.52		SOUTH BRIGHAM INTERCHANGE	20,880	22,310	17,310
	365.91	371.79	5.88		NORTH BRIGHAM INTERCHANGE	19,740	21,090	16,360
	371.79	373.13	1.34		SOUTHEAST INCORPORATED LIMITS HONEYVILLE	19,740	21,090	16,360
	373.13	374.25	1.12		HONEYVILLE INTERCHANGE	17,420	18,610	14,440
	374.25	375.32	1.07		NORTHWEST INCORPORATED LIMITS HONEYVILLE	17,420	18,610	14,440
	375.32	376.94	1.62		SOUTHEAST INCORPORATED LIMITS ELWOOD	17,420	18,610	14,440
	376.94	378.16	1.22		ELWOOD INTERCHANGE	13,865	14,810	11,490
	378.16	378.76	0.60		MALAD RIVER NORTHWEST INCORPORATED LIMITS ELWOOD	13,865	14,810	11,490
	378.76	380.35	1.59		SOUTHEAST INCORPORATED LIMITS TREMONTON	13,865	14,810	11,490
	380.35	381.49	1.14		ON RAMP FROM FAI 84	12,068	12,890	10,000
	381.49	385.73	4.24		GARLAND INTERCHANGE & NORTH INC. LIMITS TREMONTON	10,070	10,760	8,350
	385.73	392.88	7.15		RIVERSIDE INTERCHANGE	7,405	7,220	7,860
	392.88	399.32	6.44		PLYMOUTH INTERCHANGE	7,150	6,970	7,590
	399.32	401.07	1.75		PORTAGE INTERCHANGE - UTAH - IDAHO STATE LINE	6,900	6,730	7,320
A00016	**0.00**	**9.74**	**9.74**	*	**UTAH - WYOMING STATE LINE**	**770**	**740**	**850**
	9.74	10.37	0.63		SOUTHEAST INCORPORATED LIMITS WOODRUFF	1,395	1,340	1,540
	10.37	10.64	0.27		JUNCTION SR 39 IN WOODRUFF	960	920	1,060
	10.64	19.84	9.20		NORTH INCORPORATED LIMITS WOODRUFF	1,400	1,340	1,550
	19.84	20.86	1.02		SOUTH INCORPORATED LIMITS RANDOLPH	1,240	1,190	1,370
	20.86	29.04	8.18		NORTH INCORPORATED LIMITS RANDOLPH - JUNCTION SR 30	1,575	1,510	1,740
A00017	**0.00**	**0.85**	**0.85**	*	**JUNCTION SR 9**	**3,035**	**2,910**	**3,350**
	0.85	4.57	3.72		NORTH INC. LIMITS LAVERKIN & S. INC. LIMITS TOQUERVILLE	2,385	2,280	2,640
	4.57	6.03	1.46		NORTH INC. LIMITS TOQUERVILLE - FAI 15 ANDERSON JUNCTION	2,140	2,050	2,360
A00018	**0.00**	**1.45**	**1.45**	*	**JUNCTION FAI 15**	**17,355**	**18,550**	**14,370**
	1.45	2.10	0.65		400 SOUTH IN ST. GEORGE	30,690	32,800	25,420
	2.10	3.18	1.08		100 NORTH STREET SR 34	36,420	38,920	30,160
	3.18	4.23	1.05		JUNCTION FAU 4002 SANTA CLARA ROAD	6,955	7,430	5,760
	4.23	6.66	2.43		NORTH INCORPORATED LIMITS ST. GEORGE	4,105	4,420	3,310
	6.66	11.17	4.51		NORTH URBAN BOUNDARY	4,105	4,420	3,310

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00018	11.17	20.10	8.93		JUNCTION SR 300 DIXIE STATE PARK	3,145	3,010	3,480
	20.10	26.72	6.62		VEYO	2,105	2,020	2,330
	26.72	40.20	13.48		CENTRAL	1,700	1,630	1,880
	40.20	40.23	0.03		SOUTHEAST INCORPORATED LIMITS ENTERPRISE	1,700	1,630	1,880
	40.23	40.37	0.14		JUNCTION SR 219	1,185	1,140	1,310
	40.37	43.62	3.25		NORTHEAST INCORPORATED LIMITS ENTERPRISE	1,185	1,140	1,310
	43.62	50.86	7.24		WASHINGTON - IRON COUNTY LINE - SR 56 BERYL JUNCTION	1,125	1,080	1,240
A00019	**0.00**	**0.25**	**0.25**	*	**JUNCTION FAI 70**	**3,065**	**3,100**	**2,970**
	0.25	1.97	1.72		WEST INCORPORATED LIMITS GREEN RIVER	4,860	4,920	4,710
	1.97	3.21	1.24		EMERY - GRAND COUNTY LINE	3,105	3,140	3,010
	3.21	4.58	1.37		EAST INCORPORATED LIMITS GREEN RIVER - JUNCTION FAI 70	3,595	3,640	3,490
A00020	**0.00**	**17.51**	**17.51**	*	**JUNCTION FAI 15 NORTH OF PAROWAN**	**1,380**	**1,320**	**1,530**
	17.51	20.69	3.18		IRON - GARFIELD COUNTY LINE - JUNCTION SR 89 AT ORTON	1,380	1,320	1,530
A00021	**0.00**	**1.53**	**1.53**	*	**NEVADA - UTAH STATE LINE**	**200**	**200**	**190**
	1.53	29.90	28.37		GARRISON	195	200	190
	29.90	76.44	46.54		MILLARD - BEAVER COUNTY LINE	325	330	320
	76.44	76.89	0.45		WEST INCORPORATED LIMITS MILFORD	610	620	590
	76.89	77.72	0.83		JUNCTION SR 257 IN MILFORD	2,630	2,520	2,910
	77.72	90.18	12.46		EAST INCORPORATED LIMITS MILFORD	1,425	1,370	1,570
	90.18	96.12	5.94		JUNCTION SR 130 NORTH OF MINERSVILLE	1,095	1,130	1,010
	96.12	106.79	10.67		JUNCTION SR 310 MINERSVILLE STATE PARK	1,095	1,130	1,010
	106.79	107.27	0.48		WEST INCORPORATED LIMITS BEAVER - JUNCTION SR 160	2,980	3,070	2,750
A00022	**0.00**	**4.49**	**4.49**	*	**ANTIMONY**	**510**	**520**	**490**
	4.49	6.87	2.38		GARFIELD - PIUTE COUNTY LINE - JUNCTION SR 62 OTTER CREEK	510	520	490
A00023	**0.00**	**1.55**	**1.55**	*	**JUNCTION SR 91**	**750**	**760**	**730**
	1.55	2.53	0.98		JUNCTION SR 101 IN WELLSVILLE	1,590	1,610	1,540
	2.53	6.23	3.70		NORTH INCORPORATED LIMITS WELLSVILLE	1,010	1,020	980
	6.23	8.58	2.35		SOUTH INCORPORATED LIMITS MENDON	1,490	1,510	1,450
	8.58	9.91	1.33		NORTH INCORPORATED LIMITS MENDON	1,460	1,480	1,420

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00023	9.91	17.42	7.51		JUNCTION SR 30	1,615	1,630	1,570
	17.42	17.99	0.57		SOUTH INCORPORATED LIMITS NEWTON	1,055	1,070	1,020
	17.99	18.97	0.98		JUNCTION SR 142 IN NEWTON	1,415	1,430	1,370
	18.97	19.12	0.15		EAST INCORPORATED LIMITS NEWTON	1,415	1,430	1,370
	19.12	22.08	2.96		JUNCTION SR 218	1,075	1,090	1,040
	22.08	24.16	2.08		SOUTH INCORPORATED LIMITS TRENTON	1,075	1,090	1,040
	24.16	25.72	1.56		JUNCTION SR 142 IN TRENTON	1,555	1,570	1,510
	25.72	28.12	2.40		NORTH INC. LIMITS TRENTON & SOUTH INC. LIMITS CORNISH	1,465	1,480	1,420
	28.12	29.72	1.60		JUNCTION SR 61 IN CORNISH - UTAH - IDAHO STATE LINE	1,000	1,010	970
A00024	**0.00**	**1.59**	**1.59**	*	**JUNCTION SR 50 EAST OF SALINA**	**735**	**780**	**620**
	1.59	3.66	2.07		WEST INCORPORATED LIMITS SALINA	735	780	620
	3.66	4.31	0.65		WEST INCORPORATED LIMITS AURORA	735	780	620
	4.31	5.33	1.02		SOUTH INCORPORATED LIMITS AURORA	735	780	620
	5.33	7.75	2.42		JUNCTION SR 260 TO AURORA	840	890	710
	7.75	7.90	0.15		ROAD TO SIGURD INTERCHANGE	2,215	2,360	1,860
	7.90	8.16	0.26		NORTH INCORPORATED LIMITS SIGURD	2,215	2,360	1,860
	8.16	10.61	2.45		JUNCTION SR 118 IN SIGURD	1,360	1,300	1,500
	10.61	16.06	5.45		SOUTH INCORPORATED LIMITS SIGURD	745	710	820
	16.06	32.43	16.37		JUNCTION SR 119 EAST OF GLENWOOD	1,130	1,080	1,250
	32.43	37.14	4.71		JUNCTION SR 62	715	680	790
	37.14	39.23	2.09		SEVIER - PIUTE COUNTY LINE	715	680	790
	39.23	40.96	1.73		JUNCTION SR 25	915	880	1,010
	40.96	51.80	10.84		PIUTE - WAYNE COUNTY LINE	915	880	1,010
	51.80	53.03	1.23		JUNCTION SR 72 (NORTH INCORPORATED LIMITS LOA AT 51.86)	1,450	1,390	1,600
	53.03	60.13	7.10		EAST INCORPORATED LIMITS LOA	1,045	1,000	1,150
	60.13	61.12	0.99		WEST INCORPORATED LIMITS BICKNELL	1,440	1,380	1,590
	61.12	68.38	7.26		EAST INCORPORATED LIMITS BICKNELL	1,260	1,210	1,390
	68.38	69.21	0.83		WEST INCORPORATED LIMITS TORREY	990	950	1,090
	69.21	69.89	0.68		EAST INCORPORATED LIMITS TORREY	540	520	600

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00024	69.89	73.71	3.82		JUNCTION SR 12	540	520	600
	73.71	88.06	14.35		WEST BOUNDARY CAPITOL REEF NATIONAL PARK	350	340	390
	88.06	117.02	28.96		EAST BOUNDARY CAPITOL REEF NATIONAL PARK	245	230	270
	117.02	126.35	9.33		JUNCTION SR 95 IN HANKSVILLE	260	250	290
	126.35	136.64	10.29		WAYNE - EMERY COUNTY LINE	245	230	270
	136.64	161.03	24.39		ROAD TO GOBLIN VALLEY - FAI 70	345	330	380
A00025	**0.00**	**2.84**	**2.84**	*	**JUNCTION SR 24 WEST OF LOA**	**405**	**410**	**390**
	2.84	10.01	7.17		PIUTE - SEVIER COUNTY LINE - BOWERY CAMPGROUND	405	410	390
A00026	**0.00**	**0.41**	**0.41**	*	**JUNCTION SR 126**	**23,110**	**24,900**	**18,630**
	0.41	0.98	0.57		JUNCTION FAI 15 VIA RIVERDALE ROAD	25,995	27,780	21,530
	0.98	1.33	0.35		JUNCTION FAI 84 VIA RIVERDALE ROAD	35,930	38,400	29,760
	1.33	2.93	1.60		JUNCTION SR 60	39,690	42,420	32,870
	2.93	3.03	0.10		NORTH INC. LIMITS RIVERDALE & S. INC. LIMITS SOUTH OGDEN	39,690	42,420	32,870
	3.03	3.54	0.51		JUNCTION SR 204 WALL AVENUE	16,090	17,200	13,330
	3.54	3.68	0.14		S. INC. LIMITS OGDEN - JUNCTION SR 89 WASHINGTON BLVD.	16,090	17,200	13,330
A00028	**0.00**	**1.14**	**1.14**	*	**JUNCTION SR 89**	**3,250**	**3,370**	**2,960**
	1.14	3.87	2.73		NORTH INCORPORATED LIMITS GUNNISON	3,250	3,370	2,960
	3.87	16.00	12.13		ROAD TO FAYETTE	2,265	2,350	2,060
	16.00	29.46	13.46		SANPETE - JUAB COUNTY LINE	2,265	2,350	2,060
	29.46	30.14	0.68		SOUTH INCORPORATED LIMITS LEVAN	3,140	3,100	3,230
	30.14	30.35	0.21		JUNCTION SR 78 IN LEVAN	3,195	3,160	3,290
	30.35	39.03	8.68		NORTH INCORPORATED LIMITS LEVAN - JUNCTION SR 41	3,225	3,190	3,320
A00029	**0.00**	**9.47**	**9.47**	*	**WEST CAMP MARINA**	**410**	**410**	**400**
	9.47	14.79	5.32		MANTI LA SAL NATIONAL FOREST BOUNDARY	995	1,010	970
	14.79	17.60	2.81		JUNCTION SR 57	2,380	2,410	2,310
	17.60	17.84	0.24		NORTH INCORPORATED LIMITS ORANGEVILLE	2,750	2,780	2,670
	17.84	18.12	0.28		JUNCTION OLD SR 57 IN ORANGEVILLE	6,140	6,210	5,960
	18.12	18.69	0.57		EAST INCORPORATED LIMITS ORANGEVILLE	3,940	3,990	3,820
	18.69	20.01	1.32		WEST INCORPORATED LIMITS CASTLEDALE	3,940	3,990	3,820

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00029	20.01	21.75	1.74		EAST INCORPORATED LIMITS CASTLEDALE - JUNCTION SR 10	3,940	3,990	3,820
A00030	**0.00**	**50.24**	**50.24**	*	**NEVADA - UTAH STATE LINE**	**215**	**210**	**240**
	50.24	74.65	24.41		ROSETTE	230	220	250
	74.65	90.56	15.91		JUNCTION SR 42 CURLEW JUNCTION - FAI 84	405	390	450
	90.57	91.84	1.28	*	JUNCTION FAI 15	6,160	5,900	6,810
	91.84	93.10	1.26		JUNCTION SR 13 AT RIVERSIDE	5,880	5,630	6,500
	93.10	94.90	1.80		JUNCTION SR 81 SOUTH OF FIELDING	5,260	5,040	5,810
	94.90	99.47	4.57		JUNCTION SR 38 SOUTH OF FIELDING	5,260	5,040	5,810
	99.47	102.30	2.83		BOX ELDER - CACHE COUNTY LINE	5,260	5,040	5,810
	102.30	106.41	4.11		JUNCTION SR 23	6,010	5,760	6,640
	106.41	108.68	2.27		LOGAN WEST URBANIZED BOUNDARY	8,600	9,270	6,930
	108.68	109.95	1.27		WEST INCORPORATED LIMITS LOGAN-SR 91	8,600	9,270	6,930
	109.96	113.12	3.17	*	JUNCTION SR 89 GARDEN CITY	1,875	1,800	2,070
	113.12	120.10	6.98		SOUTH INCORPORATED LIMITS GARDEN CITY	1,310	1,250	1,450
	120.10	131.95	11.85		JUNCTION LOCAL ROAD NORTH OF LAKETOWN	450	430	500
	131.95	135.73	3.78		JUNCTION SR 16 - UTAH - WYOMING STATE LINE	760	730	840
A00031	**0.00**	**0.78**	**0.78**	*	**JUNCTION SR 89**	**1,675**	**1,700**	**1,620**
	0.78	4.35	3.57		EAST INCORPORATED LIMITS FAIRVIEW	1,350	1,370	1,310
	4.35	8.54	4.19		NATIONAL FOREST BOUNDARY	1,350	1,370	1,310
	8.54	13.39	4.85		SR 264 ROAD TO SCOFIELD	560	570	540
	13.39	13.99	0.60		ROAD TO FAIRVIEW RESERVOIR	465	470	450
	13.99	18.61	4.62		ROAD TO BEAVER DAM RESERVOIR	465	470	450
	18.61	20.98	2.37		SANPETE EMERY COUNTY LINE	470	480	460
	20.98	33.06	12.08		ROAD TO ELECTRIC LAKE	715	720	690
	33.06	37.70	4.64		ROAD TO CRANDALL CANYON	1,255	1,270	1,220
	37.70	38.31	0.61		MANTI LA SAL NATIONAL FOREST BOUNDARY	1,400	1,420	1,360
	38.31	40.10	1.79		ROAD TO BEAR CREEK CANYON	1,825	1,850	1,770
	40.10	46.99	6.89		ROAD TO DEER CREEK CANYON POWER STATION	3,655	3,700	3,550
	46.99	47.71	0.72		NORTHWEST INC. LIMITS HUNTINGTON - JUNCTION SR 10	4,375	4,430	4,240

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00032	**0.00**	**9.02**	**9.02**	*	**JUNCTION SR 40**	**1,305**	**1,320**	**1,270**
	9.02	9.44	0.42		WASATCH - SUMMIT COUNTY LINE	1,305	1,320	1,270
	9.44	10.37	0.93		WEST INCORPORATED LIMITS FRANCIS	2,050	2,070	1,990
	10.37	12.00	1.63		JUNCTION SR 35 IN FRANCIS	2,545	2,580	2,470
	12.00	12.40	0.40		NORTH INC. LIMITS FRANCIS & SOUTH INC. LIMITS KAMAS	3,040	3,080	2,950
	12.40	12.62	0.22		JUNCTION SR 248	3,040	3,080	2,950
	12.62	13.20	0.58		JUNCTION SR 150 IN KAMAS	4,050	3,880	4,480
	13.20	17.37	4.17		NORTH INCORPORATED LIMITS KAMAS	2,530	2,420	2,800
	17.37	18.77	1.40		EAST INCORPORATED LIMITS OAKLEY	2,630	2,520	2,910
	18.77	21.88	3.11		NORTH INCORPORATED LIMITS OAKLEY	2,300	2,200	2,540
	21.88	28.42	6.54		JUNCTION LOCAL ROAD NORTH OF PEOA	2,100	2,010	2,320
	28.42	28.82	0.40		JUNCTION FAI 80	2,445	2,470	2,370
	28.82	28.95	0.13		JUNCTION LOCAL ROAD - FAI 80	925	1,000	750
A00034	**0.00**	**0.57**	**0.57**	*	**JUNCTION SR 18**	**20,745**	**22,170**	**17,180**
	0.57	1.39	0.82		MAIN STREET IN ST. GEORGE	33,735	36,050	27,940
	1.39	1.74	0.35		700 EAST	35,530	37,970	29,430
	1.74	2.05	0.31		INDUSTRIAL ROAD	28,210	30,150	23,360
	2.05	2.16	0.11		FAI 15 - RIVER ROAD	20,970	2,260	16,910
A00035	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 32**	**1,245**	**1,260**	**1,210**
	1.10	9.52	8.42		EAST INCORPORATED LIMITS OF FRANCIS	1,115	1,130	1,080
	9.52	28.02	18.50		SUMMIT - WASATCH COUNTY LINE	280	280	270
	28.02	35.44	7.42		WASATCH - DUCHESNE COUNTY LINE	280	280	270
	35.44	42.76	7.32		HANNA	280	280	270
	42.76	45.46	2.70		TABIONA	430	440	420
	45.46	62.49	17.03		JUNCTION SR 208 - JUNCTION SR 87	280	300	230
A00036	**0.00**	**1.36**	**1.36**	*	**JUNCTION SR 6**	**155**	**150**	**170**
	1.36	6.40	5.04		JUNCTION SOUTH LEG OF SR 36	325	310	360
	6.40	21.46	15.06		JUAB - TOOELE COUNTY LINE	325	310	360
	21.46	22.80	1.34		SOUTHEAST INCORPORATED LIMITS VERNON	320	310	350

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00036	22.80	38.90	16.10		NORTH INCORPORATED LIMITS VERNON	320	310	350
	38.90	42.62	3.72		JUNCTION SR 199	1,655	1,590	1,830
	42.62	47.47	4.85		JUNCTION SR 73	3,315	3,180	3,660
	47.47	48.40	0.93		SOUTH INCORPORATED LIMITS STOCKTON	4,080	3,910	4,510
	48.40	51.49	3.09		NORTH INCORPORATED LIMITS STOCKTON	4,080	3,910	4,510
	51.49	52.60	1.11		JUNCTION LOCAL ROAD TO TOOELE ARMY DEPOT	9,160	9,050	9,430
	52.60	53.88	1.28		SOUTH INC. LIMITS & SOUTH URBAN BOUNDARY TOOELE	8,745	9,350	7,240
	53.88	54.40	0.52		300 SOUTH IN TOOELE	15,885	16,980	13,160
	54.40	54.65	0.25		VINE STREET IN TOOELE	23,335	24,940	19,330
	54.65	54.95	0.30		100 NORTH SR 112	21,725	23,220	17,990
	54.95	56.92	1.97		200 NORTH IN TOOELE	11,295	12,070	9,350
	56.92	57.24	0.32		NORTH INCORPORATED LIMITS TOOELE	11,295	12,070	9,350
	57.24	63.03	5.79		NORTH URBAN BOUNDARY OF TOOELE	10,155	10,030	10,460
	63.03	65.77	2.74		JUNCTION SR 138 MILLS JUNCTION	10,950	10,820	11,280
	65.77	66.39	0.62		TRUCK STOP SERVICE CENTER - FAI 80	12,300	12,150	12,670
	66.40	67.43	1.04	*	JUNCTION SR 6 - JUNCTION SR 36	350	340	390
A00037	**0.00**	**0.52**	**0.52**	*	**JUNCTION SR 126 IN SUNSET**	**9,015**	**8,800**	**9,560**
	0.52	1.99	1.47		WEST INC. LIMITS SUNSET & EAST INC. LIMITS CLINTON	7,110	6,940	7,540
	1.99	2.49	0.50		JUNCTION SR 108 2000 WEST VIA 1800 NORTH	7,110	6,940	7,540
	2.49	3.50	1.01		OLD WEST URBAN BOUNDARY	1,880	1,830	1,990
	3.50	5.88	2.38		WEST INCORPORATED LIMITS CLINTON	1,380	1,350	1,460
	5.88	6.65	0.77		DAVIS - WEBER COUNTY LINE	1,515	1,530	1,470
	6.65	9.45	2.80		JUNCTION SR 98 IN HOOPER	1,825	1,850	1,770
	9.45	9.97	0.52		WEST HAVEN WEST INCORPORATED LIMITS	1,825	1,850	1,770
	9.97	11.97	2.00		JUNCTION SR 134 KANESVILLE	3,370	3,410	3,270
	11.97	12.29	0.32		OGDEN URBAN BOUNADRY - SR 108	3,370	3,410	3,270
A00038	**0.00**	**0.28**	**0.28**	*	**JUNCTION SR 13**	**4,710**	**4,600**	**4,990**
	0.28	1.03	0.75		NORTH INCORPORATED LIMITS BRIGHAM CITY	3,820	3,730	4,050
	1.03	5.89	4.86		NORTH URBAN BOUNDARY	3,820	3,730	4,050

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00038	5.89	8.31	2.42		SOUTH INCORPORATED LIMITS HONEYVILLE	2,925	2,960	2,840
	8.31	10.85	2.54		JUNCTION SR 240	2,400	2,430	2,330
	10.85	14.03	3.18		NORTH INCORPORATED LIMITS HONEYVILLE	2,390	2,420	2,320
	14.03	14.16	0.13		JUNCTION SR 102	4,455	4,510	4,320
	14.16	19.09	4.93		NORTH INCORPORATED LIMITS DEWEYVILLE - JUNCTION SR 30	4,455	4,510	4,320
A00039	**0.00**	**2.54**	**2.54**	*	**JUNCTION SR 134**	**6,590**	**6,670**	**6,390**
	2.54	3.53	0.99		WEST URBANIZED BOUNDARY	6,590	6,670	6,390
	3.53	4.00	0.47		JUNCTION SR 126 VIA 12TH STREET	14,900	15,920	12,340
	4.00	4.44	0.44		JUNCTION FAI 15	25,380	27,120	21,020
	4.44	5.97	1.53		WEST INCORPORATED LIMITS OGDEN	23,235	24,830	19,240
	5.97	6.40	0.43		JUNCTION SR 204 WALL AVENUE OGDEN	25,125	26,850	20,810
	6.40	7.26	0.86		WASHINGTON BOULEVARD VIA 12TH STREET	16,800	17,950	13,910
	7.26	7.72	0.46		MONROE AVENUE OGDEN	13,270	14,180	10,990
	7.72	7.93	0.21		JUNCTION SR 203 HARRISON BOULEVARD VIA 12TH STREET	12,665	13,650	10,210
	7.93	8.73	0.80		MOUNTAIN ROAD IN OGDEN	8,020	8,640	6,470
	8.73	13.80	5.07		EAST INCORPORATED LIMITS OGDEN & VALLEY DRIVE	7,325	7,030	8,070
	13.80	16.58	2.78		JUNCTION SR 158 AT PINEVIEW	3,545	3,400	3,910
	16.58	19.35	2.77		JUNCTION SR 226	2,250	2,160	2,480
	19.35	21.45	2.10		JUNCTION LOCAL ROAD TO EDEN	2,040	2,060	1,980
	21.45	27.74	6.29		ROAD TO MONASTERY	1,255	1,270	1,220
	27.74	43.67	15.93		ROAD TO CAUSEY RESERVIOR	330	330	320
	43.67	52.35	8.68		WEBER - RICH COUNTY LINE	330	330	320
	52.35	67.35	15.00		WASATCH NATIONAL FOREST BOUNDARY	350	350	340
	67.35	67.64	0.29		WEST INCORPORATED LIMITS WOODRUFF - SR 16 IN WOODRUFF	405	410	390
A00040	**0.00**	**3.96**	**3.96**	*	**JUNCTION FAI 80 SILVER CREEK JUNCTION**	**16,225**	**16,030**	**16,710**
	3.96	6.04	2.08		JUNCTION SR 248	11,490	11,350	11,830
	6.04	13.21	7.17		SUMMIT- WASATCH COUNTY LINE	11,490	11,350	11,830
	13.21	16.38	3.17		JUNCTION SR 32 TO FRANCIS	9,310	9,200	9,590
	16.38	17.01	0.63		NORTH INCORPORATED LIMITS HEBER	17,195	16,990	17,710

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00040	17.01	17.94	0.93	JUNCTION SR 113 IN HEBER	17,195	16,990	17,710
	17.94	20.51	2.57	JUNCTION SR 189 AND SOUTH INCORPORATED LIMITS HEBER	6,870	6,790	7,080
	20.51	33.20	12.69	JUNCTION LOCAL ROAD	4,045	3,570	5,230
	33.20	40.28	7.08	DANIELS SUMMIT	4,045	3,570	5,230
	40.28	58.67	18.39	ROAD RIGHT TO CAMP STRAWBERRY	2,740	2,710	2,820
	58.67	68.25	9.58	WASATCH - DUCHESNE COUNTY LINE	3,040	3,000	3,130
	68.25	85.92	17.67	JUNCTION SR 208	3,155	3,120	3,250
	85.92	86.57	0.65	WEST INCORPORATED LIMITS DUCHESNE	2,735	2,700	2,820
	86.57	87.23	0.66	JUNCTION SR 87 IN DUCHESNE	3,330	3,290	3,430
	87.23	96.63	9.40	EAST INCORPORATED LIMITS DUCHESNE	2,800	2,770	2,880
	96.63	105.00	8.37	JUNCTION LOCAL ROAD TO BRIDGELAND	3,315	3,280	3,410
	105.00	105.46	0.46	SOUTHWEST INCORPORATED LIMITS MYTON	3,590	3,550	3,700
	105.46	109.59	4.13	NORTH INCORPORATED LIMITS MYTON	4,265	4,210	4,390
	109.59	111.39	1.80	JUNCTION SR 87 SOUTHWEST OF ROOSEVELT	6,850	6,770	7,060
	111.39	114.62	3.23	SOUTH INCORPORATED LIMITS ROOSEVELT	6,855	7,450	5,370
	114.62	115.24	0.62	JUNCTION SR 121 IN ROOSEVELT	8,165	8,870	6,400
	115.24	118.43	3.19	DUCHESNE - UINTAH COUNTY LINE & W. INC. LIMITS BALLARD	5,460	5,930	4,280
	118.43	121.44	3.01	EAST INCORPORATED LIMITS BALLARD	5,460	5,930	4,280
	121.44	130.48	9.04	JUNCTION LOCAL ROAD TO FORT DUCHESNE	2,875	3,120	2,250
	130.48	141.39	10.91	JUNCTION SR 88 ROAD TO OURAY	3,960	4,300	3,100
	141.39	141.47	0.08	SOUTH URBAN BOUNDARY VERNAL	3,960	4,300	3,100
	141.47	144.31	2.84	SOUTHWEST INCORPORATED LIMITS VERNAL	23,180	24,770	19,200
	144.31	145.89	1.58	JUNCTION SR 191 IN VERNAL	23,875	25,520	19,770
	145.89	145.98	0.09	SOUTHEAST URBAN BOUNDARY VERNAL	23,875	25,520	19,770
	145.98	148.28	2.30	EAST INC. LIMITS VERNAL & NORTH INC. LIMITS NAPLES	10,180	10,060	10,480
	148.28	148.52	0.24	JUNCTION SR 45	4,865	4,810	5,010
	148.52	157.18	8.66	SOUTH INCORPORATED LIMITS NAPLES	4,865	4,810	5,010
	157.18	168.79	11.61	JUNCTION SR 149 JENSEN	1,545	1,530	1,590
	168.79	174.78	5.99	JCT. CNTY RD. TO BONANZA JCT. - UTAH-COLORADO STATE LINE	1,460	1,440	1,500

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00041	**0.00**	**1.03**	**1.03**	*	**JUNCTION SR 28**	**3,405**	**3,450**	**3,300**
	1.03	1.90	0.87		SOUTH INCORPORATED LIMITS NEPHI	3,570	3,610	3,460
	1.90	3.22	1.32		JUNCTION SR 132 IN NEPHI	4,560	4,610	4,420
	3.22	4.79	1.57		NORTH INCORPORATED LIMITS NEPHI - FAI 15	3,490	3,530	3,390
A00042	**0.00**	**7.37**	**7.37**	*	**UTAH - IDAHO STATE LINE - JUNCTION SR 30 CURLEW JCT.**	**190**	**190**	**180**
A00043	**0.00**	**7.41**	**7.41**	*	**UTAH - WYOMING STATE LINE**	**710**	**680**	**780**
	7.41	7.92	0.51		WEST INCORPORATED LIMITS MANILA	1,130	1,080	1,250
	7.92	8.68	0.76		JUNCTION SR 44 IN MANILA	1,010	1,020	980
	8.68	10.54	1.86		EAST INCORPORATED LIMITS MANILA - WYOMING STATE LINE	930	940	900
A00044	**0.00**	**27.74**	**27.74**	*	**JUNCTION SR 191 GREENDALE JUNCTION**	**620**	**590**	**690**
	27.74	27.90	0.16		SOUTH INCORPORATED LIMITS MANILA - JUNCTION SR 43	740	710	820
A00045	**0.00**	**4.61**	**4.61**	*	**BEGINNING OF ROUTE**	**195**	**200**	**190**
	4.61	9.33	4.72		BONANZA	195	200	190
	9.33	14.80	5.47		JUNCTION (OLD SR45) COUNTY ROAD	195	200	190
	14.80	21.75	6.95		ROAD TO POWER PLANT	845	860	820
	21.75	24.06	2.31		ROAD TO RED WASH OIL FIELD	930	940	900
	24.06	38.45	14.39		JUNCTION LOCAL ROAD	1,170	1,180	1,130
	38.45	39.93	1.48		JUNCTION 4500 SOUTH	1,365	1,380	1,320
	39.93	40.15	0.22		SOUTH INCORPORATED LIMITS NAPLES - SR 40	1,365	1,380	1,320
A00046	**0.00**	**9.03**	**9.03**	*	**JUNCTION SR 191**	**1,060**	**1,070**	**1,030**
	9.03	21.77	12.74		LA SAL - UTAH - COLORADO STATE LINE	355	360	340
A00048	**0.00**	**1.77**	**1.77**	*	**NEAR COPPERTON**	**3,180**	**3,220**	**3,080**
	1.77	2.51	0.74		COPPERTON	3,180	3,220	3,080
	2.51	3.71	1.20		WEST INCORPORATED LIMITS WEST JORDAN	3,180	3,220	3,080
	3.71	6.60	2.89		JUNCTION SR 111	3,180	3,220	3,080
	6.60	7.18	0.58		WEST URBAN BOUNDARY	3,180	3,220	3,080
	7.18	8.21	1.03		JUNCTION 4800 WEST STREET	4,425	4,770	3,570
	8.21	8.50	0.29		JUNCTION 7800 SOUTH STREET	13,065	14,080	10,530
	8.50	8.80	0.30		WEST INCORPORATED LIMITS WEST JORDAN VIA 7800 SOUTH	13,065	14,080	10,530

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00048	8.80	9.30	0.50		JUNCTION BANGERTER HIGHWAY VIA 7800 SOUTH	16,910	18,220	13,630
	9.30	9.80	0.50		JUNCTION 3200 WEST STREET	20,690	22,290	16,680
	9.80	10.80	1.00		2700 WEST STREET	31,955	34,430	25,760
	10.80	11.73	0.93		REDWOOD ROAD SR 68 VIA 7800 SOUTH STREET	31,815	34,280	25,650
	11.73	12.17	0.44		EAST INC. LIMITS WEST JORDAN & WEST INC. LIMITS MIDVALE	31,380	33,810	25,300
	12.17	12.91	0.74		JUNCTION HOLDEN STREET IN MIDVALE	27,515	29,650	22,180
	12.91	13.24	0.33		7200 SOUTH VIA HOLDEN AND 700 WEST STREET	27,490	29,620	22,160
	13.24	13.93	0.69		JUNCTION FAI 15 VIA 7200 SOUTH STREET - STATE STREET	31,125	33,540	25,090
A00050	**0.00**	**0.84**	**0.84**	*	**JUNCTION SR 6**	**1,820**	**1,800**	**1,870**
	0.84	3.40	2.56		EAST INCORPORATED LIMITS DELTA	1,820	1,800	1,870
	3.40	8.24	4.84		JUNCTION SR 125 EAST OF DELTA	1,465	1,450	1,510
	8.24	18.12	9.88		JUNCTION LOCAL ROAD SOUTHEAST OF DELTA	815	810	840
	18.12	27.05	8.93		JUNCTION SR 100	650	640	670
	27.05	30.31	3.26		JUNCTION SR 64 NORTH OF HOLDEN - JUNCTION FAI 15	1,395	1,380	1,440
	30.32	30.58	0.26	*	JUNCTION FAI 15 WEST OF SCIPIO	1,485	1,500	1,440
	30.58	31.63	1.05		WEST INCORPORATED LIMITS SCIPIO	1,550	1,570	1,500
	31.63	31.78	0.15		CENTER OF SCIPIO	1,475	1,490	1,430
	31.78	49.68	17.91		SOUTHEAST INCORPORATED LIMITS SCIPIO	1,045	1,060	1,010
	49.68	55.38	5.70		MILLARD - SEVIER COUNTY LINE	1,045	1,060	1,010
	55.38	58.29	2.91		JUNCTION SR 260 TO AURORA	1,220	1,230	1,180
	58.29	58.39	0.10		WEST INCORPORATED LIMITS SALINA	2,310	2,340	2,240
	58.39	59.12	0.73		JUNCTION SR 24 - JUNCTION SR 89	4,055	4,100	3,930
A00051	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 147**	**2,700**	**2,910**	**2,180**
	0.23	0.38	0.15		NORTH INCORPORATED LIMITS SPANISH FORK	2,700	2,910	2,180
	0.38	1.29	0.91		MAGGIE'S BEND	7,345	7,910	5,920
	1.29	3.40	2.11		SOUTH INCORPORATED LIMITS SPRINGVILLE-SR 89	7,060	7,610	5,690
A00052	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 114**	**8,410**	**9,060**	**6,780**
	0.47	1.55	1.08		JUNCTION FAI 15 VIA 800 NORTH OREM	21,745	23,240	18,010
	1.55	1.76	0.21		JUNCTION 400 WEST STREET FAU 3033 OREM	21,285	22,750	17,630

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00052	1.76	2.57	0.81		JUNCTION SR 89 OREM	28,875	30,860	23,910
	2.57	3.07	0.50		400 EAST STREET VIA 800 NORTH	22,905	24,480	18,970
	3.07	4.54	1.47		800 EAST STREET OREM - OLMSTEAD JUNCTION	12,560	13,420	10,400
A00053	**0.00**	**0.34**	**0.34**	*	**JUNCTION FAI 15 24TH STREET INTERCHANGE**	**15,330**	**16,520**	**12,360**
	0.34	1.10	0.76		24TH STREET IN OGDEN	16,485	17,760	13,290
	1.10	1.49	0.39		EXCHANGE PLACE VIA 24TH STREET	17,630	19,000	14,210
	1.49	1.96	0.47		WALL AVENUE - WASHINGTON BOULEVARD	15,190	16,370	12,250
A00054	**0.00**	**0.41**	**0.41**	*	**MAIN STREET MONA**	**425**	**430**	**410**
	0.41	1.26	0.85		EAST INCORPORATED LIMITS MONA-JUNCTION FAI 15	475	480	460
A00055	**0.00**	**0.32**	**0.32**	*	**JUNCTION SR 6 PRICE BYPASS**	**11,425**	**12,210**	**9,460**
	0.32	0.95	0.63		600 WEST STREET IN PRICE	11,830	12,640	9,800
	0.95	1.26	0.31		JUNCTION SR 10 CARBON AVENUE VIA 100 NORTH	13,135	14,040	10,880
	1.26	1.35	0.09		JUNCTION SR 283 300 EAST STREET VIA 100 NORTH	13,185	14,090	10,920
	1.35	2.01	0.66		MAIN STREET VIA 300 EAST STREET	19,365	20,700	16,040
	2.01	2.09	0.08		1000 EAST VIA MAIN STREET	16,930	18,090	14,020
	2.09	2.52	0.43		JUNCTION LOCAL ROAD TO AIRPORT	12,315	13,160	10,200
	2.52	3.12	0.60		500 SOUTH - PRICE BYPASS SOUTH OF PRICE	10,230	10,930	8,470
A00056	**0.00**	**9.79**	**9.79**	*	**NEVADA - UTAH STATE LINE**	**430**	**440**	**420**
	9.79	25.04	15.25		MODENA	630	640	610
	25.04	31.44	6.40		SR 18 BERYL JUNCTION	1,180	1,130	1,300
	31.44	41.75	10.31		NEWCASTLE	1,180	1,130	1,300
	41.75	55.83	14.08		IRON MOUNTAIN	1,825	1,750	2,020
	55.83	58.61	2.78		JUNCTION LOCAL ROAD TO IRON SPRINGS	2,785	2,670	3,080
	58.61	58.81	0.20		JUNCTION LOCAL ROAD TO LUND WEST URBAN BOUNDARY	3,335	3,560	2,760
	58.81	60.38	1.57		WEST INCORPORATED LIMITS CEDAR CITY	3,335	3,560	2,760
	60.38	61.35	0.97		JUNCTION FAI 15 - SR 130 MAIN STREET CEDAR CITY	13,245	14,160	10,970
A00057	**0.00**	**2.66**	**2.66**	*	**JUNCTION SR 10**	**985**	**1,060**	**790**
	2.66	6.66	4.00		LOCAL ROAD TO ORANGEVILLE	900	970	730
	6.66	10.66	4.00		SR 29 - WILBERG MINE	900	970	730

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00058	**0.00**	**0.86**	**0.86**	*	**NEVADA - UTAH STATE LINE**	**11,310**	**11,450**	**10,970**
	0.86	1.26	0.40		EAST INCORPORATED LIMITS WENDOVER	7,700	7,790	7,470
	1.26	1.54	0.28		JUNCTION COUNTY ROAD - WENDOVER INTERCHANGE	5,590	5,660	5,420
A00059	**0.00**	**8.07**	**8.07**	*	**ARIZONA - UTAH STATE LINE**	**2,880**	**2,910**	**2,790**
	8.07	20.52	12.45		BIG PLAIN JUNCTION	2,905	2,940	2,820
	20.52	22.12	1.60		EAST INCORPORATED LIMITS HURRICANE - JUNCTION SR 9	3,270	3,310	3,170
A00060	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 26 RIVERDALE ROAD**	**11,630**	**11,350**	**12,330**
	0.77	2.25	1.48		JUNCTION SR 168	2,325	2,270	2,470
	2.25	6.91	4.66		E. INC. LIMITS RIVERDALE & WEBER-DAVIS CNTY LINE - JCT. SR 89	2,310	2,250	2,450
A00061	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 23**	**1,355**	**1,370**	**1,310**
	0.73	0.98	0.25		EAST INCORPORATED LIMITS CORNISH	1,890	1,910	1,830
	0.98	7.24	6.26		WEST INCORPORATED LIMITS LEWISTON - SR 91	1,890	1,910	1,830
A00062	**0.00**	**0.40**	**0.40**	*	**JUNCTION SR 89 IN JUNCTION**	**495**	**500**	**480**
	0.40	0.46	0.06		EAST INCORPORATED LIMITS JUNCTION	320	320	310
	0.46	4.49	4.03		WEST INCORPORATED LIMITS KINGSTON	320	320	310
	4.49	11.77	7.28		EAST INCORPORATED LIMITS KINGSTON	320	320	310
	11.77	18.05	6.28		JUNCTION SR 22 OTTER CREEK RESERVIOR	410	410	400
	18.05	31.47	13.42		ROAD TO ANGLE	410	410	400
	31.47	36.85	5.38		GREENWICH	410	410	400
	36.85	37.17	0.32		PIUTE - SEVIER COUNTY LINE	580	590	560
	37.17	37.93	0.76		SOUTH INCORPORATED LIMITS KOOSHAREM	695	700	670
	37.93	42.42	4.49		NORTH INC. LIMITS KOOSHAREM (AT MP 37.87) - JUNCTION SR 24	695	700	670
A00063	**0.00**	**2.65**	**2.65**	*	**NORTH BOUNDARY BRYCE CANYON - JUNCTION SR 12**	**2,465**	**2,490**	**2,390**
A00064	**0.00**	**0.96**	**0.96**	*	**JUNCTION FAI 15**	**740**	**750**	**720**
	0.96	1.91	0.95		SOUTH INCORPORATED LIMITS HOLDEN	690	700	670
	1.91	2.02	0.11		NORTH INCORPORATED LIMITS HOLDEN - JUNCTION SR 50	425	430	410
A00065	**0.00**	**2.38**	**2.38**	*	**JUNCTION FAI 80 MOUNTAIN DELL RESERVIOR**	**1,085**	**1,100**	**1,050**
	2.38	7.78	5.40		JUNCTION LOCAL ROAD TO EMIGRATION CANYON	625	630	610
	7.78	19.32	11.54		SALT LAKE - MORGAN COUNTY LINE	575	580	560

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00065	19.32	21.68	2.36		JUNCTION SR 66 EAST CANYON RESEVOIR	280	280	270
	21.68	26.99	5.31		MORGAN - SUMMIT COUNTY LINE	270	270	260
	26.99	27.25	0.26		WEST INCORPORATED LIMITS OF HENEFER	705	710	680
	27.25	28.13	0.88		JUNCTION SR 86 IN HENEFER - FAI 84	1,240	1,250	1,200
A00066	**0.00**	**8.75**	**8.75**	*	**JUNCTION SR 65 AT EAST CANYON**	**475**	**480**	**460**
	8.75	12.11	3.36		PORTERSVILLE	1,110	1,120	1,080
	12.11	12.69	0.58		SOUTH INCORPORATED LIMITS MORGAN	2,010	2,030	1,950
	12.69	13.46	0.77		YOUNG STREET (CITY CENTER)	5,875	5,950	5,700
	13.46	13.51	0.05		COMMERCIAL STREET	5,650	5,720	5,480
	13.51	13.66	0.15		SR 84 EASTBOUND OFF RAMP	880	890	850
	13.66	14.20	0.54		600 EAST SR 66 TURNS RIGHT	880	890	850
	14.20	14.28	0.08		SR 66 TURNS RIGHT AND FAI 84 WESTBOUND OFF RAMP	880	890	850
	14.28	14.84	0.56		SR 66 TURNS RIGHT FAI 84 EASTBOUND ON RAMP - SR 66	510	520	490
A00068	**0.00**	**23.73**	**23.73**	*	**JUNCTION SR 6 ELBERTA**	**425**	**430**	**410**
	23.73	32.85	9.12		PELICAN POINT	920	930	890
	32.85	36.17	3.32		JUNCTION SR 73 WEST OF LEHI	2,610	2,640	2,530
	36.17	40.21	4.04		SALT LAKE COUNTY LINE & URBAN BOUNDARY	3,960	3,760	4,470
	40.21	40.97	0.76		JUNCTION SR 140 BLUFFDALE	5,970	6,430	4,810
	40.97	42.48	1.51		RIVERTON SOUTH INCORPORATED LIMITS VIA REDWOOD ROAD	11,525	12,420	9,290
	42.48	43.76	1.28		JUNCTION SR 71 12600 SOUTH IN RIVERTON	16,545	17,830	13,340
	43.76	46.50	2.74		NORTH INC. LIMITS RIVERTON & S. INC. LIMITS SOUTH JORDAN	17,610	18,970	14,200
	46.50	47.00	0.50		N. INC. LIMITS SOUTH JORDAN & S. INC. LIMITS WEST JORDAN	18,030	19,430	14,540
	47.00	48.52	1.52		JUNCTION SR 209 9000 SOUTH STREET	34,575	37,250	27,880
	48.52	50.29	1.77		JUNCTION SR 48 7800 SOUTH STREET	31,115	33,530	25,090
	50.29	50.96	0.67		NORTH INCORPORATED LIMITS WEST JORDAN	36,305	39,120	29,270
	50.96	51.53	0.57		JUNCTION FAI 215	55,695	60,010	44,900
	51.53	52.54	1.01		JUNCTION SR 173 5400 SOUTH STREET	55,240	59,520	44,540
	52.54	53.52	0.98		4700 SOUTH STREET SR 266	39,910	43,000	32,180
	53.52	53.53	0.01		SOUTH INCORPORATED LIMITS WEST VALLEY CITY	39,910	43,000	32,180

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00068	53.53	54.53	1.00	4100 SOUTH VIA SR 68	36,540	39,370	29,460
	54.53	56.42	1.89	3500 SOUTH SR 171	37,890	40,830	30,550
	56.42	56.54	0.12	JCT. SR 201 (N. INC. LIMITS WEST VALLEY CITY S. INC. LIMITS S.L.C.)	37,890	40,830	30,550
	56.54	57.55	1.01	2100 SOUTH STREET VIA REDWOOD ROAD	22,400	25,430	14,820
	57.55	59.30	1.75	CALIFORNIA AVENUE(1330 SOUTH)	22,155	25,150	14,660
	59.30	59.67	0.37	FAI 80 INTERCHANGE	24,080	27,340	15,930
	59.67	60.45	0.78	NORTH TEMPLE STREET	16,775	18,080	13,520
	60.45	61.01	0.56	600 NORTH STREET	18,955	20,420	15,280
	61.01	62.78	1.77	1000 NORTH STREET	11,160	12,030	9,000
	62.78	63.08	0.30	2400 NORTH STREET	6,865	7,400	5,530
	63.08	63.85	0.77	SALT LAKE - DAVIS COUNTY LINE & N. INC. LIMITS S.L.C.	6,865	7,400	5,530
	63.85	63.98	0.13	SOUTH INCORPORATED LIMITS NORTH SALT LAKE	6,865	7,400	5,530
	63.98	64.57	0.59	JUNCTION FAI 215	5,950	6,410	4,800
	64.57	65.94	1.37	CENTER STREET	5,950	6,410	4,800
	65.94	67.51	1.57	N. INC. LIMITS NORTH SALT LAKE & S. INC. LIMITS WOODS CROSS	5,045	5,440	4,070
	67.51	68.30	0.79	NORTH INCORPORATED LIMITS WOODS CROSS	5,045	5,440	4,070
	68.30	68.89	0.59	WEST INCORPORATED LIMITS WEST BOUNTIFUL	8,175	8,810	6,590
	68.89	69.18	0.29	JUNCTION 800 WEST VIA 500 SOUTH	12,670	13,650	10,210
	69.18	69.40	0.22	JUNCTION FAI 15 VIA 500 SOUTH	14,840	15,990	11,960
	69.40	69.74	0.34	JUNCTION SR 89 & W. INC. LIMITS BOUNTIFUL - JUNCTION SR 106	27,100	29,200	21,850
A00070	**0.00**	**1.37**	**1.37**	* **JUNCTION FAI 15**	**3,132**	**3,010**	**3,440**
	1.37	6.90	5.53	COVE FORT INTERCHANGE	3,355	3,220	3,690
	6.90	7.88	0.98	MILLARD - SEVIER COUNTY LINE	3,355	3,220	3,690
	7.88	17.24	9.36	CLEAR CREEK INTERCHANGE	3,355	3,220	3,690
	17.24	23.31	6.07	BELKNAP INTERCHANGE	3,770	3,620	4,140
	23.31	25.88	2.57	SEVIER JUNCTION INTERCHANGE	5,040	4,840	5,540
	25.88	31.83	5.95	JOSEPH INTERCHANGE	5,305	5,100	5,830
	31.83	37.29	5.46	ELSINORE INTERCHANGE	5,630	5,410	6,180
	37.29	40.42	3.13	SOUTH RICHFIELD INTERCHANGE	3,610	3,540	3,790

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00070	40.42	49.11	8.69	NORTH RICHFIELD INTERCHANGE	6,640	6,510	6,970
	49.11	56.92	7.81	SIGURD INTERCHANGE	7,195	7,050	7,560
	56.92	57.17	0.25	SALINA INTERCHANGE	6,520	6,260	7,160
	57.17	63.41	6.24	EAST INCORPORATED LIMITS SALINA	6,520	6,260	7,160
	63.41	74.16	10.75	GOOSEBERRY INTERCHANGE	6,380	6,130	7,010
	74.16	85.47	11.31	RANCH EXIT #72 TO CONVULSION MINE	4,300	4,130	4,720
	85.47	91.24	5.77	JUNCTION IVY CREEK INTERCHANGE #85	3,825	3,670	4,200
	91.24	94.43	3.19	JUNCTION SR 10 INTERCHANGE	3,170	3,050	3,480
	94.43	99.70	5.27	SEVIER - EMERY COUNTY LINE	3,170	3,050	3,480
	99.70	108.24	8.54	MUDDY CREEK INTERCHANGE	3,170	3,050	3,480
	108.24	116.75	8.51	SOUTH WASH INTERCHANGE	3,170	3,050	3,480
	116.75	131.79	15.04	MOORE INTERCHANGE	3,130	3,010	3,440
	131.79	149.52	17.73	SINBAD INTERCHANGE	3,130	3,010	3,440
	149.52	158.28	8.76	BUCKMASTER DRAW INTERCHANGE	3,470	3,290	3,920
	158.28	163.35	5.07	JUNCTION SR 6 WEST OF GREEN RIVER INTERCHANGE	5,590	5,300	6,310
	163.35	164.05	0.70	EMERY - GRAND COUNTY LINE	5,590	5,300	6,310
	164.05	164.91	0.86	WEST GREEN RIVER INTERCHANGE	3,495	3,320	3,940
	164.91	175.96	11.05	ELGIN EAST GREEN RIVER INTERCHANGE	5,370	5,090	6,060
	175.96	182.56	6.60	FLOY INTERCHANGE	5,370	5,090	6,060
	182.56	187.82	5.26	CRESCENT JUNCTION	5,575	5,360	6,120
	187.82	193.89	6.07	THOMPSON INTERCHANGE	5,375	5,160	5,900
	193.89	205.18	11.29	YELLOW CAT INTERCHANGE	5,445	5,230	5,980
	205.18	214.84	9.66	WHITEHOUSE INTERCHANGE	5,385	5,170	5,910
	214.84	222.35	7.51	NORTH CISCO INTERCHANGE	5,210	5,000	5,720
	222.35	227.56	5.21	WESTWATER INTERCHANGE	5,210	5,000	5,720
	227.56	232.15	4.59	HARLEY DOME INTERCHANGE - UTAH - COLORADO STATE LINE	5,230	5,020	5,740
A00071	**0.00**	**0.90**	**0.90**	* **JUNCTION SR 68**	**18,545**	**20,970**	**12,490**
	0.90	2.51	1.61	EAST INC. LIMITS RIVERTON & WEST INC. LIMITS DRAPER	18,545	20,970	12,490
	2.51	2.59	0.08	FRONTAGE ROAD	21,550	24,370	14,510

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00071	2.59	3.63	1.04		JUNCTION FAI 15 VIA 12300 SOUTH STREET	19,850	22,440	13,360
	3.63	4.82	1.19		700 EAST STREET IN DRAPER	10,310	11,660	6,940
	4.82	5.81	0.99		NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	13,960	15,780	9,400
	5.81	6.81	1.00		10600 SOUTH STREET	19,650	22,220	13,230
	6.81	7.32	0.51		9800 SOUTH STREET VIA 700 EAST	29,420	33,270	19,810
	7.32	7.83	0.51		9400 SOUTH STREET	30,225	34,180	20,350
	7.83	8.31	0.48		9000 SOUTH STREET SR 209 VIA 700 EAST	31,280	35,370	21,060
	8.31	9.31	1.00		8600 SOUTH STREET	38,055	43,030	25,620
	9.31	10.29	0.98		7800 SOUTH STREET NORTH INCORPORATED LIMITS SANDY	32,325	36,550	21,760
	10.29	10.93	0.64		FORT UNION BOULEVARD	28,565	32,300	19,230
	10.93	11.65	0.72		6600 SOUTH STREET VIA 900 EAST	28,565	32,300	19,230
	11.65	12.17	0.52		5900 SOUTH STREET	25,345	28,660	17,060
	12.17	13.29	1.12		5600 SOUTH STREET VIA 900 EAST	29,880	33,790	20,120
	13.29	14.09	0.80		4800 SOUTH STREET SR 152 VIA 900 EAST	32,150	36,350	21,640
	14.09	14.97	0.88		4500 SOUTH STREET SR 266 VIA 700 EAST	40,990	46,090	28,250
	14.97	15.85	0.88		3900 SOUTH STREET	47,030	52,880	32,420
	15.85	16.72	0.87		3300 SOUTH STREET SR 171 S. INC. LIMITS SOUTH SALT LAKE CITY	46,340	52,100	31,940
	16.72	17.15	0.43		2700 SOUTH STREET VIA 700 EAST STREET	40,805	45,880	28,120
	17.15	17.60	0.45		JUNCTION FAI 80	44,380	49,900	30,590
	17.60	18.15	0.55		2100 SOUTH	49,015	55,110	33,780
	18.15	18.71	0.56		1700 SOUTH STREET VIA 700 EAST	48,645	54,690	33,530
	18.71	19.27	0.56		1300 SOUTH STREET	42,270	47,520	29,130
	19.27	19.42	0.15		900 SOUTH STREET VIA 700 EAST STREET	42,270	47,520	29,130
	19.42	20.01	0.59		800 SOUTH STREET - 400 SOUTH STREET	42,270	47,520	29,130
A00072	**0.00**	**0.35**	**0.35**	*	**JUNCTION SR 24**	**670**	**680**	**650**
	0.35	4.44	4.09		EAST INCORPORATED LIMITS LOA	445	450	430
	4.44	10.95	6.51		FREMONT	200	200	190
	10.95	35.35	24.40		WAYNE - SEVIER COUNTY LINE - FAI 70 FREMONT JUNCTION	200	200	190
A00073	**0.00**	**3.42**	**3.42**	*	**JUNCTION SR 36**	**1,215**	**1,160**	**1,340**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00073	3.42	15.75	12.33		ROAD TO TEST CENTER	690	660	760
	15.75	20.57	4.82		TOOELE - UTAH COUNTY LINE	690	660	760
	20.57	24.77	4.20		FAIRFIELD	965	920	1,070
	24.77	25.72	0.95		SOUTH INCORPORATED LIMITS CEDAR FORT	1,025	980	1,130
	25.72	36.28	10.56		NORTH INCORPORATED LIMITS CEDAR FORT	1,880	1,800	2,080
	36.28	38.38	2.10		JUNCTION SR 68	4,000	3,830	4,420
	38.38	38.95	0.57		WEST URBAN BOUNDARY	5,525	5,900	4,580
	38.95	40.67	1.72		WEST INCORPORATED LIMITS LEHI	8,130	8,690	6,730
	40.67	41.02	0.35		FAI 15 EAST OF LEHI - JUNCTION SR 89	6,050	6,470	5,010
A00074	**0.00**	**0.42**	**0.42**	*	**JUNCTION SR 89 MAIN STREET AMERICAN FORK**	**17,530**	**18,890**	**14,130**
	0.42	1.02	0.60		300 NORTH IN AMERICAN FORK	16,400	17,670	13,220
	1.02	1.75	0.73		700 NORTH VIA 100 EAST AMERICAN FORK	15,910	17,140	12,830
	1.75	2.09	0.34		NORTH INCORPORATED LIMITS AMERICAN FORK	11,320	12,200	9,130
	2.09	3.89	1.80		SOUTH INCORPORATED LIMITS HIGHLAND	11,320	12,200	9,130
	3.89	4.39	0.50		11000 NORTH SR 92	8,995	8,780	9,540
	4.39	5.67	1.28		N. INC. LIMITS HIGHLAND & S. INC. LIMITS ALPINE - 200 NORTH	8,715	8,820	8,450
A00075	**0.00**	**2.04**	**2.04**	*	**FAI 15 IRONTON INTERCHANGE - JUNCTION SR 89**	**13,220**	**14,240**	**10,660**
A00076	**0.00**	**2.57**	**2.57**	*	**IVY CREEK INTERCHANGE - SR 72 (FAI 70 FRONTAGE ROAD)**	**95**	**100**	**80**
A00077	**0.00**	**4.47**	**4.47**	*	**JUNCTION SR 147 SOUTH OF LAKESHORE**	**935**	**950**	**910**
	4.47	6.95	2.48		1750 WEST	1,015	1,030	980
	6.95	7.17	0.22		WEST INCORPORATED LIMITS SPRINGVILLE	910	890	970
	7.17	7.54	0.37		JUNCTION FAI 15 VIA 400 SOUTH	12,135	13,080	9,780
	7.54	8.60	1.06		EAST INCORPORATED LIMITS SPRINGVILLE	12,135	13,080	9,780
	8.60	9.06	0.46		WEST URBAN BOUNDARY SPRINGVILLE - SR 89	12,495	13,460	10,070
A00078	**0.00**	**8.90**	**8.90**	*	**JUNCTION FAI 15**	**2,400**	**2,430**	**2,330**
	8.90	9.22	0.32		WEST INCORPORATED LIMITS LEVAN - SR 28	2,030	2,050	1,970
A00079	**0.00**	**1.11**	**1.11**	*	**JUNCTION SR 126**	**12,145**	**13,090**	**9,790**
	1.11	1.74	0.63		WEST INCORPORATED LIMITS OGDEN	14,070	15,160	11,340
	1.74	2.32	0.58		FAI 15 31ST STREET INTCHANGE	25,040	26,760	20,740

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00079	2.32	2.56	0.24		BEGINNING OF ONE WAY COUPLET EASTBOUND	11,690	12,490	9,680
	2.56	2.99	0.43		WALL AVE. - WASHINGTON BLVD. VIA 31ST STREET EASTBOUND	13,005	13,900	10,770
	2.99	3.41	0.42	*	WASHINGTON BOULEVARD VIA 30TH STREET TWO WAY	15,425	16,480	12,780
	3.41	4.13	0.72		MADISON AVENUE FAU 2027 - SR 203 VIA 30TH STREET	14,770	15,780	12,230
	4.13	4.56	0.43	*	WASHINGTON BOULEVARD VIA 30TH STREET WESTBOUND	15,845	16,930	13,120
	4.56	4.89	0.33		WALL AVENUE - 31ST STREET WESTBOUND	13,035	13,930	10,800
A00080	**0.00**	**1.48**	**1.48**	*	**NEVADA - UTAH STATE LINE**	**5,045**	**4,620**	**6,100**
	1.48	2.43	0.95		WENDOVER INTERCHANGE	7,265	6,660	8,780
	2.43	3.98	1.55		EAST INCORPORATED LIMITS WENDOVER	7,265	6,660	8,780
	3.98	41.30	37.32		BONNEVILLE SPEEDWAY INTERCHANGE	7,255	6,650	8,770
	41.30	56.21	14.91		KNOLLS INTERCHANGE	7,395	6,780	8,940
	56.21	61.85	5.64		ARAGONITE INTERCHANGE	7,740	7,090	9,360
	61.85	69.54	7.69		LAKESIDE INTERCHANGE	7,765	7,120	9,390
	69.54	76.46	6.92		DELLE INTERCHANGE	7,790	7,140	9,420
	76.46	83.45	6.99		ROWLEY INTERCHANGE	8,600	7,880	10,400
	83.45	88.51	5.06		STANSBURY INTERCHANGE	8,760	8,030	10,590
	88.51	98.77	10.26		BURMESTER INTERCHANGE	8,900	8,160	10,760
	98.77	101.41	2.64		TOOELE INTERCHANGE	25,335	24,340	27,830
	101.41	101.61	0.20		LAKEPOINT JUNCTION INTERCHANGE	15,270	14,670	16,770
	101.61	104.44	2.83		TOOELE- SALT LAKE COUNTY LINE	15,270	14,670	16,770
	104.44	109.49	5.05		GARFIELD CONNECTION	16,350	15,710	17,960
	109.49	111.47	1.98		SOUTH INCORPORATED LIMITS SALT LAKE CITY	16,350	15,710	17,960
	111.47	113.47	2.00		7200 WEST INTERCHANGE SALT LAKE URBAN BOUNDARY	17,770	17,070	19,520
	113.47	114.53	1.06		5600 WEST INTERCHANGE	26,180	25,150	28,760
	114.53	115.55	1.02		4800 WEST INTERCHANGE / WRIGHT BROTHERS EXIT	42,495	40,820	46,680
	115.55	117.48	1.93		4000 WEST INTERCHANGE (BANGERTER HIGHWAY)	36,540	35,100	40,140
	117.48	118.08	0.60		FAI 215 INTERCHANGE	30,515	33,110	24,030
	118.08	120.04	1.96		REDWOOD ROAD - JUNCTION FAI 15 IN SALT LAKE CITY	53,625	61,080	34,990
	120.05	121.11	1.07	*	JUNCTION FAI 15 WEST INC. LIMITS SOUTH SALT LAKE	106,350	116,830	80,140

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00080	121.11	121.71	0.60	STATE STREET INTERCHANGE	101,525	111,530	76,510
	121.71	122.01	0.30	E. INC. LIMITS S. SALT LAKE & W. INC. LIMITS SALT LAKE CITY	101,525	111,530	76,510
	122.01	122.94	0.93	700 EAST INTERCHANGE	95,535	103,650	75,240
	122.94	124.68	1.74	1300 EAST INTERCHANGE	76,485	82,980	60,240
	124.68	124.81	0.13	2300 EAST INTERCHANGE	52,550	57,020	41,390
	124.81	125.17	0.36	SR 215 OFF RAMP	27,597	29,940	21,730
	125.17	125.66	0.49	EAST INCORPORATED LIMITS SALT LAKE CITY	27,597	29,940	21,730
	125.66	126.59	0.93	FOOTHILL DRIVE OFF RAMP	25,167	27,310	19,820
	126.59	126.87	0.28	FAI 215 ON RAMP	38,420	38,210	38,940
	126.87	127.78	0.91	EAST URBAN BOUNDARY SALT LAKE CITY	38,420	38,210	38,940
	127.78	129.76	1.98	QUARRY INTERCHANGE CEMENT PLANT	38,320	38,110	38,840
	129.76	131.59	1.83	MOUNT AIRE INTERCHANGE	38,235	38,030	38,750
	131.59	134.05	2.46	MOUNT DELLE INTERCHANGE SR 65	36,985	36,780	37,490
	134.05	136.91	2.86	LAMBS CANYON INTERCHANGE	37,050	36,850	37,550
	136.91	137.36	0.45	SALT LAKE - SUMMIT COUNTY LINE	37,050	36,850	37,550
	137.36	139.78	2.42	SUMMIT PARK INTERCHANGE	35,895	35,700	36,380
	139.78	142.15	2.37	JEREMY RANCH INTERCHANGE	33,600	33,420	34,050
	142.15	144.85	2.70	KIMBALL JUNCTION INTERCHANGE SR 224	24,365	24,230	24,690
	144.85	148.73	3.88	SILVER CREEK JUNCTION INTERCHANGE	12,595	12,530	12,770
	148.73	153.03	4.30	RANCH INTERCHANGE	12,540	12,470	12,710
	153.03	159.77	6.74	WANSHIP INTERCHANGE	10,470	10,140	11,290
	159.77	160.70	0.93	WEST INCORPORATED LIMITS COALVILLE	10,470	10,140	11,290
	160.70	160.96	0.26	COALVILLE INTERCHANGE	10,450	10,120	11,270
	160.96	165.47	4.51	EAST INCORPORATED LIMITS COALVILLE	10,450	10,120	11,270
	165.47	165.94	0.47	JUNCTION FAI 84	12,772	12,370	13,770
	165.94	176.91	10.97	ECHO INTERCHANGE JUNCTION FAS 188	10,790	10,210	12,250
	176.91	182.36	5.45	EMORY INTERCHANGE	10,810	10,230	12,270
	182.36	186.04	3.68	CASTLEROCK INTERCHANGE	10,755	10,170	12,210
	186.04	189.97	3.93	BALL & MOORE INTERCHANGE	10,785	10,200	12,240

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00080	189.97	194.99	5.02		WAHSATCH INTERCHANGE - UTAH - WYOMING STATE LINE	10,825	10,240	12,290
A00081	**0.00**	**1.72**	**1.72**	*	**JUNCTION SR 30**	**1,365**	**1,380**	**1,320**
	1.72	2.47	0.75		SOUTH INC. LIMITS FIELDING - JUNCTION LOCAL ROAD	1,350	1,370	1,310
A00082	**0.00**	**0.74**	**0.74**	*	**JUNCTION SR 102**	**10,280**	**10,400**	**9,970**
	0.74	0.99	0.25		NORTH INC. LIMITS TREMONTON & S. INC. LIMITS GARLAND	8,380	8,480	8,130
	0.99	2.01	1.02		1000 NORTH IN GARLAND	8,355	8,460	8,100
	2.01	2.63	0.62		FACTORY STREET IN GARLAND	5,105	5,170	4,950
	2.63	3.27	0.64		EAST INCORPORATED LIMITS GARLAND - JUNCTION SR 13	2,030	2,050	1,970
A00083	**0.00**	**1.54**	**1.54**	*	**JUNCTION SR 13**	**4,490**	**4,300**	**4,960**
	1.54	3.58	2.04		WEST INCORPORATED LIMITS CORINNE	4,155	3,980	4,590
	3.58	13.99	10.41		JUNCTION LOCAL ROAD	4,155	3,980	4,590
	13.99	17.44	3.45		JUNCTION SR 102	3,820	3,660	4,220
	17.44	24.58	7.14		JUNCTION ROAD TO GOLDEN SPIKE (LAMPO JUNCTION)	1,095	1,050	1,210
	24.58	31.60	7.02		SOUTH INCORPORATED LIMITS HOWELL - JUNCTION FAI 84	340	330	380
A00084	**0.00**	**4.67**	**4.67**	*	**UTAH - IDAHO STATE LINE**	**5,400**	**5,190**	**5,930**
	4.67	7.15	2.48		WEST SNOWVILLE INTERCHANGE	6,015	5,780	6,610
	7.15	12.03	4.88		SNOWVILLE INTERCHANGE	7,395	7,100	8,120
	12.03	15.87	3.84		RANCH EXIT	7,460	7,170	8,190
	15.87	17.45	1.58		HANSEL VALLEY INTERCHANGE	7,620	7,320	8,370
	17.45	20.41	2.96		EAST RATTLESNAKE INTERCHANGE	7,695	7,390	8,450
	20.41	24.56	4.15		BLUE CREEK INTERCHANGE	7,815	7,510	8,580
	24.56	25.86	1.30		POCATELLO VALLEY INTERCHANGE	8,170	7,850	8,970
	25.86	26.70	0.84		NORTH INCORPORATED LIMITS HOWELL	8,170	7,850	8,970
	26.70	27.48	0.78		HOWELL INTERCHANGE	8,195	7,870	9,000
	27.48	32.58	5.10		EAST INCORPORATED LIMITS HOWELL	8,195	7,870	9,000
	32.58	39.73	7.15		WHITES VALLEY INTERCHANGE	8,195	7,870	9,000
	39.73	41.06	1.33		BOTHWELL INTERCHANGE	7,810	7,500	8,580
	41.06	43.20	2.14		WEST TREMONTON INTERCHANGE-FAI 15	7,090	6,810	7,790
	43.21	44.49	1.29	*	JUNCTION FAI 15 IN OGDEN	7,190	7,800	5,660

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00084	44.49	46.23	1.74		RIVERDALE ROAD INTERCHANGE	10,245	11,120	8,070
	46.23	46.64	0.41		SOUTH INCORPORATED LIMITS RIVERDALE	10,245	11,120	8,070
	46.64	47.36	0.72		WEBER - DAVIS COUNTY LINE	10,245	11,120	8,070
	47.36	50.60	3.24		SOUTH WEBER INTERCHANGE	7,940	8,610	6,250
	50.60	53.84	3.24		UINTAH JCT. INTERCHANGE & DAVIS - WEBER COUNTY LINE	10,650	11,560	8,390
	53.84	55.19	1.35		WEBER - MORGAN COUNTY LINE	10,650	11,560	8,390
	55.19	59.37	4.18		MOUNTAIN GREEN INTERCHANGE	8,985	8,930	9,110
	59.37	65.33	5.96		PETERSON STATION INTERCHANGE FAS 591	9,365	9,310	9,500
	65.33	66.21	0.88		WEST INCORPORATED LIMITS MORGAN	9,365	9,310	9,500
	66.21	66.78	0.57		WEST MORGAN INTERCHANGE	6,735	6,700	6,830
	66.78	66.96	0.18		EAST MORGAN INTERCHANGE	8,050	8,010	8,160
	66.96	69.05	2.09		EAST INCORPORATED LIMITS MORGAN	8,050	8,010	8,160
	69.05	71.16	2.11		ROUND VALLEY INTERCHANGE	8,005	7,960	8,120
	71.16	74.21	3.05		TAGGERT INTERCHANGE	7,870	7,830	7,980
	74.21	75.12	0.91		DEVILS SLIDE INTERCHANGE	7,265	7,220	7,370
	75.12	75.64	0.52		MORGAN - SUMMIT COUNTY LINE	7,265	7,220	7,370
	75.64	77.41	1.77		WEST HENEFER INTERCHANGE	6,725	6,690	6,820
	77.41	78.02	0.61		WEST INCORPORATED LIMITS HENEFER	6,725	6,690	6,820
	78.02	78.58	0.56		EAST HENEFER INTERCHANGE JUNCTION SR 65	5,810	5,780	5,890
	78.58	82.73	4.15		EAST INCORPORATED LIMITS HENEFER - FAI 80 ECHO JUNCTION	5,810	5,780	5,890
A00086	**0.00**	**1.88**	**1.88**	*	**JUNCTION FAI 84**	**490**	**500**	**480**
	1.88	2.11	0.23		NORTH INCORPORATED LIMITS HENEFER - JUNCTION SR 65	560	570	540
A00087	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 40**	**1,230**	**1,240**	**1,190**
	0.64	5.93	5.29		NORTH INCORPORATED LIMITS DUCHESNE	1,210	1,220	1,170
	5.93	15.59	9.66		JUNCTION SR 35	1,210	1,220	1,170
	15.59	18.58	2.99		LOCAL ROAD TO MOUNTAIN HOME	1,355	1,370	1,310
	18.58	20.88	2.30		JUNCTION LOCAL ROAD TO BONETA	1,935	1,960	1,880
	20.88	21.22	0.34		WEST INCORPORATED LIMITS ALTAMONT	1,020	1,030	990
	21.22	21.37	0.15		CENTER STREET ALTAMONT	1,020	1,030	990

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00087	21.37	28.42	7.05		EAST INCORPORATED LIMITS ALTAMONT	1,020	1,030	990
	28.42	37.99	9.57		UPALCO - SR 40 SOUTHWEST OF ROOSEVELT	1,080	1,090	1,050
A00088	**0.00**	**9.96**	**9.96**	*	**OURAY**	**680**	**690**	**660**
	9.96	16.96	7.00		JUNCTION LOCAL ROAD - SR 40 SOUTH OF VERNAL	885	900	860
A00089	**0.00**	**5.03**	**5.03**	*	**ARIZONA - UTAH STATE LINE**	**1,615**	**1,570**	**1,730**
	5.03	8.87	3.84		EAST INCORPORATED LIMITS BIG WATER	1,775	1,720	1,910
	8.87	54.93	46.06		WEST INCORPORATED LIMITS BIG WATER	1,775	1,720	1,910
	54.93	61.59	6.66		JUNCTION LOCAL ROAD EAST OF KANAB	2,105	2,040	2,260
	61.59	64.18	2.59		EAST INCORPORATED LIMITS KANAB	4,375	4,320	4,510
	64.18	65.40	1.22		JUNCTION SR 11	6,150	6,080	6,330
	65.40	81.62	16.22		NORTH INCORPORATED LIMITS KANAB	2,665	2,630	2,740
	81.62	85.25	3.63		JUNCTION SR 9 MOUNT CARMEL JUNCTION	1,890	1,870	1,950
	85.25	86.99	1.74		WEST INCORPORATED LIMITS ORDERVILLE	2,310	2,280	2,380
	86.99	89.71	2.72		NORTHEAST INCORPORATED LIMITS ORDERVILLE	2,180	2,150	2,250
	89.71	90.51	0.80		SOUTH INCORPORATED LIMITS GLENDALE	2,195	2,170	2,260
	90.51	104.20	13.69		NORTH INCORPORATED LIMITS GLENDALE	1,395	1,380	1,440
	104.20	108.32	4.12		JUNCTION SR 14 LONG VALLEY JUNCTION	1,395	1,380	1,440
	108.32	116.36	8.04		KANE - GARFIELD COUNTY LINE	1,415	1,400	1,460
	116.36	117.01	0.65		SOUTH INCORPORATED LIMITS HATCH	2,230	2,200	2,300
	117.01	124.85	7.84		NORTH INCORPORATED LIMITS HATCH	2,170	2,140	2,240
	124.85	131.17	6.32		JUNCTION SR 12 BRYCE CANYON JUNCTION	2,665	2,630	2,740
	131.17	131.74	0.57		EAST INCORPORATED LIMITS PANGUITCH	5,315	5,250	5,470
	131.74	132.63	0.89		CENTER OF PANGUITCH	6,635	6,560	6,830
	132.63	141.81	9.18		NORTH INCORPORATED LIMITS PANGUITCH	2,215	2,190	2,280
	141.81	156.98	15.17		JUNCTION SR 20 IN ORTON	1,195	1,180	1,230
	156.98	160.81	3.83		GARFIELD - PIUTE COUNTY LINE & S. INC. LIMITS CIRCLEVILLE	1,195	1,180	1,230
	160.81	163.17	2.36		EAST INCORPORATED LIMITS CIRCLEVILLE	1,740	1,730	1,770
	163.17	165.81	2.64		SOUTH INCORPORATED LIMITS JUNCTION	1,740	1,730	1,770
	165.81	167.85	2.04		JUNCTION SR 153 (IN JUNCTION)	1,740	1,730	1,770

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	167.85	179.07	11.22		NORTH INCORPORATED LIMITS JUNCTION	1,105	1,100	1,130
	179.07	181.38	2.31		SOUTH INCORPORATED LIMITS MARYSVALE	1,620	1,600	1,670
	181.38	185.58	4.20		NORTH INCORPORATED LIMITS MARYSVALE	1,420	1,400	1,460
	185.58	193.31	7.73		PIUTE - SEVIER CNTY LINE - JUNCTION FAI 70 SEVIER JUNCTION	1,420	1,400	1,460
	193.32	194.78	1.47	*	JUNCTION FAI 70 SOUTH INCORPORATED LIMITS SALINA	4,650	4,960	3,880
	194.78	195.08	0.30		300 SOUTH IN SALINA	5,195	5,540	4,340
	195.08	195.74	0.66		JUNCTION SR 50 IN SALINA	7,145	7,620	5,970
	195.74	200.67	4.93		NORTH INCORPORATED LIMITS SALINA	6,795	7,240	5,670
	200.67	206.49	5.82		SANPETE - SEVIER COUNTY LINE	6,195	6,600	5,170
	206.49	207.86	1.37		SOUTH INCORPORATED LIMITS CENTERFIELD	6,450	6,880	5,380
	207.86	209.50	1.64		NORTH INC. LIMITS CENTERFIELD & S. INC. LIMITS GUNNISON	8,855	9,440	7,390
	209.50	211.09	1.59		JUNCTION SR 28 IN GUNNISON	2,830	2,710	3,130
	211.09	215.90	4.81		EAST INCORPORATED LIMITS GUNNISON	2,955	2,830	3,270
	215.90	217.31	1.41		JUNCTION SR 137 NORTH OF MAYFIELD	2,955	2,830	3,270
	217.31	217.90	0.59		SOUTH INCORPORATED LIMITS STERLING	3,170	3,040	3,500
	217.90	222.92	5.02		NORTH INCORPORATED LIMITS STERLING	3,655	3,500	4,040
	222.92	224.67	1.75		SOUTH INCORPORATED LIMITS MANTI	7,650	7,330	8,450
	224.67	230.24	5.57		NORTH INCORPORATED LIMITS MANTI	5,505	5,270	6,080
	230.24	231.74	1.50		SOUTH INCORPORATED LIMITS EPHRAIM	6,310	6,040	6,970
	231.74	235.53	3.79		NORTH INCORPORATED LIMITS EPHRAIM	5,245	5,020	5,800
	235.53	244.92	9.39		JUNCTION SR 132 PIGEON HOLLOW JUNCTION	2,330	2,230	2,570
	244.92	246.11	1.19		SOUTH INCORPORATED LIMITS MOUNT PLEASANT	3,600	3,450	3,980
	246.11	246.63	0.52		JUNCTION SR 116 IN MOUNT PLEASANT	3,915	3,750	4,330
	246.63	251.47	4.84		NORTH INCORPORATED LIMITS MOUNT PLEASANT	2,960	2,840	3,270
	251.47	252.26	0.79		SOUTH INCORPORATED LIMITS FAIRVIEW	4,200	4,020	4,640
	252.26	252.69	0.43		JUNCTION SR 31 IN FAIRVIEW	2,810	2,690	3,110
	252.69	265.38	12.69		NORTH INCORPORATED LIMITS FAIRVIEW	1,980	1,900	2,190
	265.38	281.20	15.82		SANPETE - UTAH COUNTY LINE - SR 6 BILLIES MOUNTAIN	1,980	1,900	2,190
	281.20	282.74	1.54	*	JUNCTION SR 6 AT MOARK JUNCTION & SOUTH URBAN BOUND	3,230	3,450	2,680

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	282.74	283.52	0.78	SOUTH INCORPORATED LIMITS MAPLETON	4,225	4,520	3,500
	283.52	284.41	0.89	SOUTH OF MAPLETON	5,430	5,800	4,500
	284.41	284.62	0.21	IN MAPLETON	6,575	7,030	5,450
	284.62	285.68	1.06	JUNCTION SR 147 IN MAPLETON	8,200	8,760	6,790
	285.68	286.62	0.94	NORTH INC. LIMITS MAPLETON & S. INC. LIMITS SPRINGVILLE	7,720	8,250	6,390
	286.62	286.93	0.31	JUNCTION SR 51 APPROXIMATE 600 SOUTH IN SPRINGVILLE	15,710	16,790	13,010
	286.93	287.31	0.38	400 SOUTH VIA MAIN STREET IN SPRINGVILLE	17,085	18,260	14,150
	287.31	287.70	0.39	CENTER STREET IN SPRINGVILLE	19,595	20,940	16,230
	287.70	288.62	0.92	400 NORTH IN SPRINGVILLE	20,455	21,860	16,940
	288.62	289.05	0.43	JUNCTION SR 75 ROAD TO IRONTON INTERCHANGE	17,745	18,960	14,700
	289.05	292.23	3.18	NORTH INC. LIMITS SPRINGVILLE & SOUTH INC. LIMITS PROVO	17,230	18,410	14,270
	292.23	292.88	0.65	700 EAST IN PROVO	18,955	20,260	15,700
	292.88	293.61	0.73	SR 189 UNIVERSITY AVENUE IN PROVO VIA 300 SOUTH	23,075	24,660	19,110
	293.61	294.33	0.72	CENTER STREET SR 114 IN PROVO VIA 300 SOUTH	31,495	33,660	26,080
	294.33	294.77	0.44	800 NORTH FAU 3030 IN PROVO VIA 500 WEST	37,935	40,540	31,420
	294.77	295.69	0.92	1230 NORTH FAU 3032 IN PROVO VIA 500 WEST	49,855	53,280	41,290
	295.69	296.61	0.92	NORTH INC. LIMITS PROVO & SOUTH INC. LIMITS OREM	49,855	53,280	41,290
	296.61	297.26	0.65	UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265 IN OREM	45,440	48,560	37,630
	297.26	298.33	1.07	800 SOUTH STREET FAU 3042 IN OREM	48,655	52,000	40,300
	298.33	299.39	1.06	CENTER STREET IN OREM VIA STATE STREET	47,570	50,840	39,400
	299.39	300.45	1.06	800 NORTH SR 52 IN OREM	38,825	41,490	32,160
	300.45	301.02	0.57	1600 NORTH STREET IN OREM	25,600	27,360	21,200
	301.02	302.33	1.31	NORTH INC. LIMITS OREM & SOUTH INC. LIMITS LINDON	23,400	25,010	19,380
	302.33	303.28	0.95	NORTH INC. LIMITS LINDON & S. INC. LIMITS PLEASANT GROVE	21,770	23,270	18,030
	303.28	305.04	1.76	JUNCTION SR 114 MAIN STREET PLEASANT GROVE	16,200	17,310	13,420
	305.04	305.93	0.89	NORTHWEST INCORPORATED LIMITS PLEASANT GROVE	22,720	24,280	18,820
	305.93	306.16	0.23	JUNCTION SR 180 500 EAST AMERICAN FORK	30,875	33,000	25,570
	306.16	306.54	0.38	EAST INCORPORATED LIMITS AMERICAN FORK	30,875	33,000	25,570
	306.54	307.32	0.78	JUNCTION SR 74 100 EAST IN AMERICAN FORK	22,765	24,330	18,850

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	307.32	308.40	1.08		WEST INCORPORATED LIMITS AMERICAN FORK	12,650	13,520	10,480
	308.40	308.59	0.19		EAST URBAN BOUNDARY LEHI	14,110	15,080	11,690
	308.59	309.14	0.55		JUNCTION SR 73 SOUTHEAST OF LEHI	14,110	15,080	11,690
	309.14	311.27	2.13		SOUTHEAST INCORPORATED LIMITS LEHI	8,775	9,460	7,070
	311.27	311.49	0.22		DIVIDED HIGHWAY LEHI - FAI 15 URBAN BOUNDARY LEHI	6,185	6,660	4,990
	311.49	312.05	0.56	*	JUNCTION FAI 15 DRAPER CROSSROADS	18,205	19,460	15,080
	312.05	313.05	1.00		NORTH INC. LIMITS DRAPER & SOUTH INC. LIMITS SANDY	18,205	19,460	15,080
	313.05	314.54	1.49		10600 SOUTH	19,990	21,360	16,560
	314.54	315.06	0.52		9400 SOUTH VIA STATE STREET	20,990	22,430	17,380
	315.06	315.53	0.47		9000 SOUTH STREET	23,875	25,520	19,770
	315.53	315.93	0.40		8600 SOUTH STREET IN SANDY VIA STATE STREET	25,735	27,500	21,310
	315.93	316.54	0.61		NORTH INC. LIMITS SANDY & S. INC. LIMITS MIDVALE 8340 SOUTH	22,610	24,160	18,730
	316.54	316.92	0.38		7800 SOUTH STREET	37,755	40,350	31,270
	316.92	317.31	0.39		NORTH INCORPORATED LIMITS MIDVALE	37,755	40,350	31,270
	317.31	317.81	0.50		7200 SOUTH STREET	33,720	36,040	27,930
	317.81	318.07	0.26		SOUTH INCORPORATED LIMITS MURRAY VIA STATE STREET	35,135	37,550	29,100
	318.07	318.84	0.77		JUNCTION FAI 215 NEAR 6400 SOUTH IN MURRAY	35,135	37,550	39,100
	318.84	319.74	0.90		5900 SOUTH STREET IN MURRAY VIA STATE STREET	31,545	33,710	26,130
	319.74	320.31	0.57		5300 SOUTH STREET	31,890	34,080	26,410
	320.31	320.49	0.18		VINE STREET IN MURRAY VIA STATE STREET	31,890	34,080	26,410
	320.49	321.00	0.51		4800 SOUTH STREET IN MURRAY	33,085	35,360	27,400
	321.00	321.14	0.14		4500 SOUTH STREET IN MURRAY VIA STATE STREET	31,115	33,250	25,770
	321.14	321.87	0.73		NORTH INCORPORATED LIMITS MURRAY	30,460	32,550	25,230
	321.87	322.75	0.88		3900 SOUTH STREET VIA STATE STREET	29,685	31,720	24,590
	322.75	323.63	0.88		3300 SOUTH STREET & SOUTH INC. LIMITS SOUTH SALT LAKE	33,300	35,590	27,580
	323.63	324.02	0.39		2700 SOUTH STREET IN SOUTH SALT LAKE	38,055	40,670	31,520
	324.02	324.51	0.49		JUNCTION FAI 80 VIA STATE STREET IN SOUTH SALT LAKE	41,180	44,010	34,110
	324.51	325.07	0.56		2100 S. STREET N. INC. LIMITS S. SALT LAKE & S. INC. LIMITS S.L.C.	31,375	33,530	25,980
	325.07	325.62	0.55		1700 SOUTH STREET VIA STATE STREET IN SALT LAKE CITY	31,200	33,340	25,840

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	325.62	326.18	0.56	1300 SOUTH STREET IN SALT LAKE CITY	33,830	35,030	30,840
	326.18	326.93	0.75	900 SOUTH STREET IN SALT LAKE CITY	36,820	38,120	33,570
	326.93	327.53	0.60	400 SOUTH STREET VIA STATE STREET IN SALT LAKE CITY	32,235	33,370	29,390
	327.53	327.68	0.15	SOUTH TEMPLE STREET IN SALT LAKE CITY	31,250	32,350	28,490
	327.68	328.27	0.59	NORTH TEMPLE STREET IN SALT LAKE CITY	25,855	27,860	20,840
	328.27	329.01	0.74	300 WEST STREET VIA NORTH TEMPLE STREET	22,725	24,490	18,320
	329.01	329.88	0.87	600 NORTH VIA 300 WEST STREET IN SALT LAKE CITY	24,345	26,230	19,630
	329.88	331.96	2.08	VICTORY ROAD VIA 300 WEST STREET - FAI 15	34,520	37,200	27,830
	331.97	332.12	0.16	* JUNCTION FAI 15	29,500	31,790	23,780
	332.12	332.49	0.37	ORCHARD DRIVE	19,670	21,190	15,860
	332.49	333.52	1.03	CENTER STREET FAU 1072	14,770	15,910	11,910
	333.52	334.04	0.52	JUNCTION (OLD SR 93) WOODS CROSS	19,965	21,510	16,100
	334.04	334.45	0.41	N. INC. LM. N. SALT LAKE & S. INC. LM. BOUNTIFUL (2600 SOUTH)	32,970	35,530	26,580
	334.45	335.65	1.20	JUNCTION SR 106 PARKIN JUNCTION	18,220	19,630	14,690
	335.65	336.33	0.68	500 SOUTH STREET IN BOUNTIFUL VIA 500 WEST	27,595	29,730	22,250
	336.33	336.73	0.40	400 NORTH STREET SR 131-FAI 15	13,305	14,340	10,730
	336.74	337.07	0.34	* JUNCTION FAI 15 WEST OF FARMINGTON	34,245	36,600	28,360
	337.07	338.66	1.59	BURKE LANE	27,715	29,620	22,950
	338.66	339.00	0.34	JUNCTION SR 273	27,275	29,150	22,590
	339.00	340.03	1.03	N. INC. LIMITS FARMINGTON& S. INC. LIMITS FRUIT HEIGHTS	27,275	29,150	22,590
	340.03	341.18	1.15	JUNCTION 200 SOUTH IN FRUIT HEIGHTS	23,775	25,220	20,160
	341.18	342.04	0.86	NORTH INC. LIMITS FRUIT HEIGHTS & S. INC. LIMITS KAYSVILLE	26,785	28,410	22,710
	342.04	342.46	0.42	NORTH INC. LIMITS KAYSVILLE & SOUTH INC. LIMITS LAYTON	26,785	28,410	22,710
	342.46	345.59	3.13	JUNCTION SR 109 IN LAYTON	24,885	26,400	21,100
	345.59	345.91	0.32	JUNCTION SR 193 IN LAYTON	35,045	37,180	29,710
	345.91	346.16	0.25	NORTH INCORPORATED LIMITS LAYTON	35,045	37,180	29,710
	346.16	347.67	1.51	SOUTH INCORPORATED LIMITS SOUTH WEBER	34,910	37,030	29,600
	347.67	347.88	0.21	WEBER - DAVIS COUNTY LINE	34,910	37,030	29,600
	347.88	347.93	0.05	FAI 84 UINTAH JUNCTION	37,285	39,850	30,880

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE	DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	347.93	348.68	0.75	SOUTH INCORPORATED LIMITS UINTAH	37,285	39,850	30,880
	348.68	349.80	1.12	NORTH INCORPORATED LIMITS UINTAH	37,285	39,850	30,880
	349.80	349.95	0.15	HARRISON BOULEVARD	18,325	19,580	15,180
	349.95	350.67	0.72	SOUTH INCORPORATED LIMITS SOUTH OGDEN	18,325	19,580	15,180
	350.67	353.58	2.91	50TH STREET	21,560	22,700	18,700
	353.58	353.77	0.19	N. INC. LIMITS S. OGDEN& S. INC. LIMITS OGDEN 36TH STREET	21,630	22,780	18,760
	353.77	354.29	0.52	JUNCTION SR 26 RIVERDALE ROAD	26,295	27,690	22,810
	354.29	354.43	0.14	31ST STREET IN OGDEN VIA WASHINGTON BOULEVARD	28,100	29,590	24,370
	354.43	355.30	0.87	30TH STREET VIA WASHINGTON BOULEVARD	29,555	31,590	24,480
	355.30	355.88	0.58	24TH STREET SR 53 IN OGDEN	25,800	27,570	21,370
	355.88	356.78	0.90	20TH STREET IN OGDEN	25,115	26,840	20,800
	356.78	357.81	1.03	12TH STREET SR 39	28,850	30,830	23,890
	357.81	358.38	0.57	2ND STREET VIA WASHINGTON BOULEVARD	22,320	23,850	18,490
	358.38	358.74	0.36	NORTH INC. LIMITS OGDEN & S. INC. LIMITS HARRISVILLE BLVD.	22,320	23,850	18,490
	358.74	360.83	2.09	WALL AVENUE	20,145	21,530	16,680
	360.83	361.61	0.78	N. INC. LIMITS HARRISVILLE & S. INC. LIMITS PLEASANT VIEW	20,145	21,530	16,680
	361.61	363.79	2.18	JUNCTION SR 134 IN PLEASANT VIEW	11,075	11,930	8,930
	363.79	364.07	0.28	JUNCTION PLEASANT VIEW DRIVE	8,840	9,530	7,130
	364.07	364.55	0.48	BOX ELDER - WEBER COUNTY LINE	8,160	7,820	9,020
	364.55	367.63	3.08	JUNCTION SR 126	10,520	10,080	11,630
	367.63	370.01	2.38	SOUTH INCORPORATED LIMITS WILLARD	9,495	9,100	10,490
	370.01	371.12	1.11	JUNCTION SR 315 TO FAI 15	9,495	9,100	10,490
	371.12	372.05	0.93	NORTH INCORPORATED LIMITS WILLARD	10,715	10,260	11,840
	372.05	374.62	2.57	SOUTH INCORPORATED LIMITS PERRY	10,715	11,550	8,640
	374.62	374.75	0.13	N. INC. LIMITS PERRY & S. INC. LIMITS BRIGHAM CITY - SR 91	10,715	11,550	8,640
	374.75	375.54	0.79	* JUNCTION SR 91 IN LOGAN	24,200	25,860	20,040
	375.54	377.62	2.08	600 EAST IN LOGAN	18,115	19,360	15,000
	377.62	377.65	0.03	EAST INCORPORATED LIMITS LOGAN	18,115	19,360	15,000
	377.65	387.27	9.62	EAST URBAN BOUNDARY LOGAN	3,625	3,870	3,000

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00089	387.27	396.50	9.23		BOY SCOUT CAMP	2,410	2,380	2,480
	396.50	402.57	6.07		TONY GROVE RANGER STATION	2,155	2,130	2,220
	402.57	407.61	5.04		JUNCTION SR 243 ROAD TO BEAVER MOUNTAIN	1,710	1,690	1,760
	407.61	410.20	2.59		RICH - CACHE COUNTY LINE	1,710	1,690	1,760
	410.20	414.64	4.44		WEST INCORPORATED LIMITS GARDEN CITY	1,490	1,340	1,850
	414.64	415.84	1.20		JUNCTION SR 30 IN GARDEN CITY	1,705	1,550	2,100
	415.84	418.71	2.87		NORTH INC. LIMITS GARDEN CITY - UTAH - IDAHO STATE LINE	1,705	1,550	2,100
A00090	**0.00**	**0.48**	**0.48**	*	**JUNCTION SR 13 MAIN STREET**	**8,680**	**9,350**	**7,000**
	0.48	1.61	1.13		JUNCTION 600 EAST STREET - SR 91 BRIGHAM CITY	3,745		
A00091	**0.00**	**0.48**	**0.48**	*	**JUNCTION FAI 15**	**15,095**	**4,040**	**3,020**
	0.48	1.35	0.87		SOUTHWEST INCORPORATED LIMITS BRIGHAM CITY	15,095	14,850	15,720
	1.35	1.96	0.61		JUNCTION 500 WEST	18,835	18,520	19,610
	1.96	3.82	1.86		JUNCTION SR 89 AND MAIN STREET	12,330	12,130	12,840
	3.82	4.96	1.14		JUNCTION SR 90 IN BRIGHAM CITY	16,560	16,290	17,240
	4.96	5.63	0.67		EAST INCORPORATED LIMITS BRIGHAM CITY	16,560	16,290	17,240
	5.63	7.72	2.09		WEST INCORPORATED LIMITS MANTUA	15,245	14,990	15,880
	7.72	10.00	2.28		NORTH INCORPORATED LIMITS MANTUA	13,425	13,200	13,980
	10.00	16.59	6.59		CACHE - BOX ELDER COUNTY LINE	13,425	13,200	13,980
	16.59	16.86	0.27		SOUTH INCORPORATED LIMITS WELLSVILLE	13,425	13,200	13,980
	16.86	19.13	2.27		JUNCTION SR 23	13,425	13,200	13,980
	19.13	19.55	0.42		JUNCTION SR 101 IN WELLSVILLE	13,275	13,060	13,820
	19.55	23.27	3.72		NORTH INCORPORATED LIMITS WELLSVILLE	13,275	13,060	13,820
	23.27	24.27	1.00		SOUTHWEST URBAN BOUNDARY LOGAN	13,085	13,980	10,840
	24.27	25.60	1.33		SOUTH INCORPORATED LIMITS LOGAN	13,890	14,840	11,500
	25.60	26.19	0.59		JUNCTION SR 165	29,720	31,760	24,610
	26.19	26.83	0.64		JUNCTION SR 238 300 SOUTH LOGAN	27,020	28,880	22,380
	26.83	27.09	0.26		JUNCTION 200 NORTH SR 30 IN LOGAN VIA MAIN STREET	31,975	34,170	26,480
	27.09	28.51	1.42		400 NORTH SR 89 IN LOGAN	27,370	29,250	22,670
	28.51	28.89	0.38		NORTH INC. LIMITS LOGAN & SOUTH INC. LIMITS NORTH LOGAN	25,830	27,600	21,390

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00091	28.89	29.78	0.89		NORTH URBAN BOUNDARY LOGAN	25,830	27,600	21,390
	29.78	30.59	0.81		JUNCTION 2500 NORTH TO AIRPORT IN NORTH LOGAN	24,950	26,660	20,660
	30.59	31.26	0.67		NORTH INCORPORATED LIMITS NORTH LOGAN	25,490	27,240	21,110
	31.26	31.81	0.55		JUNCTION SR 237 ROAD TO HYDE PARK	25,490	27,240	21,110
	31.81	32.41	0.60		NORTH INCORPORATED LIMITS HYDE PARK	25,490	27,240	21,110
	32.41	33.98	1.57		SOUTH INCORPORATED LIMITS SMITHFIELD	20,975	22,420	17,370
	33.98	34.98	1.00		JUNCTION SR 218 IN SMITHFIELD	14,205	15,180	11,760
	34.98	35.50	0.52		NORTH INCORPORATED LIMITS SMITHFIELD	9,815	10,580	7,910
	35.50	38.64	3.14		NORTH URBANIZED BOUNDARY	9,815	10,580	7,910
	38.64	39.96	1.32		SOUTH INCORPORATED LIMITS RICHMOND	9,560	10,570	9,160
	39.96	41.15	1.19		JUNCTION SR 142 IN RICHMOND	9,685	9,720	9,610
	41.15	43.24	2.09		NORTH INCORPORATED LIMITS RICHMOND	8,195	8,220	8,130
	43.24	43.64	0.40		SOUTH INCORPORATED LIMITS LEWISTON	8,195	8,220	8,130
	43.64	43.89	0.25		JUNCTION SR 61 IN LEWISTON	5,410	5,430	5,370
	43.89	45.22	1.33		NORTH INC. LIMITS LEWISTON - UTAH - IDAHO STATE LINE	5,410	5,430	5,370
A00092	**0.00**	**3.73**	**3.73**	*	**JUNCTION FAI 15 NORTH OF LEHI**	**9,250**	**9,970**	**7,460**
	3.73	5.65	1.92		JUNCTION 6800 WEST	8,460	9,120	6,820
	5.65	7.40	1.75		JUNCTION SR 74	8,200	8,840	6,610
	7.40	7.81	0.41		JUNCTION SR 146 SOUTHEAST OF ALPINE	2,000	2,020	1,940
	7.81	9.52	1.71		WEST URBAN BOUNDARY	2,000	2,020	1,940
	9.52	22.50	12.98		WEST BOUNDARY TIMPANOGOS NATIONAL MONUMENT	750	760	730
	22.50	27.18	4.68		ASPEN GROVE - SR 189 PROVO CANYON	900	910	870
A00093	**0.00**	**0.35**	**0.35**	*	**JUNCTION FAI 15 - JUNCTION SR 89 VIA 2600 SOUTH**	**26,130**	**28,160**	**21,070**
A00094	**0.00**	**0.94**	**0.94**	*	**JUNCTION FAI 70 - THOMPSON**	**615**	**660**	**500**
A00095	**0.00**	**16.15**	**16.15**	*	**JUNCTION SR 24 IN HANKSVILLE**	**625**	**580**	**750**
	16.15	26.14	9.99		WAYNE - GARFIELD COUNTY LINE	625	580	750
	26.14	47.43	21.29		JUNCTION SR 276	335	320	370
	47.43	83.65	36.22		GARFIELD - SAN JUAN COUNTY LINE	335	320	370
	83.65	91.26	7.61		JUNCTION SR 276 TO HALLS CROSSING	335	320	370

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00095	91.26	121.50	30.24		JUNCTION SR 275 ROAD TO NATURAL BRIDGES - SR 191	465	450	510
A00096	**0.00**	**5.69**	**5.69**	*	**CLEAR CREEK**	**480**	**490**	**470**
	5.69	6.56	0.87		SOUTH INCORPORATED LIMITS SCOFIELD	610	620	590
	6.56	13.57	7.01		NORTH INCORPORATED LIMITS SCOFIELD	750	760	730
	13.57	22.65	9.08		CARBON - UTAH COUNTY LINE - JUNCTION SR 6	750	760	730
A00097	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 108**	**9,335**	**10,060**	**7,530**
	0.50	1.25	0.75		WEST INCORPORATED LIMITS ROY VIA 5600 SOUTH	10,940	11,790	8,820
	1.25	2.01	0.76		JUNCTION 2500 WEST STREET	17,275	18,610	13,930
	2.01	2.27	0.26		JCT. SR 126 VIA 5600 SOUTH - ENTRANCE HILL AIR FORCE BASE	23,385	25,200	18,850
A00098	**0.00**	**2.03**	**2.03**	*	**JUNCTION SR 37 HOOPER**	**3,055**	**3,090**	**2,960**
	2.03	3.02	0.99		WEST URBAN BOUNDARY - SR 108	4,155	4,480	3,350
A00099	**0.00**	**1.18**	**1.18**	*	**JUNCTION FAI 15**	**3,040**	**3,080**	**2,950**
	1.18	3.10	1.92		SOUTH INCORPORATED LIMITS FILLMORE	2,695	2,730	2,610
	3.10	4.08	0.98		JUNCTION SR 100 IN FILLMORE	5,000	5,060	4,850
	4.08	4.20	0.12		NORTH INCORPORATED LIMITS FILLMORE - FAI 15	2,685	2,720	2,600
A00100	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 99 IN FILLMORE**	**850**	**860**	**820**
	1.60	4.67	3.07		WEST INCORPORATED LIMITS FILLMORE	735	740	710
	4.67	16.98	12.31		JUNCTION LOCAL ROAD EAST OF FLOWELL - JUNCTION SR 50	515	520	500
A00101	**0.00**	**1.21**	**1.21**	*	**JUNCTION SR 23 IN WELLSVILLE**	**2,345**	**2,370**	**2,270**
	1.21	1.82	0.61		JUNCTION SR 91	3,775	3,820	3,660
	1.82	3.09	1.27		EAST INCORPORATED LIMITS WELLSVILLE	3,555	3,600	3,450
	3.09	5.91	2.82		WEST INCORPORATED LIMITS HYRUM	3,515	3,560	3,410
	5.91	6.02	0.11		JUNCTION SR 165 IN HYRUM	1,115	1,130	1,080
	6.02	8.10	2.08		EAST INCORPORATED LIMITS HYRUM	985	1,000	960
	8.10	21.23	13.13		WASATCH NATIONAL FOREST BOUNDARY	885	900	860
	21.23	21.73	0.50		HARDWARE RANCH - VISITORS CENTER	730	740	710
A00102	**0.00**	**9.40**	**9.40**	*	**JUNCTION SR 83**	**750**	**760**	**730**
	9.40	14.13	4.73		THATCHER	1,380	1,400	1,340
	14.13	14.39	0.26		JUNCTION FAI 84	4,200	4,250	4,070

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00102	14.39	17.50	3.11		WEST INCORPORATED LIMITS TREMONTON	7,125	7,210	6,910
	17.50	18.00	0.50		JUNCTION SR 13	3,460	3,500	3,360
	18.00	19.86	1.86		EAST INCORPORATED LIMITS TREMONTON	2,855	2,890	2,770
	19.86	20.07	0.21		DEWEYVILLE WEST INCORPORATED LIMITS - JUNCTION SR 38	3,315	3,350	3,220
A00103	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 126 - 600 NORTH ENTRANCE HILL AFB**	**25,860**	**27,860**	**20,850**
A00104	**0.00**	**0.78**	**0.78**	*	**JUNCTION SR 126 AT WILSON**	**11,990**	**12,130**	**11,630**
	0.78	1.00	0.22		JUNCTION FAI 15	11,855	12,000	11,500
	1.00	1.51	0.51		WEST URBAN BOUNDARY OGDEN	11,855	12,000	11,500
	1.51	1.88	0.37		WEST INCORPORATED LIMITS OGDEN	12,625	13,600	10,180
	1.88	2.49	0.61		BEGIN DIVIDED HIGHWAY - WALL AVENUE EASTBOUND	6,315	6,800	5,090
	2.49	3.08	0.59	*	ONE WAY COUPLET WESTBOUND - END OF DIVIDED	6,315	6,800	5,090
A00105	**0.00**	**0.70**	**0.70**	*	**JUNCTION FAI 15 - SR 106 PARRISH LANE CENTERVILLE**	**18,175**	**19,580**	**14,650**
A00106	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 89 IN BOUNTIFUL**	**9,810**	**10,570**	**7,910**
	0.64	1.32	0.68		1500 SOUTH STREET FIVE POINTS	12,910	13,910	10,410
	1.32	1.98	0.66		500 SOUTH STREET	10,880	11,720	8,770
	1.98	2.23	0.25		400 NORTH STREET	14,520	15,650	11,710
	2.23	2.74	0.51		JUNCTION MAIN STREET VIA 400 NORTH	13,165	14,190	10,610
	2.74	3.02	0.28		1000 NORTH STREET	11,410	12,290	9,200
	3.02	4.23	1.21		NORTH INC. LIMITS BOUNTIFUL & S. INC. LIMITS CENTERVILLE	10,175	10,960	8,200
	4.23	6.39	2.16		JUNCTION SR 105 PARRISH LANE	12,375	13,330	9,980
	6.39	8.50	2.11		NORTH INC. LIMITS CENTERVILLE & S. INC. LIMITS FARMINGTON	5,655	6,090	4,560
	8.50	9.50	1.00		JUNCTION SR 227 STATE STREET FARMINGTON	10,715	11,550	8,640
	9.50	10.25	0.75		JUNCTION SR 225 IN FARMINGTON	4,980	5,370	4,010
	10.25	10.62	0.37		JUNCTION SR 272 IN FARMINGTON - SR 89	6,210	6,060	6,590
A00107	**0.00**	**2.50**	**2.50**	*	**JUNCTION SR 110**	**3,770**	**3,680**	**4,000**
	2.50	3.00	0.50		JUNCTION SR 108 IN WEST POINT	7,120	6,950	7,550
	3.00	3.08	0.08		EAST INCORPORATED LIMITS WEST POINT	7,430	7,250	7,880
	3.08	3.51	0.43		WEST INCORPORATED LIMITS CLEARFIELD	7,430	7,250	7,880
	3.51	4.50	0.99		1000 WEST - JUNCTION SR 126 IN CLEARFIELD	10,045	9,800	10,650

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00108	**0.00**	**0.92**	**0.92**	*	**JUNCTION SR 232**	**12,660**	**13,640**	**10,210**
	0.92	1.45	0.53		JUNCTION FAI 15 SYRACUSE INTERCHANGE	31,455	33,890	25,360
	1.45	1.75	0.30		JUNCTION SR 126	26,835	28,920	21,630
	1.75	2.32	0.57		1000 WEST INC. LIMITS LAYTON& EAST INC. LIMITS CLEARFIELD	21,425	23,090	17,270
	2.32	3.75	1.43		ENTRANCE TO FREEPORT CENTER	12,575	13,550	10,140
	3.75	4.84	1.09		WEST INC. LIMITS CLEARFIELD & EAST INC. LIMITS SYRACUSE	12,575	13,550	10,140
	4.84	6.22	1.38	*	JUNCTION SR 127 IN SYRACUSE	5,070	5,460	4,090
	6.22	6.75	0.53		NORTH INC. LIMITS SYRACUSE & SOUTH INC. LIMITS WEST POINT	3,775	4,070	3,040
	6.75	7.25	0.50		JUNCTION SR 107 IN WEST POINT	4,275	4,610	3,450
	7.25	8.26	1.01		NORTH INC. LIMITS WEST POINT & SOUTH INC. LIMITS CLINTON	4,745	5,110	3,830
	8.26	9.14	0.88		JUNCTION SR 37 IN CLINTON	4,790	5,160	3,860
	9.14	9.63	0.49		DAVIS-WEBER CNTY LINE INC. LIMITS CLINTON& S. INC. LM ROY	6,800	7,330	5,480
	9.63	9.76	0.13		WEST INCORPORATED LIMITS ROY	6,800	7,330	5,480
	9.76	12.09	2.33		JUNCTION 5600 SOUTH STREET SR 97	7,265	7,830	5,860
	12.09	13.67	1.58		JUNCTION SR 37 4000 SOUTH STREET - SR 126	9,725	10,480	7,840
A00109	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 126**	**16,245**	**17,500**	**13,100**
	0.44	1.41	0.97		JUNCTION 425 EAST STREET (FORT LANE) LAYTON	13,570	14,620	10,940
	1.41	2.96	1.55		EAST INCORPORATED LIMITS OF LAYTON - SR 89	5,835	6,290	4,700
A00110	**0.00**	**0.68**	**0.68**	*	**JUNCTION SR 127**	**930**	**910**	**990**
	0.68	1.98	1.30		SOUTH INCORPORATED LIMITS WEST POINT	930	910	990
	1.98	3.47	1.49		JUNCTION SR 107 - JUNCTION SR 37 WEST OF CLINTON	1,230	1,200	1,300
A00111	**0.00**	**2.31**	**2.31**	*	**JUNCTION SR 48 EAST OF COPPERTON**	**2,965**	**2,840**	**3,280**
	2.31	4.42	2.11		7800 SOUTH NORTH INCORPORATED LIMITS WEST JORDAN	3,025	2,900	3,340
	4.42	5.70	1.28		SOUTH INCORPORATED LIMITS WEST VALLEY CITY	3,025	2,900	3,340
	5.70	7.03	1.33		5400 SOUTH STREET SR 173	6,280	6,020	6,940
	7.03	8.06	1.03		BACCHUS(URBANIZED BOUNDARY)	9,945	10,720	8,020
	8.06	9.07	1.01		4100 SOUTH NORTH INCORPORATED LIMITS WEST VALLEY CITY	13,000	14,010	10,480
	9.07	9.56	0.49		JUNCTION 3500 SOUTH SR 171 VIA 8400 WEST	13,935	15,020	11,230
	9.56	10.55	0.99		3100 SOUTH IN MAGNA - 2100 SOUTH	10,000	10,780	8,060

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00112	**0.00**	**0.61**	**0.61**	*	**JUNCTION SR 138**	**5,805**	**5,870**	**5,630**
	0.61	6.83	6.22		EAST INCORPORATED LIMITS GRANTSVILLE	5,805	5,870	5,630
	6.83	8.57	1.74		WEST INCORPORATED LIMITS TOOELE - JUNCTION SR 36	6,810	6,650	7,220
A00113	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 189**	**1,390**	**1,410**	**1,350**
	1.48	3.27	1.79		NORTH INCORPORATED LIMITS CHARLESTON	1,775	1,800	1,720
	3.27	3.89	0.62		SOUTH INCORPORATED LIMITS MIDWAY	2,105	2,130	2,040
	3.89	4.76	0.87		JUNCTION SR 224 IN MIDWAY	6,455	6,530	6,260
	4.76	6.27	1.51		EAST INCORPORATED LIMITS MIDWAY	6,260	6,340	6,070
	6.27	7.11	0.84		WEST INCORPORATED LIMITS HEBER - SR 40 IN HEBER	6,155	6,230	5,970
A00114	**0.00**	**0.91**	**0.91**	*	**JUNCTION 500 WEST STREET IN PROVO**	**34,365**	**36,730**	**28,460**
	0.91	1.42	0.51		JUNCTION FAI 15 VIA CENTER STREET	17,300	18,490	14,330
	1.42	2.21	0.79		2050 WEST IN PROVO	7,990	8,610	6,440
	2.21	4.84	2.63		NORTH INCORPORATED LIMITS PROVO	7,990	8,610	6,440
	4.84	6.44	1.60		JUNCTION SR 265 SOUTH INCORPORATED LIMITS OREM	6,000	6,470	4,840
	6.44	7.47	1.03		CENTER STREET OREM	7,620	8,210	6,140
	7.47	8.47	1.00		800 NORTH OREM SR 52	9,790	10,550	7,890
	8.47	10.26	1.79		JUNCTION SR 241 N. INC. LIMITS OREM & S. INC. LIMITS LINDON	12,170	13,110	9,810
	10.26	10.73	0.47		N. INC. LIMITS LINDON & S. INC. LIMITS PLEASANT GROVE - SR 89	12,170	13,110	9,810
A00115	**0.00**	**0.65**	**0.65**	*	**JUNCTION SR 6**	**10,820**	**11,660**	**8,720**
	0.65	0.77	0.12		NORTH INCORPORATED LIMITS PAYSON	8,525	9,190	6,870
	0.77	2.03	1.26		JUNCTION FAI 15	1,175	1,150	1,250
	2.03	3.71	1.68		NORTH URBAN BOUNDARY PAYSON	1,175	1,150	1,250
	3.71	5.87	2.16		JUNCTION SR 147 BENJAMIN VIA 3200 WEST	585	630	470
	5.87	6.22	0.35		1400 WEST STREET VIA 7300 SOUTH	1,115	1,200	900
	6.22	7.80	1.58		WEST URBAN BOUNDARY	1,565	1,530	1,660
	7.80	8.27	0.47		WEST INCORPORATED LIMITS SPANISH FORK - SR 156	1,500	1,460	1,590
A00116	**0.00**	**0.18**	**0.18**	*	**JUNCTION SR 132**	**2,625**	**2,510**	**2,900**
	0.18	6.50	6.32		EAST INCORPORATED LIMITS MORONI	2,895	2,770	3,200
	6.50	7.04	0.54		WEST INC. LIMITS MOUNT PLEASANT - JUNCTION SR 89	2,970	2,850	3,280

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00117	**0.00**	**0.83**	**0.83**	*	**JUNCTION LOCAL ROAD AT 200 WEST IN WALES**	**220**	**220**	**210**
	0.83	4.90	4.07		SOUTH INCORPORATED LIMITS WALES	610	620	590
	4.90	7.13	2.23		JUNCTION SR 132	650	660	630
	7.13	8.28	1.15		JUNCTION SR 89	735	740	710
	8.28	9.18	0.90		WEST INCORPORATED LIMITS SPRING CITY	750	760	730
	9.18	12.17	2.99		NORTH INCORPORATED LIMITS SPRING CITY - JUNCTION SR 89	1,325	1,340	1,290
A00118	**0.00**	**0.50**	**0.50**	*	**JUNCTION FAI 70**	**805**	**810**	**780**
	0.50	0.86	0.36		JUNCTION CENTER STREET IN JOSEPH	550	560	530
	0.86	5.37	4.51		EAST INCORPORATED LIMITS JOSEPH	620	630	600
	5.37	6.72	1.35		WEST INCORPORATED LIMITS MONROE	2,685	2,720	2,600
	6.72	10.09	3.37		NORTH INCORPORATED LIMITS MONROE	2,770	2,800	2,690
	10.09	12.61	2.52		JUNCTION SR 258	3,870	3,920	3,750
	12.61	14.74	2.13		SOUTH URBAN BOUNDARY	3,780	3,690	4,010
	14.75	15.12	0.38		JUNCTION SR 120	6,785	7,310	5,470
	15.12	15.54	0.42		400 EAST VIA 300 NORTH RICHFIELD	5,835	6,290	4,700
	15.54	15.71	0.17		JUNCTION SR 119	4,075	3,980	4,320
	15.71	21.38	5.67		EAST URBAN BOUNDARY RICHFIELD	4,075	3,980	4,320
	21.38	23.57	2.19		JUNCTION LOCAL ROAD	4,170	4,070	4,420
	23.57	24.08	0.51		SOUTHWEST INCORPORATED LIMITS SIGURD - JUNCTION SR 24	4,170	4,070	4,420
A00119	**0.00**	**0.16**	**0.16**	*	**JUNCTION SR 118 EAST INCORPORATED LIMITS RICHFIELD**	**2,485**	**2,420**	**2,640**
	0.16	4.14	3.98		EAST URBAN BOUNDARY RICHFIELD	2,300	2,330	2,230
	4.14	8.80	4.66		JUNCTION LOCAL ROAD TO GLENWOOD - JUNCTION SR 24	1,175	1,190	1,140
A00120	**0.00**	**1.02**	**1.02**	*	**JUNCTION FAI 70 (SOUTH RICHFIELD INTERCHANGE)**	**4,120**	**4,400**	**3,410**
	1.02	2.32	1.30		JUNCTION SR 118	12,250	13,090	10,150
	2.32	2.61	0.29		CENTER STREET VIA MAIN STREET	13,100	14,000	10,850
	2.61	3.34	0.73		JUNCTION SR 118 300 NORTH IN RICHFIELD	5,125	5,480	4,240
	3.34	3.90	0.56		NORTH INCORPORATED LIMITS RICHFIELD - JUNCTION FAI 70	3,570	3,820	2,960
A00121	**0.00**	**2.68**	**2.68**	*	**JUNCTION SR 40**	**3,650**	**3,690**	**3,540**
	2.68	4.95	2.27		NORTHWEST INCORPORATED LIMITS ROOSEVELT	3,900	3,950	3,780

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00121	4.95	9.97	5.02		LOCAL ROAD TO CEDARVIEW	1,720	1,740	1,670
	9.97	12.77	2.80		NEOLA	870	880	840
	12.77	17.43	4.66		DUCHESNE - UINTAH COUNTY LINE	410	410	400
	17.43	23.73	6.30		JUNCTION LOCAL ROAD TO BALLARD	635	640	620
	23.73	37.64	13.91		LA POINT	1,140	1,150	1,110
	37.64	38.66	1.02		MAESER WEST URBAN BOUNDARY VERNAL	2,700	2,910	2,180
	38.66	40.13	1.47		WEST INCORPORATED LIMITS VERNAL - SR 40 IN VERNAL	5,995	6,460	4,830
A00122	**0.00**	**0.45**	**0.45**	*	**HIAWATHA (RR XING)**	**665**	**670**	**650**
	0.45	8.79	8.34		EAST INCORPORATED LIMITS HIAWATHA - JUNCTION SR 10	1,455	1,470	1,410
A00123	**0.00**	**7.12**	**7.12**	*	**JUNCTION SR 6**	**3,715**	**3,760**	**3,600**
	7.12	8.72	1.60		WEST INCORPORATED LIMITS EAST CARBON CITY	4,225	4,280	4,100
	8.72	9.59	0.87		JUNCTION SR 124	3,775	3,820	3,660
	9.59	10.84	1.25		E. INC. LIMITS EAST CARBON CITY & W. INC. LIMITS SUNNYSIDE	1,475	1,490	1,430
	10.84	11.46	0.62		NORTH INC. LIMITS SUNNYSIDE - ENTER SUNNYSIDE MINE	500	510	490
A00124	**0.00**	**2.47**	**2.47**	*	**GENEVA COAL MINE**	**280**	**300**	**230**
	2.47	5.42	2.95		CARBON - EMERY COUNTY LINE	280	300	230
	5.42	7.96	2.54		SOUTH INC. LIMITS EAST CARBON CITY - JUNCTION SR 123	400	430	320
A00125	**0.00**	**7.43**	**7.43**	*	**JUNCTION SR 50**	**1,115**	**1,130**	**1,080**
	7.43	9.19	1.76		JUNCTION LOCAL ROAD	1,115	1,130	1,080
	9.19	10.12	0.93		SOUTH INCORPORATED LIMITS OAK CITY	685	690	660
	10.12	21.54	11.42		NORTH INCORPORATED LIMITS OAK CITY	240	240	230
	21.54	22.15	0.61		SOUTH INCORPORATED LIMITS LEAMINGTON - JUNCTION SR 132	220	220	210
A00126	**0.00**	**0.49**	**0.49**	*	**JUNCTION FAI 15**	**17,745**	**19,120**	**14,310**
	0.49	1.58	1.09		GENTILE STREET IN LAYTON SR 109	20,695	22,300	16,680
	1.58	3.20	1.62		JUNCTION SR 232 HILLFIELD ROAD	20,105	21,660	16,210
	3.20	3.39	0.19		JUNCTION SR 108 SYRACUSE ROAD	19,125	20,610	15,420
	3.39	4.45	1.06		NORTH INC. LIMITS LAYTON& SOUTH INC. LIMITS CLEARFIELD	18,150	19,560	14,630
	4.45	5.64	1.19		JUNCTION SR 193 700 SOUTH STREET	25,805	27,810	20,800
	5.64	5.98	0.34		JUNCTION SR 107 300 NORTH STREET	25,990	28,000	20,950

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00126	5.98	6.14	0.16		JUNCTION SR 103	25,990	28,000	20,950
	6.14	7.13	0.99		NORTH INC. LIMITS CLEARFIELD & SOUTH INC. LIMITS SUNSET	21,360	23,020	17,220
	7.13	8.02	0.89		JUNCTION SR 37 IN SUNSET	26,920	29,010	21,700
	8.02	8.65	0.63		DAVIS-WEBER COUNTY LINE INC. LIMITS SUNSET& S. INC. LM ROY	26,920	29,010	21,700
	8.65	9.04	0.39		5600 SOUTH SR 97 IN ROY	32,810	35,350	26,450
	9.04	10.15	1.11		RIVERDALE ROAD SR 26	23,990	25,850	19,340
	10.15	10.65	0.50		4400 SOUTH STREET FAU 2022 IN ROY	24,890	26,820	20,070
	10.65	11.13	0.48		4000 SOUTH STREET FAU 2030	24,890	26,820	20,070
	11.13	11.32	0.19		JUNCTION SR 79	12,575	13,550	10,140
	11.32	11.65	0.33		NORTH INCORPORATED LIMITS ROY	12,575	13,550	10,140
	11.65	13.27	1.62		JUNCTION SR 108	12,795	13,790	10,320
	13.27	14.36	1.09		JUNCTION SR 104 WILSON LANE	14,455	13,850	15,970
	14.36	18.64	4.28		JUNCTION SR 39 1200 SOUTH STREET	7,580	8,170	6,110
	18.64	20.75	2.11		JUNCTION SR 134 EAST OF PLAIN CITY	4,190	4,510	3,380
	20.75	21.08	0.33		WEBER - BOX ELDER COUNTY LINE	4,135	4,180	4,010
	21.08	21.49	0.41		JUNCTION FAI 15 - SR 89	6,490	6,570	6,300
A00127	**0.00**	**0.97**	**0.97**	*	**JUNCTION SR 110**	**1,555**	**1,570**	**1,510**
	0.97	1.04	0.07		SOUTHWEST URBAN BOUNDARY	1,430	1,400	1,520
	1.04	1.72	0.68		WEST INCORPORATED LIMITS SYRACUSE	1,430	1,400	1,520
	1.72	2.01	0.29		JUNCTION BLUFF ROAD	2,260	2,440	1,820
	2.01	2.51	0.50		2500 WEST STREET - JUNCTION SR 108 SYRACUSE	3,100	3,340	2,500
A00128	**0.00**	**15.59**	**15.59**	*	**JUNCTION SR 191 NORTH OF MOAB**	**695**	**700**	**670**
	15.59	44.73	29.14		LOCAL ROAD TO CASTLE VALLEY - JUNCTION FAI 70	595	600	580
A00130	**0.00**	**0.21**	**0.21**	*	**JUNCTION FAI 15**	**5,600**	**5,980**	**4,640**
	0.21	1.74	1.53		SOUTH INCORPORATED LIMITS OF CEDAR CITY	10,740	11,480	8,890
	1.74	2.22	0.48		400 SOUTH IN CEDAR CITY	26,875	28,720	22,260
	2.22	2.47	0.25		JUNCTION SR 14 IN CEDAR CITY	23,250	24,850	19,260
	2.47	2.95	0.48		JUNCTION SR 56 IN CEDAR CITY	19,820	21,180	16,420
	2.95	5.31	2.36		600 NORTH IN CEDAR CITY	13,425	14,350	11,120

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00130	5.31	5.53	0.22		NORTH CEDAR CITY INTERCHANGE	6,045	6,510	4,870
	5.53	8.37	2.84		NORTH INCORPORATED LIMITS CEDAR CITY	3,405	3,670	2,750
	8.37	18.88	10.51		JUNCTION LOCAL ROAD WEST OF ENOCH	835	800	920
	18.88	36.64	17.76		JUNCTION LOCAL ROAD TO PAROWAN GAP	850	810	940
	36.64	41.48	4.84		IRON - BEAVER COUNTY LINE	820	790	910
	41.48	42.08	0.60		SOUTH INCORPORATED LIMITS MINERSVILLE	860	820	950
	42.08	42.24	0.16		NORTH INCORPORATED LIMITS MINERSVILLE - JUNCTION SR 21	775	740	860
A00131	**0.00**	**0.24**	**0.24**	*	**JUNCTION FAI 15**	**14,055**	**15,140**	**11,330**
	0.24	0.58	0.34		500 WEST BOUNTIFUL - 200 WEST	16,995	18,310	13,700
A00132	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 6**	**1,465**	**1,400**	**1,620**
	0.50	3.77	3.27		NORTHEAST INCORPORATED LIMITS LYNNDYL	1,615	1,550	1,780
	3.77	5.37	1.60		WEST INCORPORATED LIMITS LEAMINGTON	1,545	1,480	1,710
	5.37	5.55	0.18		JUNCTION SR 125 IN LEAMINGTON	1,250	1,200	1,380
	5.55	8.67	3.12		EAST INCORPORATED LIMITS LEAMINGTON	1,255	1,200	1,390
	8.67	20.02	11.35		MILLARD - JUAB COUNTY LINE	1,515	1,450	1,670
	20.02	31.82	11.80		JUNCTION LOCAL ROAD	1,515	1,450	1,670
	31.82	32.95	1.13		JUNCTION LOCAL ROAD	1,705	1,630	1,880
	32.95	33.33	0.38		WEST INCORPORATED LIMITS NEPHI	2,450	2,350	2,710
	33.33	34.39	1.06		JUNCTION SR 41 IN NEPHI	3,445	3,300	3,810
	34.39	34.89	0.50		JUNCTION FAI 15	3,795	3,640	4,190
	34.89	41.99	7.10		EAST INCORPORATED LIMITS NEPHI	2,525	2,420	2,790
	41.99	47.07	5.08		JUAB - SANPETE COUNTY LINE	2,355	2,260	2,600
	47.07	48.41	1.34		NORTH INCORPORATED LIMITS FOUNTAIN GREEN	2,800	2,680	3,090
	48.41	54.60	6.19		SOUTH INCORPORATED LIMITS FOUNTAIN GREEN	3,500	3,350	3,870
	54.60	56.01	1.41		NORTH INCORPORATED LIMITS MORONI	3,300	3,160	3,650
	56.01	56.33	0.32		JUNCTION SR 116 IN MORONI	2,995	2,870	3,310
	56.33	59.51	3.18		SOUTH INCORPORATED LIMITS MORONI	3,100	2,970	3,430
	59.51	63.37	3.86		JUNCTION SR 117 AT CHESTER - JUNCTION SR 89	2,885	2,760	3,190
A00133	**0.00**	**1.21**	**1.21**	*	**SOUTH INCORPORATED LIMITS KANOSH**	**845**	**860**	**820**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00133	1.21	6.26	5.05		NORTH INCORPORATED LIMITS KANOSH	1,025	1,040	990
	6.26	7.13	0.87		SOUTH INCORPORATED LIMITS MEADOW	1,235	1,250	1,200
	7.13	7.20	0.07		NORTH INCORPORATED LIMITS MEADOW - JUNCTION FAI 15	2,625	2,660	2,550
A00134	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 37**	**2,360**	**2,390**	**2,290**
	1.00	3.79	2.79		WEST HAVEN INCORPORATED LIMITS	2,360	2,390	2,290
	3.79	6.27	2.48		JUNCTION SR 39 12TH STREET	1,850	1,870	1,790
	6.27	9.06	2.79		SOUTH INCORPORATED LIMITS PLAIN CITY	2,325	2,350	2,260
	9.06	11.33	2.27		EAST INCORPORATED LIMITS PLAIN CITY	4,250	4,300	4,120
	11.33	11.59	0.26		JUNCTION FAI 15	12,695	13,570	10,510
	11.59	12.38	0.79		WEST INCORPORATED LIMITS PLEASANT VIEW - SR 89	10,095	10,790	8,360
A00136	**0.00**	**3.46**	**3.46**	*	**JUNCTION SR 50 - JUNCTION SR 6 UNCONSTRUCTED**	**NA**	**NA**	**NA**
A00137	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 89**	**1,600**	**1,620**	**1,550**
	0.62	6.50	5.88		EAST INCORPORATED LIMITS GUNNISON	1,045	1,060	1,010
	6.50	8.32	1.82		WEST INCORPORATED LIMITS MAYFIELD	920	930	890
	8.32	11.33	3.01		NORTH INCORPORATED LIMITS MAYFIELD - JUNCTION SR 89	345	350	330
A00138	**0.00**	**4.29**	**4.29**	*	**JUNCTION FAI 80 AT STANSBURY**	**1,075**	**1,090**	**1,040**
	4.29	7.32	3.03		JUNCTION LOCAL ROAD (OLD US 50A)	2,700	2,730	2,620
	7.32	12.14	4.82		NORTH INCORPORATED LIMITS GRANTSVILLE	4,450	4,500	4,320
	12.14	12.38	0.24		JUNCTION SR 112 IN GRANTSVILLE	2,710	2,740	2,630
	12.38	20.38	8.00		EAST INCORPORATED LIMITS GRANTSVILLE - JUNCTION SR 36	2,395	2,420	2,320
A00139	**0.00**	**1.41**	**1.41**	*	**JUNCTION SR 6 - SR 157 SOUTH OF HELPER**	**2,670**	**2,700**	**2,590**
A00140	**0.00**	**2.55**	**2.55**	*	**JUNCTION SR 68 AT BLUFFDALE - FAI 15**	**2,445**	**2,630**	**1,970**
A00141	**0.00**	**2.97**	**2.97**	*	**JUNCTION SR 6**	**300**	**300**	**290**
	2.97	6.61	3.64		NORTHEAST INC. LIMITS GENOLA - SR 147 10400 SOUTH	685	690	660
A00142	**0.00**	**0.03**	**0.03**	*	**JUNCTION SR 23**	**745**	**800**	**600**
	0.03	4.48	4.45		NORTHWEST INCORPORATED LIMITS NEWTON	745	800	600
	4.48	4.96	0.48		SOUTH INCORPORATED LIMITS CLARKSTON	560	600	450
	4.96	5.37	0.41		CENTER STREET INCORPORATED LIMITS CLARKSTON	660	670	640
	5.37	9.44	4.07		EAST INCORPORATED LIMITS CLARKSTON	700	710	680

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00142	9.44	9.71	0.27		WEST INCORPORATED LIMITS TRENTON	975	990	950
	9.71	12.07	2.36		JUNCTION SR 23 IN TRENTON	1,075	1,090	1,040
	12.07	14.10	2.03		EAST INCORPORATED LIMITS TRENTON	1,075	1,270	1,220
	14.10	15.34	1.24		WEST INCORPORATED LIMITS LEWISTON	1,075	1,270	1,220
	15.34	16.63	1.29		EAST INCORPORATED LIMITS LEWISTON	1,255	1,270	1,220
	16.63	17.24	0.61		WEST INCORPORATED LIMITS RICHMOND - SR 91	1,475	1,490	1,430
A00143	**0.00**	**0.30**	**0.30**	*	**JUNCTION FAI 15**	**2,980**	**2,850**	**3,290**
	0.30	2.62	2.32		WEST INCORPORATED LIMITS PAROWAN	4,255	4,080	4,700
	2.62	4.01	1.39		JUNCTION SR 274 IN PAROWAN	2,545	2,440	2,810
	4.01	13.40	9.39		SOUTH INCORPORATED LIMITS PAROWAN	1,700	1,630	1,880
	13.40	16.16	2.76		NORTH INCORPORATED LIMITS BRIANHEAD	1,700	1,630	1,880
	16.16	18.15	1.99		SOUTH INCORPORATED LIMITS BRIANHEAD	1,700	1,630	1,880
	18.15	19.05	0.90		NORTH ENTRANCE CEDAR BREAKS	1,700	1,630	1,880
	19.05	19.44	0.39		JUNCTION CEDAR BREAKS PARK ROAD	875	890	850
	19.44	27.48	8.04		EAST ENTRANCE CEDAR BREAKS	875	890	850
	27.48	32.15	4.67		IRON - GARFIELD COUNTY LINE	875	890	850
	32.15	50.20	18.05		PANGUITCH LAKE	785	790	760
	50.20	50.79	0.59		SOUTH INCORPORATED LIMITS PANGUITCH - SR 89	1,120	1,130	1,090
A00144	**0.00**	**2.37**	**2.37**	*	**JCT. SR 92 AMERICAN FORK CANYON - TIBBLE FORK RESEVIOR**	**210**	**230**	**170**
A00145	**0.00**	**0.49**	**0.49**	*	**JCT. FAI 15- SR 89 WEST INC. LIMITS AMERICAN FORK VIA MAIN**	**9,645**	**10,390**	**7,780**
A00146	**0.00**	**0.22**	**0.22**	*	**JUNCTION SR 89**	**9,175**	**9,890**	**7,400**
	0.22	0.76	0.54		200 SOUTH VIA 100 EAST	11,935	12,860	9,620
	0.76	2.42	1.66		500 NORTH VIA 100 EAST PLEASANT GROVE	5,850	6,300	4,720
	2.42	5.03	2.61		NORTH INCORPORATED LIMITS PLEASANT GROVE	4,460	4,810	3,600
	5.03	5.28	0.25		SOUTH INCORPORATED LIMITS HIGHLAND - JUNCTION SR 92	4,460	2,470	1,850
A00147	**0.00**	**1.86**	**1.86**	*	**JUNCTION SR 6**	**2,295**	**2,470**	**1,850**
	1.86	2.32	0.46		WEST INCORPORATED LIMITS PAYSON	2,070	2,020	2,200
	2.32	2.91	0.59		WEST URBAN BOUNDARY PAYSON	2,180	2,210	2,110
	2.91	6.95	4.04		5600 WEST SR 141 PAYSON	1,220	1,230	1,180

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00147	6.95	9.86	2.91		7300 SOUTH VIA 5600 WEST	1,315	1,330	1,280
	9.86	11.00	1.14		3200 WEST SR 115 VIA 7300 SOUTH	1,470	1,490	1,430
	11.00	13.97	2.97		6400 SOUTH SR 77 VIA 3200 WEST	1,375	1,340	1,460
	13.97	14.28	0.31		WEST URBAN BOUNDARY	1,210	1,220	1,170
	14.28	14.48	0.20		JUNCTION FAI 15	1,580	1,700	1,270
	14.48	15.02	0.54		WEST INCORPORATED LIMITS SPANISH FORK	1,580	3,120	2,340
	15.02	16.05	1.03		JUNCTION SR 156 MAIN STREET IN SPANISH FORK	2,900	3,120	2,340
	16.05	17.97	1.92		JUNCTION SR 214 EAST INCORPORATED LIMITS SPANISH FORK	2,300	2,480	1,850
	17.97	18.06	0.09		WEST INCORPORATED LIMITS MAPLETON	2,300	2,480	1,850
	18.06	19.07	1.01		JUNCTION SR 89	1,200	1,290	970
	19.07	20.08	1.01		MAIN STREET VIA MAPLETON ROAD	1,135	1,220	920
	20.08	21.08	1.00		JUNCTION LOCAL ROAD CENTER OF MAPLETON - SR 89	2,555	2,490	2,710
A00148	**0.00**	**2.52**	**2.52**	*	**JCT. SR 14 - S. CEDAR BREAKS NAT. MONUMENT BOUNDARY**	**625**	**600**	**690**
A00149	**0.00**	**4.22**	**4.22**	*	**JCT. SR 40 IN JENSEN - DINOSAUR NATIONAL MONUMENT**	**2,025**	**2,050**	**1,960**
A00150	**0.00**	**1.06**	**1.06**	*	**JUNCTION SR 32**	**1,910**	**1,930**	**1,850**
	1.06	4.87	3.81		EAST INCORPORATED LIMITS KAMAS	1,000	1,010	970
	4.87	29.25	24.38		WASATCH NATIONAL FOREST BOUNDARY	1,015	1,030	980
	29.25	34.12	4.87		SUMMIT- SUMMIT COUNTY LINE	580	590	560
	34.12	54.54	20.42		DUCHESNE-SUMMIT COUNTY LINE- UTAH-WYOMING STATE LINE	440	450	430
A00151	**0.00**	**0.50**	**0.50**	*	**JUNCTION REDWOOD ROAD VIA 10400 SOUTH**	**19,865**	**21,400**	**16,020**
	0.50	2.24	1.74		JUNCTION 1300 WEST - FAI 15 VIA 10600 SOUTH	24,715	26,630	19,930
A00152	**0.00**	**0.72**	**0.72**	*	**JUNCTION 900 EAST**	**17,750**	**18,970**	**14,700**
	0.72	1.45	0.73		1300 EAST VIA VAN WINKLE EXPRESSWAY	17,020	18,190	14,100
	1.45	2.27	0.82		5600 SOUTH	23,055	24,640	19,090
	2.27	2.42	0.15		6100 SOUTH 1 WAY SOUTHBOUND HIGHLAND DRIVE	19,755	21,110	16,360
	2.42	2.52	0.10		HIGHLAND DRIVE NORTHBOUND (1 WAY TRAVEL ONLY)	31,785	33,970	26,320
	2.52	3.02	0.50		6200 SOUTH STREET - FAI 215 EASTBOUND ON & OFF RAMPS	43,025	45,980	35,630
A00153	**0.00**	**1.11**	**1.11**	*	**JUNCTION SR 160 IN BEAVER**	**4,000**	**4,050**	**3,880**
	1.11	4.53	3.42		EAST INCORPORATED LIMITS BEAVER	1,990	2,010	1,930

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00153	4.53	26.86	22.33		FISHLAKE NATIONAL FOREST BOUNDARY	45	50	40
	26.86	37.85	10.99		BEAVER - PIUTE COUNTY LINE	110	110	110
	37.85	40.47	2.62		WEST INCORPORATED LIMITS JUNCTION - SR 89	160	160	160
A00154	**0.00**	**10.10**	**10.10**	*	**PROPOSED JUNCTION FAI 15**	**NA**	NA	**NA**
	10.10	11.59	1.49		BEGIN CONSTRUCTION 9000 SOUTH	14,250	16,050	9,760
	11.59	12.59	1.00		JUNCTION 7800 SOUTH (SR 48)	22,665	25,520	15,520
	12.59	13.60	1.01		7000 SOUTH VIA BANGERTER HIGHWAY	28,300	31,870	19,380
	13.60	14.63	1.03		6200 SOUTH	29,960	33,740	20,520
	14.63	15.63	1.00		5400 SOUTH (SR 173)	30,500	34,340	20,890
	15.63	16.64	1.01		JUNCTION 4700 SOUTH VIA BANGERTER HIGHWAY	39,425	44,390	27,000
	16.64	17.64	1.00		JUNCTION 4100 SOUTH STREET	40,375	45,460	27,650
	17.64	18.15	0.51		JUNCTION 3500 SOUTH (SR 171)	46,695	52,580	31,980
	18.15	18.69	0.54		JUNCTION 3100 SOUTH	46,695	52,580	31,980
	18.69	19.48	0.79		JUNCTION 2700 SOUTH VIA BANGERTER HIGHWAY	39,715	44,720	27,200
	19.48	19.53	0.05		URBAN BOUNDARY	39,715	44,720	27,200
	19.53	19.73	0.20		SOUTH FRONTAGE ROAD 2400 SOUTH	39,715	4,720	27,200
	19.73	20.08	0.35		JUNCTION 2100 SOUTH INTERCHANGE	34,000	38,290	23,290
	20.08	21.93	1.85		JUNCTION 1820 SOUTH VIA 4000 WEST	34,000	38,290	23,290
	21.93	23.05	1.12		FAI 80 EASTBOUND OFF RAMP - WESTBOUND OFF RAMP	13,715	15,440	9,390
A00155	**0.00**	**3.65**	**3.65**	*	**JUNCTION SR 10**	**1,180**	**1,190**	**1,140**
	3.65	4.95	1.30		WEST INCORPORATED LIMITS CLEVELAND	1,270	1,290	1,230
	4.95	8.41	3.46		NORTH INC. LIMITS CLEVELAND (JUNCTION LOCAL ROAD)	1,330	1,430	1,070
	8.41	10.73	2.32		JUNCTION LOCAL ROAD EAST OF ELMO - SR 10	940	950	910
A00156	**0.00**	**0.17**	**0.17**	*	**JUNCTION SR 6**	**22,520**	**24,270**	**18,160**
	0.17	0.63	0.46		JUNCTION SR 115 VIA MAIN STREET SPANISH FORK	23,150	24,940	18,660
	0.63	0.98	0.35		400 NORTH SR 147 VIA MAIN STREET	29,295	31,570	23,620
	0.98	1.38	0.40		800 NORTH STREET - FAI 15 IN SPANISH FORK	22,925	24,700	18,480
A00157	**0.00**	**0.40**	**0.40**	*	**JUNCTION SR 244**	**2,150**	**2,180**	**2,090**
	0.40	1.25	0.85		SOUTH INCORPORATED LIMITS HELPER	2,150	2,180	2,090

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00157	1.25	5.02	3.77		JUNCTION SR 139 - KENILWORTH	555	560	540
A00158	**0.00**	**3.77**	**3.77**	*	**JUNCTION SR 39**	**2,420**	**2,450**	**2,350**
	3.77	4.33	0.56		JUNCTION LOCAL ROAD WEST OF EDEN	1,705	1,730	1,650
	4.33	4.98	0.65		JUNCTION LOCAL ROAD NORTHWEST OF EDEN	1,145	1,160	1,110
	4.98	11.67	6.69		PATIO SPRINGS - POWDER MOUNTAIN SKI RESORT	1,235	1,250	1,200
A00159	**0.00**	**8.01**	**8.01**	*	**JUNCTION SR 21 GARRISON - SR 6**	**100**	**110**	**80**
A00160	**0.00**	**1.35**	**1.35**	*	**JUNCTION FAI 15**	**2,810**	**2,690**	**3,110**
	1.35	2.02	0.67		SOUTH INCORPORATED LIMITS BEAVER	6,900	6,610	7,630
	2.02	2.21	0.19		JUNCTION SR 21 IN BEAVER	7,205	6,900	7,960
	2.21	3.02	0.81		JUNCTION SR 153 IN BEAVER	3,950	3,780	4,370
	3.02	3.62	0.60		JUNCTION LOCAL ROAD TO MANDERFIELD	2,900	2,780	3,200
	3.62	3.83	0.21		NORTH INCORPORATED LIMITS BEAVER - JUNCTION FAI 15	2,900	2,780	3,200
A00161	**0.00**	**1.08**	**1.08**	*	**JUNCTION FAI 70**	**145**	**150**	**140**
	1.08	3.09	2.01		COVE FORT - FAI 15 NORTH COVE FORT INTERCHANGE	90	90	90
A00163	**0.00**	**19.35**	**19.35**	*	**ARIZONA - UTAH STATE LINE**	**1,695**	**1,720**	**1,640**
	19.35	21.54	2.19		JUNCTION LOCAL ROAD SOUTH OF MEXICAN HAT	2,115	2,140	2,050
	21.54	24.98	3.44		MEXICAN HAT	825	830	800
	24.98	41.60	16.62		JUNCTION SR 261	825	830	800
	41.61	43.37	1.77		JUNCTION SR 191 AT BLUFF	555	560	540
	43.37	54.51	11.14		ST. CHRISTOPHERS MISSION	555	560	540
	54.51	56.21	1.70		JUNCTION LOCAL ROAD - SR 262	850	860	820
A00164	**0.00**	**1.55**	**1.55**	*	**JUNCTION FAI 15**	**2,460**	**2,490**	**2,390**
	1.55	1.66	0.11		SOUTH URBAN BOUNDARY	2,460	2,400	2,610
	1.66	2.73	1.07		JUNCTION LOCAL ROAD VIA 800 SOUTH - SR 6	3,050	2,980	3,230
A00165	**0.00**	**1.01**	**1.01**	*	**CENTER OF PARADISE AT 9100 SOUTH**	**2,245**	**2,270**	**2,180**
	1.01	4.37	3.36		NORTH INCORPORATED LIMITS PARADISE	2,130	2,160	2,070
	4.37	4.98	0.61		SOUTH INCORPORATED LIMITS HYRUM	2,610	2,640	2,530
	4.98	5.70	0.72		JUNCTION SR 101 IN HYRUM	6,310	6,390	6,120
	5.70	6.50	0.80		NORTH INCORPORATED LIMITS HYRUM	7,625	7,720	7,400

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00165	6.50	7.52	1.02		SOUTH INCORPORATED LIMITS NIBLEY	9,300	9,410	9,020
	7.52	7.90	0.38		LOGAN URBAN BOUNDARY	9,300	9,070	9,860
	7.90	8.69	0.79		JUNCTION SR 238 IN NIBLEY	10,995	11,850	8,860
	8.69	9.70	1.01		NORTH INCORPORATED LIMITS NIBLEY	7,635	8,230	6,160
	9.70	10.22	0.52		SOUTH INCORPORATED LIMITS PROVIDENCE	7,635	8,230	6,160
	10.22	10.40	0.18		NORTH INCORPORATED LIMITS PROVIDENCE	7,635	8,230	6,160
	10.40	10.73	0.33		LOGAN SOUTH INCORPORATED LIMITS - SR 91 LOGAN	10,835	11,670	8,740
A00167	**0.00**	**1.54**	**1.54**	*	**JUNCTION FAI 84**	**3,240**	**3,280**	**3,140**
	1.54	6.91	5.37		JUNCTION LOCAL ROAD	2,655	2,690	2,580
	6.91	11.07	4.16		MORGAN - WEBER COUNTY LINE - SR 39 NEAR HUNTSVILLE	2,655	2,690	2,580
A00168	**0.00**	**1.16**	**1.16**	*	**NORTH ENTRANCE HILL AIR FORCE BASE - JUNCTION SR 60**	**10,410**	**10,160**	**11,040**
A00171	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 111 IN MAGNA**	**12,745**	**13,170**	**11,680**
	1.50	3.50	2.00		7200 WEST WEST INCORPORATED LIMITS WEST VALLEY	18,895	19,530	17,320
	3.50	4.50	1.00		5600 WEST	20,400	21,800	16,900
	4.50	5.50	1.00		4800 WEST STREET VIA 3500 SOUTH	25,205	26,940	20,870
	5.50	5.80	0.30		4000 WEST STREET	39,860	42,600	33,010
	5.80	6.00	0.20		BANGERTER HIGHWAY	40,990	43,810	33,950
	6.00	6.50	0.50		3600 WEST STREET VIA 3500 SOUTH	34,300	36,660	28,410
	6.50	7.00	0.50		3200 WEST	38,740	41,400	32,080
	7.00	7.32	0.32		2700 WEST STREET VIA 3500 SOUTH STREET	46,060	49,230	38,150
	7.32	8.01	0.69		JUNCTION FAI 215	44,750	47,830	37,060
	8.01	8.80	0.79		REDWOOD ROAD VIA 3500 SOUTH	41,625	46,930	28,370
	8.80	9.20	0.40		JORDAN RIVER BRIDGE EAST INC. LIMITS WEST VALLEY	41,625	46,930	28,370
	9.20	9.99	0.79		900 WEST STREET FAU 1013	35,520	40,040	24,210
	9.99	10.11	0.12		JUNCTION FAI 15 VIA 3500 SOUTH	42,170	45,070	34,930
	10.11	10.69	0.58		300 WEST FAU 1017	43,245	46,220	35,820
	10.69	11.30	0.61		STATE STREET VIA 3300 SOUTH	32,180	34,390	26,650
	11.30	11.60	0.30		500 EAST	25,155	26,880	20,830
	11.60	11.90	0.30		700 EAST SR 71 VIA 3300 SOUTH	21,090	22,540	17,470

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00171	11.90	12.50	0.60		900 EAST STREET	20,650	22,070	17,100
	12.50	12.68	0.18		1300 EAST STREET	16,490	17,620	13,660
	12.68	13.55	0.87		HIGHLAND DRIVE	16,245	17,360	13,450
	13.55	14.05	0.50		2000 EAST STREET	16,435	17,560	13,610
	14.05	14.55	0.50		2300 EAST STREET	17,075	18,250	14,140
	14.55	15.62	1.07		2700 EAST STREET - FAI 215	20,550	21,960	17,020
A00172	**0.00**	**0.99**	**0.99**	*	**6200 SOUTH VIA 5600 WEST**	**8,715**	**9,310**	**7,220**
	0.99	1.99	1.00		5400 SOUTH	12,620	13,490	10,450
	1.99	2.99	1.00		4700 SOUTH	15,900	16,990	13,170
	2.99	3.99	1.00		4100 SOUTH	16,500	17,630	13,670
	3.99	6.00	2.01		3500 SOUTH VIA 5600 WEST	17,180	18,360	14,230
	6.00	6.99	0.99		2100 SOUTH	14,000	13,830	14,420
	6.99	9.20	2.21		1300 SOUTH - FAI 80	14,000	13,830	14,420
A00173	**0.00**	**2.13**	**2.13**	*	**JUNCTION SR 111 NEAR BACCHUS**	**11,230**	**12,100**	**9,050**
	2.13	2.62	0.49		EAST INCORPORATED LIMITS WEST VALLEY CITY	11,230	12,100	9,650
	2.62	4.59	1.97		5600 WEST VIA 5400 SOUTH	26,610	28,670	21,450
	4.59	4.89	0.30		4000 WEST STREET	31,810	34,280	25,650
	4.89	6.11	1.22		BANGERTER HIGHWAY	34,900	37,610	28,140
	6.11	7.11	1.00		2700 WEST VIA 5600 SOUTH STREET	37,900	40,840	30,560
	7.11	7.92	0.81		REDWOOD ROAD SR 68	25,615	28,880	17,460
	7.92	8.61	0.69		MURRAY WEST INCORPORATED LIMITS	25,615	28,880	17,460
	8.61	9.08	0.47		700 WEST FAU 1015 IN MURRAY	28,515	32,150	19,440
	9.08	9.77	0.69		JUNCTION FAI 15 - STATE STREET SR 89	24,850	28,010	16,940
A00174	**0.00**	**8.15**	**8.15**	*	**INTERMOUNTAIN POWER PLANT MAIN ENTRANCE - JCT. SR 6**	**1,015**	**1,030**	**980**
A00180	**0.00**	**0.49**	**0.49**	*	**JUNCTION FAI 15**	**18,750**	**20,200**	**15,120**
	0.49	1.00	0.51		SOUTH INC. LIMITS AMERICAN FORK - SR 89 VIA 500 EAST	18,750	20,200	15,120
A00181	**0.00**	**0.45**	**0.45**	*	**JUNCTION VAN WINKLE EXPRESSWAY**	**17,305**	**18,650**	**13,950**
	0.45	1.04	0.59		4800 SOUTH STREET	15,530	16,730	12,520
	1.04	1.92	0.88		4500 SOUTH VIA 1300 EAST STREET	15,530	16,730	12,520

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00181	1.92	2.80	0.88		3900 SOUTH	15,950	17,190	12,860
	2.80	3.26	0.46		3300 SOUTH VIA 1300 EAST STREET	18,660	20,110	15,040
	3.26	3.56	0.30		SOUTH INCORPORATED LIMITS SALT LAKE	18,660	20,110	15,040
	3.56	3.73	0.17		JUNCTION HIGHLAND DRIVE	32,590	35,120	26,270
	3.73	4.21	0.48		2700 SOUTH VIA 1300 EAST STREET	27,980	30,150	22,560
	4.21	4.60	0.39		JUNCTION FAI 80	42,550	45,850	34,300
	4.60	5.16	0.56		2100 SOUTH VIA 1300 EAST & SOUTH INC. LIMITS SALT LAKE CITY	21,355	23,010	17,220
	5.16	5.72	0.56		1700 SOUTH	19,885	21,430	16,030
	5.72	6.43	0.71		1300 SOUTH VIA 1300 EAST STREET	19,440	20,950	15,670
	6.43	6.87	0.44		800 SOUTH - 500 SOUTH VIA 1300 EAST	17,950	19,340	14,470
A00184	**0.00**	**0.14**	**0.14**	*	**NORTH TEMPLE**	**14,580**	**15,710**	**11,750**
	0.14	0.45	0.31		200 NORTH STREET VIA STATE STREET	13,235	14,260	10,670
	0.45	0.72	0.27		MAIN STREET VIA 200 NORTH SALT LAKE CITY	19,930	21,470	16,070
	0.72	1.93	1.21		500 NORTH VIA COLUMBUS - SR 89 VIA VICTORY	16,730	18,030	13,490
A00186	**0.00**	**1.18**	**1.18**	*	**BEGIN SR 186 AT JUNCTION FAI 80**	**23,045**	**22,080**	**2 5470**
	1.18	1.49	0.31		2400 WEST STREET	23,045	24,830	18,580
	1.49	1.71	0.22		2200 WEST STREET	33,300	35,880	26,850
	1.71	2.23	0.52		JUNCTION FAI 215 VIA NORTH TEMPLE	33,300	35,880	26,850
	2.23	3.41	1.18		REDWOOD ROAD VIA NORTH TEMPLE	25,090	27,750	18,450
	3.41	4.30	0.89		900 WEST STREET	28,980	31,230	23,360
	4.30	5.04	0.74		300 WEST STREET VIA NORTH TEMPLE IN SALT LAKE CITY	29,585	31,880	23,850
	5.04	5.50	0.46		400 SOUTH STREET VIA 300 WEST	20,320	21,900	16,380
	5.50	5.65	0.15		MAIN STREET VIA 400 SOUTH STREET	25,770	27,770	20,780
	5.65	6.55	0.90		STATE STREET	28,550	30,760	23,020
	6.55	6.85	0.30		700 EAST VIA 400 SOUTH STREET	33,025	35,290	27,350
	6.85	7.55	0.70		900 EAST VIA 400 SOUTH STREET	37,060	39,610	30,690
	7.55	8.00	0.45		1300 EAST STREET	42,635	45,560	35,310
	8.00	8.50	0.50		GUARDSMAN WAY VIA 500 SOUTH	32,725	34,970	27,100
	8.50	9.03	0.53		WASATCH BOULEVARD	35,550	37,990	29,440

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00186	9.03	9.36	0.33		SUNNYSIDE AVENUE	46,475	52,590	31,180
	9.36	9.70	0.34		2100 EAST STREET VIA FOOTHILL BOULEVARD	45,810	48,960	37,940
	9.70	9.93	0.23		FOOTHILL VILLAGE	45,465	48,590	37,650
	9.93	12.40	2.47		2300 EAST ST - FAI 215	39,590	42,310	32,790
A00189	**0.00**	**1.49**	**1.49**	*	**JUNCTION FAI 15**	**28,700**	**32,070**	**20,270**
	1.49	1.67	0.18		500 SOUTH	38,760	43,320	27,370
	1.67	1.95	0.28		300 SOUTH SR 89 IN PROVO	34,670	37,050	28,710
	1.95	2.41	0.46		CENTER STREET VIA UNIVERSITY AVENUE	44,175	47,210	36,590
	2.41	2.69	0.28		500 NORTH VIA UNIVERSITY AVENUE	44,645	47,710	36,590
	2.69	2.95	0.26		800 NORTH FAU 3030 VIA UNIVERSITY AVENUE	39,820	42,560	32,980
	2.95	3.11	0.16		JUNCTION CANYON ROAD FAU 3051	39,390	42,100	32,620
	3.11	3.48	0.37		1230 NORTH FAU 3032 VIA UNIVERSITY AVENUE	35,400	37,830	29,320
	3.48	4.77	1.29		UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265	34,440	36,810	28,520
	4.77	5.36	0.59		NORTH INCORPORATED LIMITS PROVO	33,520	35,820	27,760
	5.36	5.81	0.45		3700 NORTH PROVO	30,155	32,230	24,970
	5.81	6.04	0.23		NORTH INCORPORATED LIMITS PROVO	15,300	16,350	12,670
	6.04	7.48	1.44		SOUTH INCORPORATED LIMITS PROVO	15,300	16,350	12,670
	7.48	7.72	0.24		JUNCTION SR 52 OLMSTEAD JUNCTION	10,155	9,410	12,010
	7.72	9.19	1.47		NORTH INC. LIMITS PROVO & SOUTHEAST INC. LIMITS OREM	10,155	9,410	12,010
	9.19	11.17	1.98		EAST INCORPORATED LIMITS OREM & URBAN BOUNDARY	10,155	9,410	12,010
	11.17	14.30	3.13		BRIDAL VEIL FALLS	9,135	8,470	10,810
	14.30	14.57	0.27		JUNCTION SR 92	7,335	7,250	7,550
	14.57	21.05	6.48		UTAH - WASATCH COUNTY LINE	6,490	6,410	6,680
	21.05	24.93	3.88		JUNCTION LOCAL ROAD TO WALLSBURG	7,095	7,010	7,310
	24.93	25.17	0.24		SOUTHWEST INCORPORATED LIMITS CHARLESTON	7,095	7,010	7,310
	25.17	26.19	1.02		JUNCTION SR 113 IN CHARLESTON	5,545	5,480	5,710
	26.19	29.20	3.01		EAST INCORPORATED LIMITS CHARLESTON - JUNCTION SR 40	7,060	6,980	7,270
A00190	**0.00**	**1.83**	**1.83**	*	**JUNCTION FAI 215 AT KNUDSENS CORNER**	**26,310**	**28,120**	**21,790**
	1.83	2.46	0.63		JUNCTION SR 210	4,560	4,910	3,680

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00190	2.46	4.92	2.46		SALT LAKE EAST URBAN BOUNDARY	4,350	3,610	6,190
	4.92	16.84	11.92		MULE HOLLOW INN	4,940	4,100	7,030
	16.84	19.93	3.09		BRIGHTON - SALT LAKE - WASATCH COUNTY LINE	205	220	170
A00191	**0.00**	**21.33**	**21.33**	*	**ARIZONA - UTAH STATE LINE**	**1,000**	**990**	**1,030**
	21.33	24.76	3.43		JUNCTION SR 163	1,845	1,850	1,830
	24.76	36.61	11.85		BLUFF	1,610	1,610	1,600
	36.61	47.47	10.86		JUNCTION SR 262 TO ANETH	2,605	2,610	2,590
	47.47	50.13	2.66		JUNCTION SR 95 SOUTH OF BLANDING	3,620	3,630	3,600
	50.13	51.90	1.77		SOUTH INCORPORATED LIMITS BLANDING	5,640	5,650	5,610
	51.90	65.64	13.74		EAST INCORPORATED LIMITS BLANDING	2,400	2,410	2,390
	65.64	70.97	5.33		VERDURE	2,350	2,360	2,340
	70.97	72.14	1.17		SOUTH INCORPORATED LIMITS MONTICELLO	4,085	4,090	4,060
	72.14	73.26	1.12		JUNCTION SR 666 IN MONTICELLO	3,385	3,370	3,430
	73.26	103.91	30.65		NORTH INCORPORATED LIMITS MONTICELLO	3,385	3,370	3,430
	103.91	119.44	15.53		JUNCTION SR 46 LA SAL JUNCTION	3,190	3,170	3,230
	119.44	125.26	5.82		SAN JUAN - GRAND COUNTY LINE	8,780	8,740	8,890
	125.26	127.43	2.17		SOUTH INCORPORATED LIMITS MOAB	15,965	15,270	17,710
	127.43	128.62	1.19		NORTH INCORPORATED LIMITS MOAB	5,530	5,290	6,140
	128.62	131.27	2.65		JUNCTION SR 128 COLORADO RIVER	4,990	4,770	5,540
	131.27	137.22	5.95		JUNCTION ARCHES NATIONAL MONUMENT ROAD	2,570	2,460	2,850
	137.22	157.71	20.49		JUNCTION SR 313 - JUNCTION FAI 70 CRESCENT JUNCTION	2,570	2,460	2,850
	157.72	158.03	0.32	*	JUNCTION SR 6 NORTH OF HELPER	2,475	2,370	2,740
	158.03	166.53	8.50		ROAD TO POWER PLANT	370	350	410
	166.53	172.98	6.45		CARBON - DUCHESNE COUNTY LINE	370	350	410
	172.98	200.59	27.61		UINTAH NATIONAL FOREST BOUNDARY	370	350	410
	200.59	201.45	0.86		SOUTH INCORPORATED LIMITS DUCHESNE - SR 40 IN DUCHESNE	665	640	730
	201.46	202.50	1.05	*	JUNCTION SR 40 IN VERNAL	3,355	3,590	2,780
	202.50	202.80	0.30		NORTH INCORPORATED LIMITS VERNAL	4,195	4,520	3,380
	202.80	207.03	4.23		NORTH URBAN BOUNDARY VERNAL	1,590	1,520	1,770

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00191	207.03	218.59	11.56		JUNCTION SR 301 ROAD TO STEINAKER	1,455	1,390	1,620
	218.59	227.08	8.49		ASHLEY NATIONAL FOREST BOUNDARY	1,010	970	1,120
	227.08	236.20	9.12		UINTAH - DAGGETT COUNTY LINE	1,010	970	1,120
	236.20	242.36	6.16		JUNCTION SR 44 GREENDALE JUNCTION	1,010	970	1,120
	242.36	244.91	2.55		FLAMING GORGE DAM	320	310	350
	244.91	249.25	4.34		DUTCH JOHN	320	310	350
	249.25	253.09	3.84		ASHLEY NATIONAL FOREST BNDRY - UT-WY STATE LINE	320	310	350
A00193	**0.00**	**0.58**	**0.58**	*	**JUNCTION SR 126**	**22,690**	**24,450**	**18,290**
	0.58	1.18	0.60		JUNCTION FAI 15 CLEARFIELD	19,060	20,540	15,370
	1.18	2.17	0.99		EAST INC. LIMITS CLEARFIELD & NORTH INC. LIMITS LAYTON	18,115	19,520	14,600
	2.17	5.58	3.41		HILLFIELD ROAD SR 232 - SR 89	18,660	20,110	15,040
A00195	**0.00**	**0.88**	**0.88**	*	**4500 SOUTH**	**13,990**	**15,070**	**11,280**
	0.88	1.76	0.88		3900 SOUTH VIA 2300 EAST	17,585	18,950	14,180
	1.76	2.56	0.80		3300 SOUTH - FAI 80 (2300 EAST INTERCHANGE)	17,200	18,530	13,870
A00197	**0.00**	**1.08**	**1.08**	*	**JUNCTION SR 73 MAIN STREET LEHI - SR 89 VIA 500 WEST**	**2,360**	**2,540**	**1,900**
A00198	**0.00**	**2.90**	**2.90**	*	**JUNCTION FAI 15 SANTAQUIN**	**6,425**	6,500	**6,230**
	2.90	3.70	0.80		SOUTH URBAN BOUNDARY	5,000	5,390	4,030
	3.70	5.40	1.70		SOUTH INCORPORATED LIMITS PAYSON	5,000	5,390	4,030
	5.40	6.18	0.78		JUNCTION SR 115 IN PAYSON	6,550	7,060	5,280
	6.18	7.37	1.19		EAST INCORPORATED LIMITS PAYSON	6,865	6,950	6,660
	7.37	7.89	0.52		EAST URBAN BOUNDARY	6,865	6,950	6,660
	7.89	9.12	1.23		WEST INCORPORATED LIMITS SALEM	6,865	7,400	5,580 q
	9.12	10.45	1.33		NORTH INCORPORATED LIMITS SALEM	8,485	8,590	8,230
	10.45	11.55	1.10		SOUTH URBAN BOUNDARY	15,560	16,770	12,540
	11.55	12.36	0.81		SOUTH INCORPORATED LIMITS SPANISH FORK	16,600	17,890	13,380
	12.36	13.73	1.37		300 SOUTH IN SPANISH FORK	6,435	6,930	5,190
	13.73	15.77	2.04		EAST INCORPORATED LIMITS SPANISH FORK - JUNCTION SR 6	1,820	1,960	1,470
A00199	**0.00**	**8.14**	**8.14**	*	**DUGWAY PROVING GROUNDS EAST GATE**	**675**	**680**	**650**
	8.14	17.40	9.26		TERRA	850	860	820

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00199	17.40	21.46	4.06		JUNCTION LOCAL ROAD	890	900	860
	21.46	22.16	0.70		LOCAL ROAD - JUNCTION SR 36	1,355	1,370	1,310
A00200	**0.00**	**1.56**	**1.56**	*	**JUNCTION SR 61 IN LEWISTON - UTAH - IDAHO STATE LINE**	**1,800**	**1,820**	**1,750**
A00201	**0.00**	**0.43**	**0.43**	*	**JUNCTION FAI 80**	**10,065**	**9,940**	**10,370**
	0.43	1.87	1.44		TOOELE - SALT LAKE COUNTY LINE	10,065	9,940	10,370
	1.87	3.62	1.75		SMELTER OPERATION	10,065	9,940	10,370
	3.62	6.09	2.47		JUNCTION SR 202 GARFIELD	11,790	11,650	12,140
	6.09	7.56	1.47		SALT LAKE URBAN BOUNDARY VIA 2100 SOUTH STREET	11,790	11,650	12,140
	7.56	9.07	1.51		JUNCTION SR 111 8400 WEST IN MAGNA	16,330	19,090	9,440
	9.07	11.19	2.12		WEST INCORPORATED LIMITS WEST VALLEY CITY - 7200 WEST	25,800	25,490	26,570
	11.19	13.21	2.02		JUNCTION SR 172 5600 WEST INTERCHANGE	38,835	38,370	40,000
	13.21	14.18	0.97		4000 WEST INTERCHANGE (BANGERTER HIGHWAY)	55,000	54,340	56,650
	14.18	15.06	0.88		3200 WEST INTERCHANGE	70,555	69,710	72,670
	15.06	15.72	0.66		JUNCTION FAI 215	71,565	83,650	41,350
	15.72	16.49	0.77		JUNCTION REDWOOD ROAD SR 68	72,615	84,880	41,960
	16.49	16.86	0.37		JORDAN RIVER BRIDGE E. BNDRY WEST VALLEY W. BNDRY S. S. L.	72,615	84,880	41,960
	16.86	17.32	0.46		JUNCTION 900 WEST	82,435	96,360	47,630
	17.32	17.53	0.21		EAST INC. LIMITS SOUTH SALT LAKE & W. INC. LIMITS SALT LAKE	82,435	96,360	47,630
	17.53	17.78	0.25		JUNCTION FAI 15 IN SALT LAKE CITY VIA 2100 SOUTH STREET	56,446	60,820	45,510
	17.78	18.37	0.59		300 WEST STREET - STATE STREET	35,730	38,500	28,810
A00202	**0.00**	**1.89**	**1.89**	*	**JUNCTION SR 201 - FAI 80 GARFIELD CUT OFF**	**1,365**	**1,380**	**1,320**
A00203	**0.00**	**1.13**	**1.13**	*	**JUNCTION SR 89**	**22,010**	**23,520**	**18,230**
	1.13	2.27	1.14		NORTH INC. LIMITS SOUTH OGDEN & SOUTH INC. LIMITS OGDEN	32,000	34,200	26,500
	2.27	3.05	0.78		COUNTRY HILL DRIVE VIA HARRISON BOULEVARD	33,260	35,550	27,550
	3.05	3.90	0.85		36TH STREET VIA HARRISON BOULEVARD	37,765	40,360	31,280
	3.90	4.76	0.86		30TH STREET VIA HARRISON BOULEVARD	38,885	41,560	32,200
	4.76	5.34	0.58		24TH STREET VIA HARRISON BOULEVARD	29,905	31,960	24,770
	5.34	6.10	0.76		20TH STREET VIA HARRISON BOULEVARD - 12TH STREET	30,385	32,470	25,160
A00204	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 26 RIVERDALE ROAD**	**25,865**	**27,870**	**20,850**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00204	0.20	1.07	0.87		SOUTH INCORPORATED LIMITS OGDEN	29,565	31,860	23,840
	1.07	2.08	1.01		31ST STREET IN OGDEN VIA WALL AVENUE	31,630	34,080	25,500
	2.08	2.66	0.58		24TH STREET IN OGDEN	31,630	34,080	25,500
	2.66	3.55	0.89		20TH STREET IN OGDEN	28,320	30,520	22,830
	3.55	4.58	1.03		JUNCTION SR 39 12TH STREET IN OGDEN	22,755	24,520	18,350
	4.58	5.10	0.52		2ND STREET VIA WALL AVENUE IN OGDEN	19,065	20,540	15,370
	5.10	5.39	0.29		NORTH INC. LIMITS OGDEN & S. INC. LIMITS HARRISVILLE - SR 89	19,065	20,540	15,370
A00208	**0.00**	**10.18**	**10.18**	*	**JUNCTION SR 40 - SR 35 TABIONA**	**220**	**220**	**210**
A00209	**0.00**	**5.35**	**5.35**	*	**JUNCTION SR 48 PROPOSED SR 209**	**NA**	0	**0**
	5.35	6.70	1.35		JUNCTION SR 68 BEGIN CONSTRUCTED PORTION	27,225	29,100	22,550
	6.70	7.36	0.66		WEST INCORPORATED LIMITS SANDY	25,785	27,560	21,360
	7.36	7.85	0.49		JUNCTION FAI 15 VIA 9000 SOUTH	33,835	36,160	28,020
	7.85	8.84	0.99		JUNCTION STATE STREET	23,005	24,590	19,050
	8.84	9.64	0.80		700 EAST VIA 9000 SOUTH	12,430	13,280	10,290
	9.64	10.08	0.44		9400 SOUTH VIA BYPASS	36,550	39,060	30,270
	10.08	11.09	1.01		1300 EAST VIA 9400 SOUTH	26,440	28,260	21,900
	11.09	11.91	0.82		2000 EAST FAU 1049	17,715	18,930	14,670
	11.91	12.68	0.77		EAST INCORPORATED LIMITS SANDY	19,585	20,930	16,220
	12.68	13.23	0.55		GRANITE 3100 EAST	8,540	9,130	7,070
	13.23	14.46	1.23		WASATCH BOULEVARD - SR 210	3,105	3,320	2,570
A00210	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 190 7000 SOUTH**	**20,775**	**22,200**	**17,210**
	0.73	3.15	2.42		7800 SOUTH VIA WASATCH BOULEVARD	16,375	17,500	13,560
	3.15	3.86	0.71		NATIONAL FOREST BOUNDARY	6,645	6,000	8,260
	3.86	12.09	8.23		JUNCTION SR 209 9400 SOUTH STREET URBAN BOUNDARY	5,745	5,190	7,140
	12.09	12.51	0.42		ALTA RESORT - ALBION BASIN LOOP	995	1,070	800
	12.51	13.61	1.10	*	SR 210 - JUNCTION SR 210 ALTA BYPASS ROAD	145	140	160
A00211	**0.00**	**19.05**	**19.05**	*	**DUGOUT RANCH - SR 191 NORTH OF MONTICELLO**	**190**	**200**	**150**
A00212	**0.00**	**1.29**	**1.29**	*	**JUNCTION FAI 15 - 300 EAST STREET IN WASHINGTON**	**13,880**	**14,050**	**13,460**
A00215	**0.00**	**1.16**	**1.16**	*	**JUNCTION SR 80 SPLIT**	**21,776**	**23,630**	**17,150**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00215	1.16	1.59	0.43		JUNCTION SR 186	59,423	64,470	46,800
	1.59	1.89	0.30		SR 80 SOUTHBOUND RAMP	72,566	78,730	57,150
	1.89	2.79	0.90		3300 SOUTH OVERPASS	58,840	63,840	46,340
	2.79	6.32	3.53		3900 SOUTH INTERCHANGE	48,885	53,040	38,500
	6.32	7.74	1.42		KNUDSEN CORNER INTERCHANGE	37,095	40,250	29,210
	7.74	9.04	1.30		2000 EAST INTERCHANGE	59,210	64,240	46,630
	9.04	9.44	0.40		UNION PARKWAY INTERCHANGE	87,610	95,060	69,000
	9.44	10.14	0.70		EAST INCORPORATED LIMITS MURRAY	87,610	95,060	69,000
	10.14	10.69	0.55		300 EAST NORTHBOUND EXIT	73,480	79,720	57,870
	10.69	11.55	0.86		STATE STREET EASTBOUND ENTRANCE	98,502	106,870	77,580
	11.55	13.20	1.65		JUNCTION FAI 15	92,595	101,440	70,480
	13.20	13.55	0.35		WEST INCORPORATED LIMITS MURRAY	92,595	101,440	70,480
	13.55	15.58	2.03		REDWOOD ROAD INTERCHANGE	80,785	88,500	61,490
	15.58	16.58	1.00		4700 SOUTH INTERCHANGE	88,540	97,000	67,390
	16.58	17.57	0.99		SOUTH INCORPORATED LIMITS WEST VALLEY CITY	88,540	97,000	67,390
	17.57	19.57	2.00		3500 SOUTH INTERCHANGE	80,750	88,460	61,460
	19.57	20.62	1.05		2100 SOUTH INTERCHANGE	47,884	54,770	30,680
	20.62	22.38	1.76		1300 SOUTH INTERCHANGE	53,350	61,020	34,180
	22.38	23.71	1.33		FAI 80 INTERCHANGE	45,465	52,000	29,130
	23.71	25.67	1.96		700 NORTH INTERCHANGE	34,695	39,680	22,230
	25.67	27.02	1.35		2200 NORTH INTERCHANGE	37,025	41,040	26,980
	27.02	27.47	0.45		SALT LAKE - DAVIS COUNTY LINE	37,025	41,040	26,980
	27.47	29.02	1.55		JUNCTION SR 68 - FAI 15 NORTH SALT LAKE	36,450	40,410	26,560
A00218	**0.00**	**4.22**	**4.22**	*	**JUNCTION SR 23**	**1,715**	**1,740**	**1,660**
	4.22	5.70	1.48		WEST INCORPORATED LIMITS AMALGA	1,715	1,740	1,660
	5.70	7.10	1.40		EAST INCORPORATED LIMITS AMALGA	3,665	3,710	3,560
	7.10	8.20	1.10		WEST INCORPORATED LIMITS SMITHFIELD - SR 91 SMITHFIELD	3,840	4,140	3,100
A00219	**0.00**	**1.67**	**1.67**	*	**WEST INCORPORATED LIMITS ENTERPRISE - SR 18**	**1,795**	**1,930**	**1,450**
A00224	**0.00**	**1.98**	**1.98**	*	**JUNCTION SR 113 IN MIDWAY**	**1,935**	**1,960**	**1,880**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00224	1.98	2.04	0.06		NORTH INCORPORATED LIMITS MIDWAY	1,935	1,960	1,880
	2.04	3.32	1.28		JUNCTION LOCAL ROAD - PINE CREEK CAMPGROUND	335	360	270
	3.33	6.81	3.49	*	WASATCH - SUMMIT COUNTY LINE	2,150	2,320	1,740
	6.81	7.67	0.86		SOUTH INCORPORATED LIMITS PARK CITY	7,685	7,780	7,450
	7.67	8.03	0.36		MARSAC AVENUE	7,685	7,780	7,450
	8.03	8.90	0.87		DEER VALLEY DRIVE	10,830	10,960	10,510
	8.90	9.04	0.14		SNOW COUNTRY ROAD	12,290	12,440	11,920
	9.04	9.35	0.31		PARK AVENUE	18,325	18,540	17,780
	9.35	9.98	0.63		JUNCTION SR 248 IN PARK CITY	19,985	19,140	22,090
	9.98	12.13	2.15		NORTH INCORPORATED LIMITS PARK CITY	16,335	15,650	18,050
	12.13	14.92	2.79		PARK WEST - FAI 80 KIMBALLS JUNCTION	11,255	10,780	12,440
A00225	**0.00**	**0.54**	**0.54**	*	**JUNCTION FAI 15 AT BURKE LANE**	**6,720**	**7,240**	**5,420**
	0.54	1.04	0.50		JUNCTION SR 89 - JUNCTION SR 106	6,770	7,290	5,460
A00226	**0.00**	**7.69**	**7.69**	*	**SNOW BASIN - SR 39 AT PINEVIEW RESERVOIR**	**170**	**170**	**160**
A00227	**0.00**	**0.42**	**0.42**	*	**JUNCTION FAI 15**	**4,685**	**5,050**	**3,780**
	0.42	1.13	0.71		SOUTH INCORPORATED LIMITS FARMINGTON - SR 106	4,685	5,050	3,780
A00228	**0.00**	**1.38**	**1.38**	*	**SOUTHBOUND RAMP FAI 15 - NORTH LEEDS INTERCHANGE**	**1,395**	**1,500**	**1,130**
A00232	**0.00**	**0.14**	**0.14**	*	**JUNCTION SR 126**	**31,215**	**33,630**	**25,170**
	0.14	0.27	0.13		NORTH LAYTON INTERCHANGE	36,990	39,860	29,820
	0.27	1.27	1.00		GORDON AVENUE LAYTON	19,605	21,120	15,810
	1.27	2.26	0.99		JUNCTION SR 108 VIA HILL AIR FORCE BASE ROAD	20,205	21,770	16,290
	2.26	2.42	0.16		JUNCTION SR 193 - HILL AIR FORCE BASE SOUTH GATE	17,995	17,560	19,080
A00235	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 89**	**16,500**	**17,780**	**13,300**
	0.50	1.01	0.51		JUNCTION 400 NORTH VIA WASHINGTON BOULEVARD	22,990	24,770	18,540
	1.01	1.23	0.22		LARSEN LANE	21,620	23,300	17,430
	1.23	1.80	0.57		JUNCTION 1100 NORTH	20,165	21,730	16,260
	1.80	2.04	0.24		NORTH INC. LIMITS OGDEN & SOUTH INC. LIMITS NORTH OGDEN	20,165	21,730	16,260
	2.04	3.07	1.03		JUNCTION 1700 NORTH IN NORTH OGDEN	19,740	21,270	15,910
	3.07	3.22	0.15		JUNCTION 2550 NORTH VIA WASHINGTON BOULEVARD	6,170	6,650	4,970

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00235	3.22	3.66	0.44		WEST INC. LIMITS NORTH OGDEN VIA 2550 NORTH STREET	6,265	6,750	5,050
	3.66	3.73	0.07		W. INC. LIMITS NORTH OGDEN & E. INC. LIMITS PLEASANT VIEW	6,265	6,750	5,050
	3.73	4.86	1.13		PLEASANT VIEW - SR 89	6,265	6,750	5,050
A00237	**0.00**	**0.38**	**0.38**	*	**JUNCTION 700 NORTH VIA 800 EAST IN LOGAN**	**10,305**	**10,060**	**10,930**
	0.38	0.88	0.50		JUNCTION SR 288	8,695	9,370	7,010
	0.88	1.01	0.13		JUNCTION SR 239 1400 NORTH LOGAN	6,450	6,950	5,200
	1.01	1.39	0.38		NORTH INC. LIMITS LOGAN & SOUTH INC. LIMITS NORTH LOGAN	5,330	5,740	4,300
	1.39	2.75	1.36		1800 NORTH	4,210	4,540	3,390
	2.75	4.32	1.57		NORTH INC. LIMITS NORTH LOGAN & S. INC. LIMITS HYDE PARK	3,345	3,600	2,700
	4.32	4.79	0.47		200 WEST STREET - SR 91	3,345	3,600	2,700
A00238	**0.00**	**0.17**	**0.17**	*	**JUNCTION SR 165**	**1,710**	**1,840**	**1,380**
	0.17	1.71	1.54		EAST INC. LIMITS NIBLEY & WEST INC. LIMITS MILLVILLE	1,710	1,840	1,380
	1.71	3.25	1.54		NORTH INC. LIMITS MILLVILLE & S. INC. LIMITS PROVIDENCE	1,555	1,680	1,250
	3.25	3.35	0.10		NORTH INCORPORATED LIMITS PROVIDENCE	1,555	1,680	1,250
	3.35	4.16	0.81		SOUTH INCORPORATED LIMITS RIVER HEIGHTS	3,175	3,420	2,560
	4.16	4.21	0.05		NORTH INC. LIMITS RIVER HEIGHTS & SOUTH INC.LIMITS LOGAN	4,765	5,130	3,840
	4.21	4.68	0.47		VIA 300 SOUTH - SR 91	6,235	6,720	5,030
A00239	**0.00**	**1.04**	**1.04**	*	**JUNCTION SR 91 - JUNCTION SR 237**	**16,285**	**17,550**	**13,130**
A00240	**0.00**	**1.22**	**1.22**	*	**SOUTHBOUND RAMP FAI 15 - SR 38**	**4,280**	**4,330**	**4,150**
A00241	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 114 - FAI 15 VIA 1600 NORTH OREM**	**13,765**	**14,830**	**11,100**
A00243	**0.00**	**2.41**	**2.41**	*	**JUNCTION SR 89 - BEAVER MOUNTAIN SKI AREA**	**605**	**610**	**590**
A00244	**0.00**	**0.19**	**0.19**	*	**JUNCTION SR 6 VIA POPLAR STREET**	**3,415**	**3,460**	**3,310**
	0.19	0.91	0.72		JUNCTION SR 157 VIA MAIN STREET - SR 6	3,000	3,040	2,910
A00248	**0.00**	**1.37**	**1.37**	*	**JUNCTION SR 224**	**9,090**	**8,710**	**10,050**
	1.37	3.12	1.75		NORTHEAST INCORPORATED LIMITS PARK CITY	4,500	4,310	4,970
	3.12	4.51	1.39		JUNCTION SR 40	3,550	3,400	3,920
	4.51	4.63	0.12		SUMMIT - WASATCH COUNTY LINE	3,550	3,400	3,920
	4.63	9.56	4.93		JUNCTION FAS 189 ROAD TO PEOA	2,295	2,200	2,540
	9.56	14.45	4.89		WASATCH - SUMMIT COUNTY LINE - JUNCTION SR 32	2,295	2,200	2,540

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00256	**0.00**	**1.60**	**1.60**	*	**JUNCTION SR 89**	**1,965**	**1,990**	**1,910**
	1.60	2.52	0.92		SOUTH INCORPORATED LIMITS REDMOND	460	470	450
	2.52	4.51	1.99		NORTH INCORPORATED LIMITS REDMOND	510	520	490
	4.51	5.62	1.11		SEVIER - SANPETE COUNTY LINE - JUNCTION SR 89	510	520	490
A00257	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 21 IN MILFORD**	**510**	**520**	**490**
	0.50	12.46	11.96		NORTH INCORPORATED LIMITS MILFORD	390	370	430
	12.46	22.35	9.89		BEAVER - MILLARD COUNTY LINE	485	460	540
	22.35	53.64	31.29		BLACK ROCK	485	460	540
	53.64	66.24	12.60		CLEAR LAKE	990	950	1,090
	66.24	69.26	3.02		DESERET- SR 6 EAST OF HINCKLEY	1,275	1,220	1,410
A00258	**0.00**	**0.18**	**0.18**	*	**JUNCTION FAI 70**	**560**	**570**	**540**
	0.18	0.47	0.29		300 WEST IN ELSINORE	560	570	540
	0.47	0.94	0.47		CENTER STREET IN ELSINORE	1,735	1,760	1,680
	0.94	2.12	1.18		EAST INCORPORATED LIMITS ELSINORE - SR 118	1,630	1,650	1,580
A00259	**0.00**	**0.33**	**0.33**	*	**JUNCTION SR 24 - FAI 70**	**2,125**	**2,150**	**2,060**
A00260	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 24**	**1,995**	**2,020**	**1,940**
	0.62	1.83	1.21		SOUTH INCORPORATED LIMITS AURORA	1,205	1,220	1,170
	1.83	4.19	2.36		NORTH INCORPORATED LIMITS AURORA - JUNCTION SR 50	1,265	1,280	1,230
A00261	**0.00**	**0.87**	**0.87**	*	**JUNCTION SR 163**	**75**	**80**	**70**
	0.87	22.69	21.82		JUNCTION SR 316 GOOSENECKS STATE PARK	75	80	70
	22.69	32.74	10.05		JUNCTION LOCAL ROAD - JUNCTION SR 95	75	80	70
A00262	**0.00**	**30.58**	**30.58**	*	**JUNCTION SR 191**	**640**	**610**	**710**
	30.58	40.12	9.54		ANETH - UTAH - COLORADO STATE LINE	1,050	1,010	1,160
A00264	**0.00**	**5.07**	**5.07**	*	**JUNCTION SR 31**	**505**	**510**	**490**
	5.07	10.74	5.67		SANPETE - EMERY COUNTY LINE	505	510	490
	10.74	15.34	4.60		EMERY - CARBON COUNTY LINE - JUNCTION SR 96	505	510	490
A00265	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 114**	**6,920**	**7,460**	**5,580**
	0.44	2.28	1.84		JUNCTION FAI 15 VIA 1200 SOUTH IN OREM	37,850	40,450	31,350
	2.28	2.73	0.45		JUNCTION SR 89 IN OREM	39,340	42,040	32,580

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00265	2.73	3.66	0.93		800 EAST IN OREM VIA UNIVERSITY PARKWAY (BYU DIAG.)	37,610	40,190	31,150
	3.66	4.11	0.45		SOUTH INC. LIMITS OREM & NORTH INC. LIMITS PROVO	37,610	40,190	31,150
	4.11	4.32	0.21		200 WEST - UNIVERSITY AVENUE	37,610	40,190	31,150
A00266	**0.00**	**0.76**	**0.76**	*	**JUNCTION FAI 215**	**40,030**	**42,780**	**33,150**
	0.76	2.48	1.72		REDWOOD ROAD VIA 4700 SOUTH	35,175	37,590	29,130
	2.48	2.83	0.35		WEST INCORPORATED LIMITS MURRAY	33,520	35,820	27,760
	2.83	3.36	0.53		JUNCTION FAI 15 VIA 4500 SOUTH	33,420	37,680	22,780
	3.36	3.51	0.15		MAIN STREET	32,780	36,950	22,340
	3.51	3.91	0.40		STATE STREET VIA 4500 SOUTH	35,745	38,200	29,600
	3.91	4.10	0.19		EAST INCORPORATED LIMITS MURRAY	35,745	38,200	29,600
	4.10	4.39	0.29		500 EAST STREET FAU 1037	33,100	35,370	27,410
	4.39	4.70	0.31		700 EAST STREET SR 71 VIA 4500 SOUTH	25,450	27,200	21,080
	4.70	5.30	0.60		900 EAST STREET	17,225	18,410	14,270
	5.30	5.96	0.66		1300 EAST STREET SR 181 VIA 4500 SOUTH	15,090	16,130	12,500
	5.96	6.85	0.89		HIGHLAND DRIVE	10,915	11,670	9,040
	6.85	7.36	0.51		2300 EAST STREET VIA 4500 SOUTH	10,915	11,670	9,040
	7.36	8.07	0.71		2700 EAST STREET - WASATCH BOULEVARD	11,500	12,290	9,520
A00268	**0.00**	**0.70**	**0.70**	*	**JUNCTION FAI 15 - 300 WEST VIA 600 NORTH IN SALT LAKE CITY**	**31,910**	**34,380**	**25,730**
A00269	**0.00**	**0.58**	**0.58**	*	**JUNCTION GORE FAI 15**	**45,445**	**51,290**	**30,830**
	0.58	0.72	0.14		300 WEST VIA 600 SOUTH	32,860	37,090	22,290
	0.72	1.01	0.29		WEST TEMPLE - STATE STREET VIA 600 SOUTH	30,635	34,580	20,780
	1.01	1.30	0.29	*	STATE STREET VIA 500 SOUTH WESTBOUND	31,130	35,380	20,510
	1.30	1.60	0.30		WEST TEMPLE	33,695	38,290	22,200
	1.60	2.18	0.58		300 WEST - JUNCTION GORE FAI 15 VIA 500 SOUTH	47,750	54,260	31,460
A00270	**0.00**	**1.18**	**1.18**	*	**JUNCTION FAI 15 AT 900 SOUTH OFF RAMP**	**23,655**	**25,670**	**18,630**
	1.18	1.93	0.75		900 SOUTH - 400 SOUTH VIA WEST TEMPLE	25,280	27,240	20,380
A00271	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 274**	**915**	**930**	**890**
	1.10	3.53	2.43		NORTH INCORPORATED LIMITS PAROWAN	840	850	810
	3.53	4.32	0.79		SOUTH INCORPORATED LIMITS PARAGONAH	725	730	700

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00270	4.32	5.61	1.29		NORTH INCORPORATED LIMITS PARAGONAH - JUNCTION FAI 15	150	150	150
A00272	**0.00**	**0.64**	**0.64**	*	**JUNCTION SR 106**	**4,815**	**5,190**	**3,880**
	0.64	0.98	0.34	*	LOCAL ROAD - SR 89	5,715	6,160	4,610
A00273	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 89**	**8,675**	**9,350**	**6,990**
	0.20	0.42	0.22		NORTHWEST INCORPORATED LIMITS FARMINGTON	8,675	9,350	6,990
	0.42	2.34	1.92		SOUTH INCORPORATED LIMITS KAYSVILLE	12,465	13,430	10,050
	2.34	2.96	0.62		200 NORTH VIA MAIN - FAI 15 VIA 200 NORTH	13,810	14,880	11,130
A00274	**0.00**	**1.07**	**1.07**	*	**JUNCTION SR 143 IN PAROWAN**	**2,030**	**2,050**	**1,970**
	1.07	1.24	0.17		NORTH INCORPORATED LIMITS PAROWAN - FAI 15	1,130	1,140	1,100
A00275	**0.00**	**3.83**	**3.83**	*	**JUNCTION SR 95 - NATURAL BRIDGES NATIONAL MONUMENT**	**175**	**180**	**170**
A00276	**0.00**	**27.60**	**27.60**	*	**JUNCTION SR 95**	**765**	**730**	**850**
	27.60	35.11	7.51		TICABOO ROAD - GLEN CANYON NATIONAL RECREATION AREA	560	540	620
	35.12	71.22	36.11		GLEN CANYON RECREATION AREA - SR 95	285	270	310
A00279	**0.00**	**15.29**	**15.29**	*	**POTASH PLANT - SR 191 NORTH OF MOAB**	**370**	**370**	**360**
A00280	**0.00**	**0.40**	**0.40**	*	**JUNCTION FAI 80 - MAIN STREET IN COALVILLE**	**4,295**	**4,350**	**4,170**
A00282	**0.00**	**0.06**	**0.06**	*	**500 SOUTH VIA GUARDSMAN WAY SR 282 - 400 SOUTH**	**23,850**	**25,700**	**19,230**
	0.07	0.48	0.41	*	UNIVERSITY STREET VIA 400 SOUTH SR 282	11,475	11,200	12,170
	0.48	1.04	0.56		GUARDSMAN WAY VIA HEMPSTEAD - WASATCH DRIVE	16,065	17,310	12,950
	1.05	1.14	0.09	*	FOOTHILL BOULEVARD SR 186 VIA WASATCH DRIVE SR 282	26,245	28,280	21,160
	1.14	1.43	0.29		JUNCTION POLLOCK ROAD VIA WASATCH DRIVE SR 282	27,015	29,110	21,780
	1.43	1.64	0.21		JUNCTION HEMPSTEAD ROAD VIA WASATCH DRIVE	28,685	27,990	30,420
	1.64	1.90	0.26		JUNCTION WASATCH DRIVE VIA MEDICAL DRIVE SR 282	14,710	14,350	15,600
	1.90	2.44	0.54		JUNCTION ROAD TO HOSPITAL AREA VIA SR 282	6,775	6,610	7,180
	2.44	2.54	0.10		JUNCTION 500 AVENUE	6,775	6,610	7,180
	2.54	3.55	1.01		JCT. MILITARY WEST - 100 SOUTH VIA NORTH CAMPUS ROAD	6,775	6,610	7,180
A00283	**0.00**	**1.33**	**1.33**	*	**JCT. SR 55 - COLLEGE OF EASTERN UTAH VIA 300 EAST PRICE**	**5,880**	**6,340**	**4,740**
A00284	**0.00**	**0.56**	**0.56**	*	**JUNCTION 4100 SOUTH VIA SR 284 - HARRISON BOULEVARD**	**2,715**	**2,650**	**2,880**
	0.56	1.01	0.45	*	JUNCTION SR 203 - TAYLOR AVENUE	7,890	7,700	8,370
	1.01	1.67	0.66	*	JUNCTION PERIPHERAL ROAD - SKYLINE DRIVE SR 284	2,430	2,370	2,580

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00284	1.67	1.72	0.05	*	JUNCTION HARRISON BOULEVARD - PERIPHERAL ROAD	7,655	7,470	8,120
	1.72	1.75	0.03	*	JUNCTION SR 203 VIA 4000 SOUTH - PERIPHERAL ROAD	4,365	4,260	4,630
A00285	**0.00**	**0.37**	**0.37**	*	**ROADS ON GROUNDS OF INSTITUTE FOR THE DEAF**	**50**	**50**	**50**
A00286	**0.00**	**1.19**	**1.19**	*	**JUNCTION SR 235 - YOUTH DEVELOPMENT CENTER**	**765**	**750**	**810**
A00287	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 140 - VEHICLE DIRECTION STATION**	**3,385**	**3,300**	**3,590**
A00288	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 89 VIA 1200 EAST**	**7,150**	**6,980**	**7,580**
	0.50	0.99	0.49		1000 NORTH SR 288 - SR 237	7,910	7,720	8,390
A00289	**0.00**	**0.66**	**0.66**	*	**JUNCTION MAIN STREET SR 130 VIA CENTER STREET**	**13,630**	**14,690**	**10,990**
	0.66	1.29	0.63		800 WEST VIA CENTER STREET	7,335	7,900	5,910
	1.29	1.67	0.38		800 WEST VIA 200 SOUTH	6,565	6,410	6,960
	1.67	1.88	0.21		300 WEST - CENTER STREET VIA 300 WEST	7,145	7,700	5,760
A00290	**0.00**	**1.16**	**1.16**	*	**JUNCTION SR 89 TO SNOW COLLEGE IN EPHRAIM**	**3,970**	**4,280**	**3,200**
A00291	**0.00**	**0.47**	**0.47**	*	**HARRISON BOULEVARD - STATE SCHOOL FOR THE BLIND**	**115**	**110**	**120**
A00292	**0.00**	**1.68**	**1.38**	*	**ROADS ON SALT LAKE COMMUNITY COLLEGE**	**5,885**	**5,740**	**6,240**
A00293	**0.00**	**1.05**	**1.05**	*	**ROADS ON STATE CAPITOL GROUNDS**	**2,240**	**2,190**	**2,380**
A00294	**0.00**	**0.38**	**0.38**	*	**ROADS AT STATE MENTAL HOSPITAL**	**1,720**	**1,680**	**1,820**
A00295	**0.00**	**0.65**	**0.65**	*	**MOTOR VEHICLE TEST COURSE OREM**	**215**	**210**	**230**
A00296	**0.00**	**1.50**	**1.50**	*	**ROADS ON GROUNDS OF AMERICAN FORK TRAINING SCHOOL**	**1,075**	**1,050**	**1,140**
A00297	**0.00**	**1.25**	**1.25**	*	**ROADS ON STATE FAIR GROUNDS**	**1,060**	**1,030**	**1,120**
A00298	**0.00**	**1.00**	**1.00**	*	**ROADS WITHIN BROWNING ARMORY SOUTH OGDEN**	**1,020**	**1,000**	**1,080**
A00299	**0.00**	**1.03**	**1.03**	*	**MOTOR VEHICLE TEST COURSE**	**1,735**	**1,690**	**1,840**
A00300	**0.00**	**4.33**	**4.33**	*	**SNOW CANYON ROAD**	**785**	**790**	**760**
A00301	**0.00**	**2.04**	**2.04**	*	**STEINAKER STATE PARK ROAD**	**185**	**200**	**150**
A00302	**0.00**	**3.60**	**3.60**	*	**ROCKPORT STATE PARK ROAD**	**580**	**620**	**470**
A00303	**0.00**	**1.28**	**1.28**	*	**GOBLIN VALLEY STATE PARK ROAD**	**105**	**110**	**80**
A00304	**0.00**	**0.26**	**0.26**	*	**HYRUM STATE PARK ROAD**	**1,065**	**1,150**	**860**
A00306	**0.00**	**0.18**	**0.18**	*	**EAST CANYON STATE PARK ROAD**	**375**	**400**	**300**
A00308	**0.00**	**2.14**	**2.14**	*	**KODACHROME STATE PARK ROAD**	**100**	**110**	**80**
A00309	**0.00**	**0.33**	**0.33**	*	**MILLSITE STATE PARK ROAD**	**240**	**260**	**190**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
A00310	**0.00**	**0.34**	**0.34**	*	**MINERSVILLE STATE PARK ROAD**	**230**	**250**	**190**
A00311	**0.00**	**1.21**	**1.21**	*	**JUNCTION SR 40**	**370**	**400**	**300**
	1.21	2.56	1.35		BEGIN CONSTRUCTED - STARVATION BOAT RAMP	300	320	240
A00312	**0.00**	**0.58**	**0.58**	*	**WILLARD BAY STATE PARK ROAD SOUTH MARINA**	**430**	**460**	**350**
A00313	**0.00**	**2.20**	**2.20**	*	**DEAD HORSE POINT**	**600**	**610**	**580**
	2.20	22.60	20.40		SAN JUAN - GRAND COUNTY LINE - JUNCTION SR 191	480	490	470
A00314	**0.00**	**0.76**	**0.76**	*	**JUNCTION SR 189 - BOAT RAMP DEER CREEK RESEVIOR**	**375**	**400**	**300**
A00315	**0.00**	**1.74**	**1.74**	*	**WILLARD BAY STATE PARK ROAD NORTH MARINA**	**1,765**	**1,900**	**1,420**
A00316	**0.00**	**3.53**	**3.53**	*	**GOOSENECKS STATE PARK - JUNCTION SR 261**	**130**	**130**	**130**
A00317	**0.00**	**1.62**	**1.62**	*	**ROADS ON UTAH DEPARTMENT OF TRANSPORTATION GRNDS**	**2,085**	**2,030**	**2,210**
A00318	**0.00**	**2.22**	**2.22**	*	**JUNCTION SR 9 - QUAIL CREEK STATE PARK**	**2,500**	**2,690**	**2,020**
A00319	**0.00**	**1.43**	**1.43**	*	**JUNCTION SR 40 - JORDANELLE RESEVIOR**	**1,500**	**1,620**	**1,210**
A00320	**0.00**	**2.19**	**2.19**	*	**EMERGENCY VEHICLE OPERATION FACILITY**	**125**	**130**	**100**
A00666	**0.00**	**1.70**	**1.70**	*	**JUNCTION SR 191**	**4,020**	**3,970**	**4,140**
	1.70	17.09	15.39		EAST INC. LIMITS MONTICELLO - UTAH - COLORADO STATE LINE	1,925	1,870	2,060
102	**2.28**	**2.57**	**0.29**	*	**LOCAL ROAD LEFT**	**440**	**430**	**470**
	2.57	3.94	1.37		TOOELE URBAN BOUNDARY - INTERNATIONAL SMELTER	440	430	470
103	**0.00**	**3.32**	**3.32**	*	**JUNCTION SR 112 - JUNCTION SR 138 EAST OF GRANTSVILLE**	**690**	**660**	**760**
104	**0.00**	**1.55**	**1.55**	*	**JUNCTION SR 138**	**525**	**500**	**580**
	1.55	5.93	4.38		N. INC. LIMITS GRANTSVILLE - FAI 80 BURMESTER INTERCHANGE	450	430	500
107	**0.00**	**1.14**	**1.14**	*	**JUNCTION SR 58**	**305**	**290**	**340**
	1.14	2.23	1.09		WENDOVER EAST INCORPORATED LIMITS	305	290	340
	2.23	3.09	0.86		INDUSTRIAL SITE - FAI 80 NEAR WENDOVER	220	210	240
108	**0.00**	**21.34**	**21.34**	*	**JUNCTION SR 199 DUGWAY PROVING GROUNDS**	**325**	**310**	**360**
	21.34	36.72	15.38		IOSEPA - FAI 80 TIMPIE WATERFOWL AREA	565	540	620
111	**2.49**	**3.00**	**0.51**	*	**JUNCTION SR 201 2100 SOUTH STREET VIA 7200 WEST**	**640**	**690**	**520**
	3.00	4.80	1.80	*	BEGIN UNCONSTRUCTED	NA	NA	NA
	4.80	6.02	1.22	*	BEGIN CONSTRUCTED	350	380	280
112	**0.00**	**7.19**	**7.19**	*	**ANTELOPE STATE PARK - JUNCTION SR 110**	**535**	**510**	**590**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
120	**0.00**	**1.92**	**1.92**	*	**JUNCTION WEST DAVIS HIGHWAY - JUNCTION SR 227**	**1,280**	**1,250**	**1,360**
128	**0.00**	**15.16**	**15.16**	*	**JUNCTION FAI 80 AT ROWLEY JUNCTION - MAGNESIUM PLANT**	**585**	**560**	**650**
133	**7.58**	**13.20**	**5.62**	*	**SALT LAKE URBAN BOUNDARY**	**2,540**	**2,430**	**2,810**
	13.20	16.75	3.55		ROAD TO PINECREST - SR 65	855	820	940
135	**2.34**	**7.77**	**5.43**	*	**HERRIMAN VIA 12600 SOUTH STREET**	**2,575**	**2,470**	**2,850**
	7.77	9.86	2.09		SOUTH INCORPORATED LIMITS JORDAN - JUNCTION FAU 1004	9,260	8,870	10,230
156	**0.00**	**1.52**	**1.52**	*	**UNCONSTRUCTED**	**NA**	**NA**	**NA**
	1.52	2.00	0.48	*	BEGIN CONSTRUCTED	670	720	540
181	**0.00**	**1.04**	**1.04**	*	**JUNCTION FAS 188**	**1,625**	**1,560**	**1,800**
	1.04	2.34	1.30		EAST INCORPORATED LIMITS COALVILLE	1,245	1,190	1,380
	2.34	10.31	7.97		LOCAL ROAD EAST OF COALVILLE	1,090	1,040	1,200
	10.31	13.61	3.30		UPTON	495	470	550
	13.61	17.86	4.25		PINEVIEW	415	400	460
	17.86	28.24	10.38		PINE CLIFF - JUNCTION SR 150	295	280	330
	28.24	37.90	9.66	*	UNCONSTRUCTED	NA	NA	NA
183	**0.00**	**2.87**	**2.87**	*	**JUNCTION SR 32**	**825**	**790**	**910**
	2.87	11.71	8.84		EAST INCORPORATED LIMITS OAKLEY	710	680	780
	11.71	18.87	7.16		SMITH&MOREHOUSE ROAD-NAT. FOREST BNDRY HOLIDAY PARK	280	300	230
188	**0.41**	**6.68**	**6.27**	*	**JUNCTION SR 32 NEAR WANSHIP**	**1,715**	**1,640**	**1,900**
	6.68	7.97	1.29		SOUTH INCORPORATED LIMITS COALVILLE	1,750	1,680	1,930
	7.97	9.35	1.38		JUNCTION FAS 181 IN COALVILLE	1,275	1,220	1,410
	9.35	13.30	3.95		NORTH INCORPORATED LIMITS COALVILLE - FAI 80	2,375	2,280	2,620
189	**0.00**	**0.43**	**0.43**	*	**JUNCTION SR 248**	**1,965**	**1,880**	**2,170**
	0.43	6.76	6.33		WASATCH - SUMMIT COUNTY LINE - SR 32 WEST OF OAKLEY	1,965	1,880	2,170
192	**0.00**	**7.55**	**7.55**	*	**UTAH - WYOMING STATE LINE**	**210**	**200**	**230**
	7.55	13.29	5.74	*	UNCONSTRUCTED	NA	NA	NA
	13.29	25.38	12.09	*	BEGIN CONSTRUCTION PORTION - COLORADO STATE LINE	195	190	220
205	**0.00**	**2.95**	**2.95**	*	**SARATOGA RESORT - URBAN BOUNDARY FAU 1401**	**400**	**380**	**440**
210	**0.00**	**3.69**	**3.69**	*	**JUNCTION SR 77**	**315**	**300**	**350**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
217	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 115 - FAI 15 SOUTH OF BENJAMIN**	**645**	**620**	**710**
242	**0.00**	**0.58**	**0.58**	*	**JUNCTION SR 40 IN HEBER**	**2,800**	**2,680**	**3,090**
	0.58	4.42	3.84		EAST INCORPORATED LIMITS HEBER	1,580	1,510	1,750
	4.42	14.00	9.58		POLE CREEK CANYON - UINTAH NATIONAL FOREST BOUNDARY	735	700	810
247	**0.00**	**2.76**	**2.76**	*	**JUNCTION SR 189**	**1,055**	**1,010**	**1,170**
	2.76	3.64	0.88		NORTH INC. LIMITS WALLSBURG - CENTER OF WALLSBURG	1,020	980	1,130
250	**0.00**	**1.48**	**1.48**	*	**JUNCTION SR 224**	**1,525**	**1,460**	**1,690**
	1.48	4.37	2.89		EAST INCORPORATED LIMITS MIDWAY - SR 40 NORTH OF HEBER	2,440	2,340	2,700
252	**0.00**	**9.02**	**9.02**	*	**JUNCTION SR 40 - SR 87 NEAR BRIDGELAND**	**370**	**350**	**410**
253	**0.00**	**8.05**	**8.05**	*	**JUNCTION SR 40 NEAR FORT DUCHESNE - SR 121**	**1,425**	**1,370**	**1,570**
257	**0.00**	**12.68**	**12.68**	*	**JUNCTION SR 121 - NEOLA**	**945**	**910**	**1,040**
262	**0.00**	**3.24**	**3.24**	*	**RED WASH OIL FIELD - SR 45**	**155**	**150**	**170**
	3.24	15.61	12.37	*	SR 45 - SR 40 NEAR JENSEN	560	540	620
264	**0.00**	**1.10**	**1.10**	*	**JUNCTION SR 40**	**3,985**	**3,820**	**4,400**
	1.10	14.27	13.17		FORT DUCHESNE - JUNCTION SR 88	1,385	1,330	1,530
270	**0.00**	**4.55**	**4.55**	*	**YUBA STATE PARK - FAI 15 SOUTH OF LEVAN**	**375**	**360**	**410**
272	**0.00**	**3.95**	**3.95**	*	**MAIN ENTRANCE TO INTERMOUNTAIN POWER PLANT**	**250**	**240**	**280**
	3.95	14.04	10.09		JUNCTION FAS 301	250	240	280
	14.04	35.75	21.71		MILLARD - JUAB COUNTY LINE - TOPAZ MOUNTAIN	275	260	300
273	**0.00**	**9.33**	**9.33**	*	**SR 6 JERICHO JUNCTION - JUNCTION SR 132 WEST OF NEPHI**	**150**	**140**	**170**
274	**0.00**	**0.67**	**0.67**	*	**CENTER OF MONA**	**500**	**480**	**550**
	0.67	6.99	6.32		WEST INCORPORATED LIMITS MONA	285	270	310
	6.99	10.41	3.42		JUAB - UTAH COUNTY LINE	325	310	360
	10.41	10.95	0.54		SOUTH INCORPORATED LIMITS GOSHEN - SR 6 IN GOSHEN	435	420	480
277	**0.00**	**3.70**	**3.70**	*	**JUNCTION SR 28**	**105**	**100**	**120**
	3.70	8.07	4.37		JUNCTION SR 132 WEST OF NEPHI - OLD SR 41	260	250	290
283	**0.00**	**0.20**	**0.20**	*	**JUNCTION SR 117 IN WALES AT 200 NORTH**	**280**	**270**	**310**
	0.20	8.92	8.72		NORTH INCORPORATED LIMITS WALES	445	430	490
	8.92	9.65	0.73		SOUTH INC. LIMITS FOUNTAIN GREEN - JUNCTION SR 132	300	290	330

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
287	**0.00**	**1.57**	**1.57**	*	**JUNCTION SR 137**	**930**	**890**	**1,030**
	1.57	3.50	1.93		EAST INC. LIMITS MAYFIELD - MANTI LA SAL NAT. FOREST BNDRY	605	580	670
290	**0.00**	**4.83**	**4.83**	*	**CONSUMERS**	**295**	**280**	**330**
	4.83	12.57	7.74		LOCAL ROAD - SR 6 NEAR SPRING GLEN	630	600	700
291	**0.00**	**2.10**	**2.10**	*	**BEGINNING OF ROUTE NEAR MUTUAL**	**425**	**410**	**470**
	2.10	6.90	4.80		SPRING CANYON	955	910	1,060
	6.90	7.96	1.06		WEST INCORPORATED LIMITS HELPER - JUNCTION SR 6	1,500	1,440	1,660
298	**0.52**	**2.86**	**2.34**	*	**PRICE NORTHEAST URBAN BOUNDARY**	**2,030**	**1,940**	**2,240**
	2.86	3.44	0.58		CARBONVILLE - SR 6	2,675	2,560	2,960
299	**0.73**	**4.25**	**3.52**	*	**PRICE EAST URBAN BOUNDARY - CARBON COUNTY AIRPORT**	**2,265**	**2,170**	**2,500**
301	**0.00**	**4.69**	**4.69**	*	**SR 6 WEST OF DELTA**	**2,840**	**2,720**	**3,140**
	4.69	10.80	6.11		SUTHERLAND	1,700	1,830	1,370
	10.80	13.78	2.98		SUGARVILLE - FAS 272	225	240	180
307	**0.00**	**6.91**	**6.91**	*	**JUNCTION FAI 15 - SOUTH INCORPORATED LIMITS KANOSH**	**410**	**390**	**450**
309	**0.00**	**4.09**	**4.09**	*	**FAI 15 MEADOW INTERCHANGE**	**300**	**290**	**330**
	4.09	6.14	2.05		JUNCTION LOCAL ROAD 4 MILES NORHT - SR 100	215	210	240
315	**0.00**	**0.55**	**0.55**	*	**JUNCTION SR 89**	**615**	**590**	**680**
	0.55	2.41	1.86		CENTER OF CENTRAL	1,215	1,160	1,340
	2.41	3.01	0.60		WEST INCORPORATED LIMITS ANNABELLA	1,220	1,170	1,350
	3.01	7.13	4.12		NORTH INCORPORATED LIMITS ANNABELLA	1,295	1,240	1,430
	7.13	7.16	0.03		EAST INCORPORATED LIMITS RICHFIELD	1,200	1,150	1,330
	7.16	7.44	0.28		EAST URBAN BOUNDARY - JUNCTION LOCAL ROAD	1,200	1,150	1,330
319	**0.00**	**6.35**	**6.35**	*	**JUNCTION SR 25 AT FISH LAKE**	**170**	**160**	**190**
	6.35	31.36	25.01		JUNCTION FAS 377	40	40	40
	31.36	35.34	3.98		JUNCTION LOCAL ROAD AT SOLDIER CANYON - FAI 70	35	30	40
330	**0.00**	**4.35**	**4.35**	*	**JUNCTION SR 89**	**650**	**620**	**720**
	4.35	29.13	24.78		MANTI NATIONAL FOREST BOUNDARY	175	170	190
	29.13	29.59	0.46		EMERY COUNTY LINE - JOES VALLEY RESEVOIR	175	170	190
331	**0.73**	**2.74**	**2.01**	*	**PRICE NORTHWEST URBAN BOUNDARY - JUNCTION FAS 298**	**515**	**490**	**570**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
333	**0.00**	**3.32**	**3.32**	*	**JUNCTION SR 155**	**380**	**360**	**420**
	3.32	3.74	0.42		SOUTH INCORPORATED LIMITS OF ELMO	220	210	240
	3.74	5.38	1.64		NORTH INCORPORATED LIMITS ELMO - JUNCTION SR 155	190	180	210
334	**0.00**	**1.93**	**1.93**	*	**JUNCTION SR 10 SOUTH OF HUNTINGTON - LAWRENCE**	**485**	**460**	**540**
336	**0.00**	**5.23**	**5.23**	*	**FOREST BOUNDARY**	**1,115**	**1,070**	**1,230**
	5.23	6.23	1.00		WEST INCORPORATED LIMITS FERRON - SR 10 IN FERRON	1,540	1,480	1,700
344	**0.00**	**8.95**	**8.95**	*	**JUNCTION SR 128 NORTHEAST OF MOAB - CASTLETON**	**545**	**520**	**600**
346	**0.00**	**1.61**	**1.61**	*	**SAN JUAN COUNTY LINE - SR 279 POTASH PLANT**	**495**	**470**	**550**
351	**0.00**	**0.93**	**0.93**	*	**JUNCTION SR 130**	**520**	**500**	**570**
	0.93	14.66	13.73		WEST INCORPORATED LIMITS MINERSVILLE	320	310	350
	14.66	14.96	0.30		SOUTH INCORPORATED LIMITS MILFORD - SR 21 IN MILFORD	505	480	560
357	**0.00**	**0.14**	**0.14**	*	**JUNCTION SR 160 IN BEAVER**	**1,190**	**1,140**	**1,320**
	0.14	4.93	4.79		NORTH INCORPORATED LIMITS BEAVER	820	790	910
	4.93	8.77	3.84		JUNCTION LOCAL ROAD AT MANDERFIELD - FAI 15	70	70	80
358	**27.40**	**50.97**	**23.57**	*	**JUNCTION BURR TRAIL**	**90**	**90**	**100**
	50.97	60.52	9.55		GARFIELD - WAYNE COUNTY LINE - JUNCTION SR 24	75	70	80
361	**0.00**	**13.37**	**13.37**	*	**TROPIC JUNCTION SR 12**	**50**	**50**	**60**
	13.37	33.72	20.35		WIDTSOE	50	50	60
	33.72	34.98	1.26		SOUTH INCORPORATED LIMITS ANTIMONY - SR 22 IN ANTIMONY	135	130	150
371	**0.00**	**4.00**	**4.00**		**GOBLIN VALLEY-SR 24 UNCONSTRUCTED**	**NA**	**NA**	**NA**
377	**0.00**	**3.41**	**3.41**	*	**JUNCTION SR 72 NORTH OF LOA**	**50**	**50**	**60**
	3.41	14.08	10.67		WAYNE - SEVIER COUNTY LINE - JUNCTION FAS 319	95	90	100
379	**0.00**	**7.58**	**7.58**	*	**JUNCTION FAS 380 - WECCO PLANT WEST OF CEDAR CITY**	**650**	**620**	**720**
380	**4.58**	**7.49**	**2.91**	*	**JUNCTION FAS 379 - SR 56 WEST OF CEDAR CITY**	**1,465**	**1,400**	**1,620**
381	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 130**	**540**	**580**	**440**
	0.62	2.29	1.67		NORTH URBAN BOUNDARY	540	580	440
	2.29	3.25	0.96		WEST INCORPORATED LIMITS ENOCH	735	700	810
	3.25	7.91	4.66		JCT. FAS 382 EAST OF ENOCH - FAI 15 SUMMIT INTERCHANGE	600	570	660
382	**0.00**	**1.47**	**1.47**	*	**JUNCTION SR 56**	**3,790**	**3,630**	**4,190**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
382	1.47	5.50	4.03		JUNCTION ROAD TO AIRPORT	3,530	3,380	3,900
	5.50	8.49	2.99		JUNCTION LOCAL ROAD TO LUND	3,220	3,080	3,560
	8.49	10.65	2.16		JUNCTION SR 130 - JUNCTION FAS 381	1,815	1,740	2,010
390	**0.00**	**3.97**	**3.97**	*	**JUNCTION FAI 15**	**195**	**190**	**220**
	3.97	4.87	0.90		SOUTH INCORPORATED LIMITS KANARRAVILLE	500	480	550
	4.87	9.01	4.14		NORTH INCORPORATED LIMITS KANARRAVILLE - FAI 15	655	630	720
392	**31.39**	**38.27**	**6.88**	*	**JUNCTION SR 12**	**370**	**350**	**410**
	38.27	39.49	1.22		TEASDALE - SR 24 WEST OF TORREY	370	350	410
403	**0.00**	**14.46**	**14.46**	*	**ARIZONA - UTAH STATE LINE**	**65**	**60**	**70**
	14.46	19.96	5.50		LOCAL ROAD WHITE MESA MOUNTAIN - SR 262 N.W. TO ANETH	690	660	760
404	**0.00**	**12.95**	**12.95**	*	**JUNCTION SR 262 ANETH - UTAH - COLORADO STATE LINE**	**660**	**630**	**730**
405	**0.00**	**18.29**	**18.29**	*	**JUNCTION SR 666 EAST OF MONTICELLO**	**180**	**170**	**200**
	18.29	42.84	24.55		SUMMIT POINT - SR 46 WEST OF LA SAL	155	150	170
415	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 212**	**10,500**	**11,310**	**8,470**
	1.50	2.74	1.24		APPROXIMATELY 1200 SOUTH IN WASHINGTON	7,640	7,320	8,440
	2.74	4.53	1.79		SOUTH INCORPORATED LIMITS WASHINGTON	7,640	7,320	8,440
	4.53	5.21	0.68		EAST URBAN BOUNDARY	6,965	6,800	7,390
	5.21	7.50	2.29		EAST INCORPORATED LIMITS ST. GEORGE	6,180	6,030	6,550
416	**2.43**	**4.58**	**2.15**	*	**JUNCTION FAU 4002 SANTA CLARA**	**15,280**	**14,640**	**16,890**
	4.58	10.92	6.34		NORTH INCORPORATED LIMITS SANTA CLARA	5,955	5,700	6,580
	10.92	26.49	15.57		SHIVWITS-SR 18 AT VEYO	845	810	930
502	**0.00**	**0.15**	**0.15**	*	**EAST BOUND OFF RAMP FROM FAI 84**	**860**	**820**	**950**
	0.15	0.38	0.23		SOUTH INCORPORATED LIMITS SNOWVILLE	585	560	650
	0.38	1.57	1.19		JUNCTION FAS 526 IN SNOWVILLE	1,180	1,130	1,300
	1.57	2.71	1.14		NORTH INC. LIMITS SNOWVILLE - UTAH - IDAHO STATE LINE	1,115	1,070	1,230
504	**0.00**	**1.11**	**1.11**	*	**GOLDEN SPIKE MONUMENT**	**225**	**220**	**250**
	1.11	5.75	4.64		PROMONTORY JUNCTION	730	700	810
	5.75	7.80	2.05		LOCAL ROAD TO PROMONTORY POINT-SR 83 LAMPO JUNCTION	1,230	1,180	1,360
506	**0.00**	**3.75**	**3.75**	*	**JUNCTION SR 82 EAST OF GARLAND - JUNCTION SR 30**	**2,585**	**2,480**	**2,860**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
506	3.75	4.33	0.58		JUNCTION SR 81 IN FIELDING	745	710	820
	4.33	5.25	0.92		WEST INCORPORATED LIMITS FIELDING - SR 13	720	690	800
510	**0.00**	**2.67**	**2.67**	*	**JUNCTION SR 13**	**535**	**510**	**590**
	2.67	6.70	4.03		JUNCTION FAS 524	880	840	970
	6.70	8.61	1.91		JUNCTION FAS 512	2,125	2,040	2,350
	8.61	8.71	0.10		SOUTH INCORPORATED LIMITS TREMONTON - SR 102	1,930	1,850	2,130
	8.71	9.72	1.01		JUNCTION SR 102 - 10TH NORTH (FAS-610)	730	700	810
512	**0.00**	**2.00**	**2.00**	*	**JUNCTION SR 102 WEST OF TREMONTON**	**650**	**620**	**720**
	2.00	4.00	2.00		JUNCTION LOCAL ROAD	370	350	410
	4.00	4.98	0.98		JUNCTION FAS 510	255	240	280
	4.98	6.18	1.20		WEST INCORPORATED LIMITS ELWOOD - SR 13 IN ELWOOD	300	290	330
514	**0.00**	**1.66**	**1.66**	*	**JUNCTION SR 13 - SOUTHBOUND RAMP FAI 15**	**1,215**	**1,160**	**1,340**
523	**0.00**	**12.63**	**12.63**	*	**BEAR RIVER BIRD REFUGE**	**820**	**790**	**810**
	12.63	14.43	1.80		BRIGHAM CITY WEST URBAN BOUNDARY-JUNCTION FAU 9002	1,060	1,140	850
524	**0.00**	**4.00**	**4.00**	*	**JUNCTION SR 83-FAS 510 WEST OF ELWOOD**	**790**	**760**	**870**
526	**0.00**	**1.66**	**1.66**	*	**JUNCTION FAI 84**	**740**	**710**	**820**
	1.66	2.46	0.80		WEST INCORPORATED LIMITS SNOWVILLE-FAS 502	765	730	850
538	**0.00**	**4.72**	**4.72**	*	**JUNCTION SR 23**	**1,360**	**1,300**	**1,500**
	4.72	5.46	0.74		BENSON	2,330	2,230	2,570
	5.46	6.65	1.19		JUNCTION LOCAL ROAD AT BENSON	3,870	3,710	4,280
	6.65	7.87	1.22		WEST URBANIZED BOUNDARY	3,870	3,710	4,280
	7.87	8.80	0.93		JUNCTION LOCAL ROAD AIRPORT-SR 91 NORTH OF LOGAN	4,015	4,330	3,240
540	**0.00**	**2.54**	**2.54**	*	**AVON**	**685**	**660**	**760**
	2.54	2.91	0.37		SOUTH INCORPORATED LIMITS PARADISE-SR 165 PARADISE	1,355	1,300	1,500
544	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 91**	**1,660**	**1,790**	**1,340**
	1.00	2.57	1.57		WEST INCORPORATED LIMITS NIBLEY-SR 165 IN NIBLEY	2,355	2,540	1,900
545	**0.00**	**4.97**	**4.97**	*	**JUNCTION SR 91**	**1,735**	**1,660**	**1,920**
	4.97	5.36	0.39		SOUTH INCORPORATED LIMITS HYRUM-SR 101 IN HYRUM	2,465	2,360	2,720
553	**4.14**	**5.53**	**1.39**	*	**NORTHWEST URBAN BOUNDARY LOGAN - JUNCTION FAS 538**	**7,850**	**8,460**	**6,330**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
557	**0.00**	**13.09**	**13.09**	*	**JCT. SR 30 NORTH OF LAKETOWN - UTAH - IDAHO STATE LINE**	**390**	**370**	**430**
566	**0.00**	**0.57**	**0.57**	*	**PINEVIEW RESERVOIR**	**775**	**740**	**860**
567	**0.00**	**0.50**	**0.50**	*	**LITTLE MOUNTAIN**	**900**	**860**	**990**
	0.50	4.00	3.50		ROAD TO INDUSTRIAL AREA	2,500	2,390	2,760
	4.00	7.01	3.01		WEST WARREN - SR 134	4,095	3,920	4,530
569	**0.00**	**0.21**	**0.21**	*	**OGDEN URBAN BOUNDARY**	**1,435**	**1,370**	**1,590**
	0.21	5.48	5.27		JUNCTION HARRISON BOULEVARD	1,365	1,310	1,510
	5.48	6.62	1.14		JUNCTION LOCAL ROAD IN LIBERTY	790	760	870
	6.62	8.31	1.69		END OF CONSTRUCTION SECTION- JUNCTION SR 158	1,865	1,790	2,060
	8.32	9.16	0.84	*	JUNCTION SR 158 NORTHWEST OF EDEN	940	900	1,040
	9.16	9.73	0.57		JUNCTION FAS 570 - JUNCTION SR 158	970	930	1,070
570	**0.00**	**5.11**	**5.11**	*	**JUNCTION SR 39 EAST OF HUNTSVILLE - JUNCTION FAS 569**	**1,165**	**1,120**	**1,290**
591	**0.00**	**0.75**	**0.75**	*	**JUNCTION SR 66 IN MORGAN**	**1,165**	**1,120**	**1,290**
	0.75	7.97	7.22		WEST INCORPORATED LIMITS MORGAN	855	820	940
	7.97	8.87	0.90		PETERSON	1,670	1,600	1,850
	8.87	11.43	2.56		PETERSON STATION FAI 84 - JUNCTION SR 167	990	950	1,090
595	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 104**	**1,105**	**1,060**	**1,220**
	0.23	0.44	0.21	*	UNCONSTRUCTED	NA	NA	NA
	0.44	1.08	0.64	*	BEGINNING OF CONSTRUCTION	600	570	660
	1.08	2.62	1.54		JUNCTION SR 39	4,730	4,620	5,020
	2.62	4.25	1.63		JUNCTION LOCAL ROAD	4,775	4,660	5,060
	4.25	5.52	1.27		NORTH INCORPORATED LIMITS HARRISVILLE-SR 134	4,735	4,620	5,020
596	**0.00**	**16.15**	**16.15**	*	**JUNCTION SR 89 EAST OF KANAB**	**125**	**120**	**140**
	16.15	23.46	7.31		GRAVEL ROAD RIGHT TO CANNONVILLE	60	60	70
	23.46	34.69	11.23		GRAVEL ROAD LEFT TO GLENDALE	60	60	70
	34.69	35.34	0.65		EAST INCORPORATED LIMITS ALTON	165	160	180
	35.34	39.06	3.72		NORTH INCORPORATED LIMITS ALTON - SR 89	130	120	140
597	**0.00**	**1.87**	**1.87**	*	**JUNCTION DEVIL SLIDE INTERCHANGE FAI 84**	**875**	**840**	**970**
	1.87	12.80	10.93		JUNCTION ROAD TO CROYDON - LOST CREEK RESEVOIR	370	350	410

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
598	**0.00**	**5.65**	**5.65**	*	**PROPOSED ROAD**	**NA**	**NA**	**NA**
	5.65	6.30	0.65	*	JUNCTION SR 6 BEGIN CONSTRUCTION- FAS 298	760	730	840
601	**4.85**	**5.60**	**0.75**	*	**NORTH URBAN BOUNDARY - SR 92**	**4,525**	**4,880**	**3,650**
602	**7.20**	**10.93**	**3.73**	*	**JUNCTION SR 118 - JUNCTION SR 258**	**3,490**	**3,760**	**2,820**
603	**0.00**	**2.52**	**2.52**	*	**SOUTH SIDE SUMMIT INTERCHANGE**	**4,365**	**4,180**	**4,820**
	2.52	4.89	2.37		JEREMY RANCH INTERCHANGE	4,400	4,210	4,860
	4.89	5.10	0.21		KIMBALL JUNCTION	2,320	2,220	2,560
	5.10	5.70	0.60	*	UNCONSTRUCTED PORTION	NA	NA	NA
	5.70	7.87	2.17	*	BEGIN CONSTRUCTION PORTION - JUNCTION SR 40	1,525	1,460	1,690
604	**0.00**	**2.40**	**2.40**	*	**JEREMY RANCH INTERCHANGE-KIMBALL JUNCTION**	**3,130**	**3,000**	**3,460**
606	**0.00**	**6.43**	**6.43**	*	**SR 153 - NORTH CREEK COMMUNITY NORTHEAST OF BEAVER**	**360**	**390**	**290**
607	**0.00**	**3.50**	**3.50**	*	**FAS 357-FAS 606 NORTHEAST OF BEAVER**	**85**	**90**	**70**
609	**0.00**	**30.97**	**30.97**	*	**JUNCTION SR 9**	**35**	**30**	**40**
	30.97	37.93	6.96		FOREST BOUNDARY - JUNCTION SR 14	35	30	40
610	**1.90**	**2.58**	**0.68**	*	**JUNCTION FAI 15**	**2,240**	**2,150**	**2,480**
	2.58	3.55	0.97		1000 WEST - JUNCTION SR 82 IN GARLAND	2,240	2,150	2,480
613	**0.00**	**0.48**	**0.48**	*	**JUNCTION SR 164 VIA 1800 WEST**	**70**	**70**	**80**
	0.48	2.63	2.15	*	UNCONSTRUCTED	NA	NA	NA
	2.63	3.39	0.76	*	JUNCTION SR 6 VIA 1700 WEST	135	130	150
	3.39	3.59	0.20	*	UNCONSTRUCTED	NA	NA	NA
	3.59	4.08	0.49	*	CONSTRUCTED VIA 1600 WEST	135	130	150
	4.08	5.83	1.75	*	UNCONSTRUCTED	NA	NA	NA
	5.83	9.47	3.64	*	BEGIN CONSTRUCTION VIA WOODLAND HILLS DRIVE	390	370	430
	9.47	9.82	0.35	*	BEGIN UNCONSTRUCTED - JUNCTION SR 6	390	370	430
615	**0.00**	**10.60**	**10.60**	*	**JUNCTION SR 19 - SWAYS BOTTOM**	**5**	**10**	**0**
1001	**0.00**	**2.34**	**2.34**	*	**JUNCTION SR 48 - URBAN BOUNDARY**	**3,155**	**3,020**	**3,490**
1003	**0.00**	**0.76**	**0.76**	*	**JUNCTION FAI 80**	**135**	**130**	**150**
	0.76	2.90	2.14		BEGIN UNCONSTRUCTED - FAU 1006 NORTH URBAN BOUNDARY	NA	NA	NA
1004	**0.00**	**1.50**	**1.50**	*	**URBANIZED BOUNDARY**	**10,010**	**9,770**	**10,620**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1004	1.50	2.50	0.97		WEST INCORPORATED LIMITS RIVERTON	11,010	10,740	11,680
	2.50	3.48	1.01		2700 WEST STREET VIA 12600 SOUTH - SR 68	15,225	16,270	12,610
	3.49	3.74	0.23	*	JUNCTION SR 71	10,565	11,380	8,520
	3.74	3.85	0.11		900 EAST DRAPER	9,160	9,870	7,390
	3.85	4.41	0.56		12400 SOUTH DRAPER	4,520	4,870	3,640
	4.41	4.90	0.49		1300 EAST	4,520	4,870	3,640
	4.90	5.55	0.67		1565 EAST DRAPER - 2000 EAST VIA 12300 SO	4,535	4,890	3,660
1005	**0.00**	**2.50**	**2.50**	*	**UNCONSTRUCTED**	**NA**	**NA**	**NA**
	2.50	4.98	2.48	*	NORTH TEMPLE UNCONSTRUCTED - 4000 WEST	NA	NA	NA
	4.98	5.38	0.40	*	BEGIN FAU 1005 - 2200 NORTH STREET	4,395	4,210	4,860
	5.38	6.15	0.77	*	JUNCTION 2200 NORTH - FAU 1006 UNCONSTRUCTED	NA	NA	NA
1006	**0.00**	**3.50**	**3.50**	*	**FAU 1012 - 6200 SOUTH UNCONSTRUCTED**	**NA**	**NA**	**NA**
	3.51	4.29	0.78	*	JUNCTION FAI 80 VIA EDDIE RICKENBAKER DRIVE	2,620	2,510	2,900
	4.29	8.58	4.19	*	BEGIN UNCONSTRUCTED - FAU 1006	NA	NA	NA
	8.58	13.53	4.95	*	JUNCTION FAU 1006 - FAU 1011 UNCONSTRUCTED	NA	NA	NA
	13.53	18.53	5.00	*	JCT. FAU 1006 UNCONSTRUCTED - NORTH URBAN BOUNDARY	NA	NA	NA
1007	**0.00**	**1.40**	**1.40**	*	**JUNCTION FAU 1089 UNCONSTRUCTED**	**NA**	**NA**	**NA**
	1.40	3.20	1.80	*	BEGIN CONSTRUCTED - FAU 1003	1,280	1,380	1,030
1008	**0.00**	**0.45**	**0.45**	*	**JUNCTION BANGERTER HIGHWAY UNCONSTRUCTED**	**NA**	**NA**	**NA**
	0.45	0.95	0.50	*	BEGIN CONSTRUCTED	7,780	8,380	6,270
	0.95	1.95	1.00		JUNCTION 2700 WEST VIA 10400 SOUTH - REDWOOD ROAD	16,730	18,030	13,490
	1.96	2.28	0.32	*	JUNCTION FAI 15	31,715	34,170	25,570
	2.28	2.81	0.53		STATE STREET VIA 10600 SOUTH STREET	26,715	28,790	21,540
	2.81	3.26	0.45		WEST INCORPORATED LIMITS SANDY	25,900	27,910	20,880
	3.26	3.75	0.51		JUNCTION SR 71 700 EAST STREET	25,775	27,770	20,780
	3.75	4.27	0.50		1000 EAST IN SANDY	22,850	24,620	18,420
	4.27	4.91	0.53		1300 EAST	26,305	28,340	21,210
	4.91	5.31	0.51		1700 EAST - 2000 EAST	8,180	8,810	6,590
1009	**0.00**	**0.75**	**0.75**	*	**14400 SOUTH STREET**	**1,415**	**1,380**	**1,500**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1009	0.75	2.26	1.51		SOUTH INCORPORATED LIMITS RIVERTON	2,015	1,970	2,140
	2.26	6.74	4.48		12600 SOUTH STREET SR 71 VIA 2700 WEST STREET	7,135	6,960	7,570
	6.74	8.24	1.50		9000 SOUTH	13,250	14,280	10,680
	8.24	9.74	1.50		7800 SOUTH STREET SR 48	15,280	16,460	12,320
	9.74	11.24	1.50		NORTH INCORPORATED LIMITS WEST JORDAN	15,280	16,460	12,320
	11.24	12.23	0.99		5400 SOUTH STREET SR 173	18,305	19,720	14,760
	12.23	13.21	0.98		4700 SOUTH STREET	21,060	22,690	16,980
	13.21	14.21	1.00		4100 SOUTH WEST VALLEY VIA 2700 WEST	20,785	22,400	16,760
	14.21	14.70	0.49		3500 SOUTH STREET SR 171	17,445	17,020	18,500
	14.70	16.12	1.42		3100 SOUTH - 2100 SOUTH END OF ROUTE	15,375	15,000	16,310
	16.12	16.24	0.12	*	BEGIN UNCONSTRUCTED	NA	NA	NA
	16.24	17.78	1.54	*	BEGIN ROUTE NORTH SIDE 2100 SOUTH VIA 2700 WEST	11,985	11,480	13,250
	17.78	17.98	0.20		JUNCTION 900 SOUTH	11,985	11,480	13,250
	17.98	18.47	0.49		BEGIN UNCONSTRUCTED - FAU 1050	11,215	12,080	9,050
1010	**0.00**	**0.91**	**0.91**	*	**STATE STREET**	**17,445**	**18,800**	**14,060**
	0.91	1.19	0.28		VINE STREET VIA 5600 SOUTH	17,275	18,610	13,930
	1.19	1.79	0.60		900 EAST IN MURRAY	15,560	16,770	12,540
	1.79	2.12	0.33		1300 EAST STREET	13,850	14,920	11,170
	2.12	2.82	0.70		VAN WINKLE EXPRESSWAY - HIGHLAND DRIVE	6,840	7,370	5,510
1011	**0.00**	**0.35**	**0.35**	*	**JUNCTION FAU 1076 - FAU 1006 VIA 1700 WEST UNCONSTRUCTED**	**NA**	**NA**	**NA**
1012	**0.00**	**2.30**	**2.30**	*	**SR 48 WEST JORDAN UNCONSTRUCTED**	**18,640**	**20,080**	**15,040**
	2.30	3.15	0.85	*	PROVO CANAL	21,560	23,040	17,860
	3.15	4.05	0.90		BANGERTER HIGHWAY CONNECTION	21,560	23,040	17,860
	4.05	5.03	0.98		2700 WEST VIA 9000 SOUTH - REDWOOD ROAD	21,560	23,040	17,860
1013	**0.00**	**2.57**	**2.57**	*	**JUNCTION SR 71 12600 SOUTH**	**4,595**	**4,480**	**4,870**
	2.57	2.76	0.19	*	JUNCTION 10400 SO - 10600 SO VIA 1300 WEST	7,700	7,510	8,170
	2.76	4.46	1.70		JUNCTION 10400 SOUTH VIA 1300 WEST	7,700	7,510	8,170
	4.46	6.96	2.50		9000 SOUTH - 7000 SOUTH STREET	10,155	9,910	10,770
	6.96	7.38	0.42	*	JUNCTION 7000 SOUTH STREET	8,715	8,500	9,240

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1013	7.38	9.05	1.67		6400 SOUTH STREET - 5400 SOUTH	4,975	4,850	5,280
1014	**0.00**	**0.36**	**0.36**	*	**JUNCTION SR 48**	**16,210**	**17,470**	**13,070**
	0.36	1.16	0.80		FAI 15 VIA 7800 SOUTH	15,050	16,220	12,130
	1.16	2.13	0.97		STATE STREET	11,015	10,750	11,680
	2.13	3.13	1.00		700 EAST STREET - 1300 EAST	9,330	9,100	9,890
1015	**0.00**	**1.73**	**1.73**	*	**JUNCTION 10600 SOUTH**	**NA**	**NA**	**NA**
	1.73	1.96	0.23	*	BEGIN CONSTRUCTED	1,480	1,440	1,570
	1.96	3.89	1.93		JUNCTION 9000 SOUTH - SR 48 VIA 700 WEST	10,055	9,810	10,660
	3.90	4.40	0.50	*	7200 SOUTH STREET VIA 700 WEST	8,555	8,350	9,070
	4.40	4.65	0.25		NORTH INCORPORATED LIMITS MIDVALE VIA 700 WEST	9,345	9,120	9,910
	4.65	6.16	1.51		6400 SOUTH STREET VIA 700 WEST	13,230	12,910	14,030
	6.16	6.69	0.53		5300 SOUTH STREET	22,335	21,790	23,690
	6.69	7.12	0.43		VINE STREET	23,060	22,500	24,450
	7.12	7.62	0.50		4800 SOUTH	13,170	12,850	13,970
	7.62	8.67	1.05		JUNCTION 4500 SOUTH - 3720 SOUTH VIA 700 WEST	9,965	9,720	10,570
	8.67	9.37	0.70	*	JUNCTION 3720 SOUTH UNCONSTRUCTED	NA	NA	NA
	9.37	9.62	0.25	*	BEGIN CONSTRUCTED	595	680	630
	9.62	11.40	1.78		JUNCTION 3300 SOUTH STREET VIA 900 WEST	16,790	16,380	17,810
	11.40	11.92	0.52		2100 SOUTH VIA 900 WEST STREET IN SALT LAKE CITY	20,380	19,890	21,610
	11.92	12.39	0.47		1700 SOUTH VIA 900 WEST STREET IN SALT LAKE CITY	20,380	19,890	21,610
	12.39	13.17	0.78		CALIFORNIA AVENUE VIA 900 WEST IN SALT LAKE CITY	16,820	16,410	17,840
	13.17	13.77	0.60		800 SOUTH STREET VIA 900 WEST IN SALT LAKE CITY	18,515	18,070	19,630
	13.77	14.51	0.74		400 SOUTH STREET VIA 900 WEST	16,065	15,680	17,040
	14.51	15.26	0.75		NORTH TEMPLE STREET IN SALT LAKE CITY	13,125	12,810	13,290
	15.26	15.86	0.60		600 NORTH STREET - 1000 NORTH STREET VIA 900 WEST	13,665	13,330	14,490
1016	**0.00**	**0.69**	**0.69**	*	**JUNCTION 2000 EAST**	**23,445**	**25,260**	**18,900**
	0.69	2.31	1.62		2425 EAST VIA 7800 SOUTH - WASATCH BOULEVARD	11,415	12,300	9,200
1017	**0.00**	**0.82**	**0.82**	*	**5900 SOUTH FAU 1022 VIA 300 WEST**	**5,330**	**5,200**	**5,650**
	0.82	1.71	0.89		5300 SOUTH SR 173 VIA 300 WEST	7,575	7,390	8,030

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1017	1.71	2.21	0.50		4800 SOUTH FAU 1026 VIA 300 WEST	5,460	5,330	5,790
	2.21	3.14	0.93		4500 SOUTH SR 266 - 3900 SOUTH	10,425	10,170	11,060
	3.15	4.18	1.03		JUNCTION 3900 SOUTH	8,320	8,120	8,820
	4.18	5.03	0.85		3300 SOUTH VIA 300 WEST	16,230	17,490	13,080
	5.03	5.89	0.86		2700 SOUTH IN SOUTH SALT LAKE VIA 300 WEST	16,190	17,440	13,050
	5.89	6.44	0.55		2100 SOUTH IN SOUTH SALT LAKE	16,835	18,140	13,570
	6.44	7.00	0.56		1700 SOUTH IN SALT LAKE CITY VIA 300 WEST	15,495	16,700	12,490
	7.00	7.71	0.71		1300 SOUTH	12,285	13,240	9,900
	7.71	8.16	0.45		800 SOUTH STREET VIA 300 WEST	17,010	18,330	13,710
	8.16	8.31	0.15		500 SOUTH STREET - 400 SOUTH STREET	21,290	22,940	171,600
1018	**0.00**	**1.30**	**1.30**	*	**STATE STREET**	**21,095**	**22,730**	**17,010**
	1.30	1.67	0.37		900 EAST VIA 7200 SOUTH	29,945	32,270	24,140
	1.67	1.97	0.30		UNION PARK AVENUE 1100 EAST VIA 7200 SOUTH	25,050	26,990	20,200
	1.97	3.06	1.09		1300 EAST STREET	21,960	23,660	17,700
	3.06	4.07	1.01		JUNCTION 2000 EAST VIA 7000 SOUTH	24,825	26,750	20,010
	4.07	4.53	0.46		2700 EAST VIA 7000 SOUTH STREET	13,620	14,680	10,980
	4.53	5.49	0.96		3050 EAST - WASATCH BOULEVARD	9,865	10,630	7,950
1019	**0.00**	**1.74**	**1.74**	*	**JUNCTION 6400 SOUTH STREET VIA RIVERSIDE DRIVE**	**1,155**	**1,130**	**1,220**
	1.74	2.73	0.99		JUNCTION 5400 SOUTH - JUNCTION 300 WEST	990	970	1,050
1020	**0.00**	**0.50**	**0.50**	*	**REDWOOD ROAD UNCONSTRUCTED**	**NA**	**NA**	**NA**
	0.50	0.81	0.31	*	1300 WEST VIA 6400 SOUTH	15,470	15,100	16,410
	0.81	1.49	0.68		WEST INCORPORATED LIMITS MURRAY	15,470	15,100	16,410
	1.49	2.59	1.10		700 WEST STREET FAU 1015	18,260	17,820	19,360
	2.59	2.91	0.32		JUNCTION STATE STREET SR 89 VIA 6400 SOUTH	21,920	23,620	17,670
	2.91	3.50	0.59		JUNCTION 280 EAST ON / OFF RAMPS SR 215	15,640	16,850	12,610
	3.50	3.83	0.33		725 EAST	12,610	13,590	10,170
	3.83	4.42	0.59		900 EAST STREET SR 71 - 1300 EAST STREET	9,110	9,820	7,340
1022	**0.00**	**2.00**	**2.00**	*	**JUNCTION 5600 WEST VIA 6200 SOUTH STREET**	**17,060**	**18,380**	**13,750**
	2.00	3.50	1.50		4000 WEST STREET	22,420	24,160	18,080

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1022	3.50	4.51	1.01		2700 WEST STREET - REDWOOD ROAD VIA 6200 SOUTH	22,230	23,950	17,920
	4.52	5.02	0.50	*	REDWOOD ROAD - 1300 WEST STREET	11,575	11,290	12,280
	5.02	6.14	1.12	*	JUNCTION 700 WEST - STATE STREET	7,385	7,210	7,830
	6.14	7.35	1.21	*	STATE STREET	12,730	12,420	13,500
	7.35	7.98	0.63		900 EAST	11,425	11,150	12,120
	7.98	9.12	1.14		1300 EAST	11,230	10,960	11,910
	9.12	10.33	1.21		VAN WINKLE EXPRESSWAY VIA 6100 SOUTH	12,455	12,150	13,210
	10.33	10.44	0.11		KNUDSEN CORNER VIA 6200 SOUTH - FAI 215	13,360	14,400	10,770
1023	**0.00**	**0.66**	**0.66**	*	**JUNCTION ORCHARD DRIVE**	**2,680**	**2,620**	**2,840**
	0.66	1.29	0.63		JUNCTION SR 89	8,735	8,520	9,260
	1.29	2.03	0.74		FIVE POINTS 1500 SOUTH	11,090	10,820	11,760
	2.03	2.38	0.35		500 SOUTH VIA MAIN STREET	12,165	11,870	12,900
	2.38	2.67	0.29		CENTER STREET VIA MAIN STREET - 400 NORTH VIA MAIN	12,165	11,870	12,900
1024	**0.00**	**0.78**	**0.78**	*	**STATE STREET SR 89**	**13,470**	**14,510**	**10,860**
	0.78	1.26	0.48		VINE STREET IN MURRAY VIA 5300 SOUTH	16,350	17,620	13,180
	1.26	1.80	0.54		5600 SOUTH VIA VINE - 900 EAST	8,215	8,020	8,710
1026	**0.00**	**2.70**	**2.70**	*	**JUNCTION REDWOOD ROAD**	**10,080**	**9,840**	**10,690**
	2.70	3.92	1.22		JUNCTION STATE STREET - SR 71 VANWINKLE EXPRESSWAY	9,390	10,120	7,570
	3.92	4.37	0.44	*	JUNCTION SR 152 - 1300 EAST VIA 4800 SOUTH STREET	12,125	13,060	9,780
	4.37	5.20	0.84		1300 EAST STREET	13,425	14,470	10,820
	5.20	6.03	0.83		HIGHLAND DRIVE VIA 4800 SOUTH - 2300 EAST	20,450	22,040	16,490
1027	**0.00**	**0.62**	**0.62**	*	**JUNCTION SR 89**	**8,465**	**8,260**	**8,980**
	0.62	2.28	1.66		NORTH INCORPORATED LIMITS NORTH SALT LAKE	13,400	14,440	10,800
	2.28	2.47	0.19		JUNCTION 2600 SOUTH STREET FAU 1074 VIA ORCHARD DRIVE	11,285	12,160	9,100
	2.47	3.39	0.92		SOUTH INCORPORATED LIMITS BOUNTIFUL	11,490	12,380	9,260
	3.39	3.81	0.42		1500 SOUTH STREET	13,005	14,010	10,480
	3.81	4.06	0.25		MILL STREET	17,965	19,360	14,480
	4.06	4.71	0.65		500 SOUTH STREET	10,865	11,710	8,760
	4.71	5.54	0.83		400 NORTH STREET VIA 400 EAST	14,710	14,350	15,600

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1027	5.54	5.59	0.05		NORTH INCORPORATED LIMITS BOUNTIFUL	11,710	11,430	12,420
	5.59	6.05	0.46		PAGES LANE 1000 SOUTH STREET	10,055	9,810	10,660
	6.05	7.17	1.12		PORTER LANE 400 SOUTH STREET	9,065	8,850	9,610
	7.17	7.42	0.25		CHASE LANE 1000 NORTH STREET - SR 106	9,065	8,850	9,610
1028	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5600 WEST VIA 4700 SOUTH**	**9,645**	**10,310**	**7,990**
	1.00	2.01	1.01		4800 WEST	24,965	26,680	20,680
	2.01	2.24	0.23		4000 WEST	24,965	26,680	20,680
	2.24	2.52	0.28		JUNCTION BANGERTER HIGHWAY	30,800	32,920	25,510
	2.52	3.02	0.50		3600 WEST VIA 4700 SOUTH	37,790	40,390	31,300
	3.02	3.51	0.49		3200 WEST STREET	38,920	41,590	32,230
	3.51	3.74	0.23		2700 WEST EAST INC. LIMITS WEST VALLEY CITY - FAI 215	41,650	44,510	34,490
1029	**0.00**	**0.38**	**0.38**	*	**JUNCTION CENTER STREET FAU 1072**	**1,545**	**1,510**	**1,640**
	0.38	0.80	0.42		UNCONSTRUCTED	NA	NA	NA
	0.80	1.28	0.48	*	CONSTRUCTED	1,120	1,090	1,190
	1.28	1.43	0.15		UNCONSTRUCTED	NA	NA	NA
	1.43	1.81	0.38	*	CONSTRUCTED	1,260	1,230	1,340
	1.81	3.74	1.90		SOUTH INC. LIMITS BOUNTIFUL VIA DAVIS BOULEVARD	1,255	1,220	1,330
	3.74	4.41	0.70		500 SOUTH STREET - 400 NORTH STREET	1,235	1,210	1,310
1030	**0.00**	**0.50**	**0.50**	*	**JUNCTION SR 111 VIA 4100 SOUTH**	**4,205**	**4,530**	**3,390**
	0.50	1.50	1.00		JUNCTION 8000 WEST	5,035	5,430	4,060
	1.50	2.50	1.00		JUNCTION 7200 WEST	7,375	7,950	5,950
	2.50	3.51	1.01		6400 WEST	15,420	16,620	12,430
	3.51	4.51	1.00		5600 WEST	16,955	18,270	13,670
	4.51	5.50	0.99		4800 WEST VIA 4100 SOUTH	16,050	17,290	12,940
	5.50	5.66	0.16		4000 WEST	27,580	29,720	22,240
	5.66	7.00	1.34		BANGERTER HIGHWAY	27,580	29,720	22,240
	7.00	8.01	1.01		2700 WEST	28,275	30,470	22,800
	8.01	8.93	0.92		REDWOOD ROAD	30,135	32,470	24,300
	8.93	10.01	1.08		JORDAN RIVER BRIDGE EAST INC. LIMITS WEST VALLEY CITY	30,135	32,470	24,300

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1030	10.01	10.72	0.71		300 WEST	29,655	31,950	23,910
	10.72	11.60	0.88		STATE STREET SR 89 VIA 3900 SOUTH	28,570	30,780	23,030
	11.60	11.90	0.30		700 EAST STREET SR 71 VIA 3900 SOUTH	24,170	26,040	19,490
	11.90	12.51	0.61		900 EAST	23,660	25,490	19,080
	12.51	12.97	0.46		1300 EAST STREET SR 181 VIA 3900 SOUTH	20,615	22,210	16,620
	12.97	14.06	1.09		HIGHLAND DRIVE	15,000	16,160	12,090
	14.06	15.58	1.52		2300 EAST SR 195 - WASATCH BOULEVARD	12,615	13,590	10,170
1031	**0.00**	**0.29**	**0.29**	*	**400 SOUTH STREET**	**32,420**	**34,930**	**26,140**
	0.29	0.71	0.42		200 SOUTH - NORTH TEMPLE STREET VIA WEST TEMPLE	23,020	24,800	18,560
1034	**0.00**	**0.59**	**0.59**	*	**300 WEST**	**8,040**	**7,850**	**8,530**
	0.59	1.18	0.59		STATE STREET VIA 2700 SOUTH	10,555	10,300	11,190
	1.18	1.49	0.31		500 EAST STREET	13,500	13,170	14,320
	1.49	1.79	0.30		700 EAST STREET VIA 2700 SOUTH	12,495	12,190	13,250
	1.79	2.42	0.63		900 EAST STREET VIA 2700 SOUTH	12,710	12,400	13,480
	2.42	3.01	0.59		1300 EAST STREET	11,115	10,850	11,790
	3.01	3.44	0.43		1700 EAST STREET - 2000 EAST STREET	8,330	8,130	8,830
1035	**0.00**	**0.15**	**0.15**	*	**SOUTH TEMPLE**	**2,315**	**2,260**	**2,460**
	0.15	0.62	0.47		2ND AVENUE VIA B STREET	8,805	8,590	9,340
	0.62	0.86	0.24		8TH AVENUE VIA B STREET - 11TH AVENUE	2,135	2,080	2,260
1036	**0.00**	**0.87**	**0.87**	*	**JUNCTION 4500 SOUTH SR 266**	**6,400**	**6,250**	**6,790**
	0.87	1.72	0.85		3900 SOUTH STREET VIA MAIN STREET	12,600	12,300	13,360
	1.72	2.59	0.87		3300 SOUTH STREET VIA MAIN STREET	13,110	12,790	13,900
	2.59	3.48	0.89		2700 SOUTH STREET VIA MAIN STREET	14,480	14,130	15,360
	3.48	4.04	0.56		2100 SOUTH STREET VIA MAIN STREET	14,120	13,780	14,970
	4.04	4.59	0.55		1700 SOUTH STREET VIA MAIN STREET	13,140	12,820	13,930
	4.59	5.89	1.30		1300 SOUTH STREET VIA MAIN STREET	16,495	16,100	17,490
	5.89	6.49	0.60		400 SOUTH STREET VIA MAIN STREET	15,200	14,830	16,120
	6.49	6.94	0.45		SOUTH TEMPLE STREET - 200 NORTH STREET	14,415	14,070	15,290
1037	**0.00**	**0.87**	**0.87**	*	**JUNCTION 4500 SOUTH STREET**	**7,560**	**7,380**	**8,020**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1037	0.87	1.75	0.88		3900 SOUTH STREET VIA 500 EAST	7,230	7,060	7,670
	1.75	2.12	0.37		3300 SOUTH STREET VIA 500 EAST	5,830	5,690	6,180
	2.12	2.63	0.51		SOUTH INCORPORATED LIMITS SALT LAKE CITY	5,645	5,510	5,990
	2.63	3.52	0.89		2700 SOUTH STREET VIA 500 EAST	5,245	5,120	5,560
	3.52	4.07	0.55		2100 SOUTH STREET VIA 500 EAST	6,585	6,430	6,980
	4.07	4.63	0.56		1700 SOUTH STREET VIA 500 EAST	6,390	6,240	6,780
	4.63	5.20	0.57		1300 SOUTH STREET VIA 500 EAST	7,060	6,890	7,490
	5.20	5.65	0.45		900 SOUTH STREET VIA 500 EAST	7,200	7,030	7,640
	5.65	5.95	0.30		600 SOUTH STREET VIA 500 EAST	8,805	8,590	9,340
	5.95	6.53	0.58		400 SOUTH STREET VIA 500 EAST	12,950	12,640	13,730
	6.53	7.00	0.47		SOUTH TEMPLE STREET VIA 500 EAST	10,475	10,220	11,110
	7.00	7.15	0.15		6TH AVENUE VIA E STREET	5,710	5,570	6,060
	7.15	7.39	0.24		8TH AVENUE VIA E STREET - 11TH AVENUE	3,190	3,110	3,380
1038	**0.00**	**0.59**	**0.59**	*	**STATE STREET**	**21,455**	**23,120**	**17,300**
	0.59	0.89	0.30		500 EAST VIA 2100 SOUTH IN SALT LAKE CITY	23,295	25,100	18,780
	0.89	1.19	0.30		700 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	25,905	27,910	20,890
	1.19	1.49	0.30		900 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	25,295	27,260	20,390
	1.49	1.80	0.31		1100 EAST STREET VIA 2100 SOUTH STREET	23,350	25,160	18,830
	1.80	2.41	0.61		1300 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	30,150	32,490	24,310
	2.41	3.01	0.60		1700 EAST STREET VIA 2100 SOUTH STREET IN SALT LAKE CITY	21,135	22,770	17,040
	3.01	3.35	0.34		2100 EAST STREET VIA 2100 SOUTH IN SALT LAKE CITY	17,475	18,830	14,090
	3.35	4.43	1.08		2300 EAST - JUNCTION SR 186 VIA PARLEYS WAY	12,255	13,200	9,880
1039	**0.00**	**1.25**	**1.25**	*	**JUNCTION 6400 SOUTH - 5600 SOUTH VIA 280 EAST**	**11,140**	**10,870**	**11,810**
1040	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5600 WEST - 4800 WEST UNCONSTRUCTED**	**NA**	NA	**NA**
	1.00	1.31	0.31	*	JUNCTION 4800 WEST (PROPOSED)	NA	NA	NA
	1.31	3.03	1.72	*	BEGIN CONSTRUCTED PORTION	1,565	1,690	1,260
	3.03	3.58	0.55		UNCONSTRUCTED - 2700 WEST	NA	NA	NA
	3.58	4.57	0.99	*	2700 WEST STREET	10,495	10,240	11,130
	4.57	5.73	1.16		REDWOOD ROAD	12,085	13,020	9,740

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1040	5.73	6.63	0.90		900 WEST STREET VIA 1700 SOUTH STREET	12,455	13,420	10,040
	6.63	7.23	0.60		300 WEST VIA 1700 SOUTH STREET	14,755	15,900	11,900
	7.23	7.82	0.59		STATE STREET VIA 1700 SOUTH STREET	12,325	13,280	9,940
	7.82	8.13	0.31		500 EAST STREET 1700 SOUTH STREET	11,235	12,110	9,060
	8.13	8.43	0.30		700 EAST STREET VIA 1700 SOUTH STREET	14,530	15,660	11,710
	8.43	8.72	0.29		900 EAST STREET VIA 1700 SOUTH STREET	10,270	11,070	8,280
	8.72	9.04	0.32		1100 EAST STREET VIA 1700 SOUTH STREET	8,305	8,950	6,700
	9.04	9.65	0.61		1300 EAST STREET VIA 1700 SOUTH STREET	7,570	7,390	8,030
	9.65	10.25	0.60		1700 EAST STREET VIA 1700 SOUTH STREET	6,555	6,400	6,950
	10.25	10.56	0.31		2100 EAST STREET VIA 1700 SOUTH STREET	7,565	7,380	8,020
	10.56	10.80	0.24		2300 EAST STREET SR 195 - FOOTHILL BOULEVARD	6,780	6,620	7,190
1041	**0.00**	**0.29**	**0.29**	*	**400 SOUTH STREET**	**35,200**	**37,930**	**28,380**
	0.29	0.57	0.28		200 SOUTH VIA 700 EAST IN SALT LAKE CITY	23,195	24,990	18,700
	0.57	1.03	0.46		SOUTH TEMPLE VIA 700 EAST	8,255	8,060	8,750
	1.03	1.42	0.39		6TH AVENUE VIA I STREET - 11TH AVENUE	3,620	3,530	3,840
1042	**2.00**	**3.00**	**1.00**	*	**5600 WEST VIA 1300 SOUTH**	**770**	**740**	**850**
	3.00	5.32	2.32		4800 WEST UNCONSTRUCTED	NA	NA	NA
	5.32	5.49	0.17	*	BEGIN CONSTRUCTED	16,375	15,690	18,100
	5.49	5.97	0.48		2700 WEST IN SALT LAKE CITY	16,475	17,750	13,280
	5.97	6.50	0.53		JUNCTION FAI 215 INTERCHANGE	18,030	19,430	14,540
	6.50	7.65	1.15		REDWOOD ROAD VIA CALIFORNIA AVENUE	25,625	27,610	20,660
	7.65	8.32	0.67		900 WEST STREET VIA CALIFORNIA AVENUE	22,435	24,170	18,090
	8.32	8.56	0.24		JUNCTION FAI 15 VIA 1300 SOUTH STREET	18,145	19,550	14,630
	8.56	9.16	0.60		300 WEST VIA 1300 SOUTH STREET	19,300	20,800	15,560
	9.16	9.76	0.60		STATE STREET VIA 1300 SOUTH STREET	15,690	16,910	12,650
	9.76	10.07	0.31	*	500 EAST VIA 1300 SOUTH STREET	11,225	12,100	9,050
	10.07	10.38	0.31		700 EAST VIA 1300 SOUTH STREET	11,265	12,140	9,080
	10.38	10.68	0.30		900 EAST VIA 1300 SOUTH STREET	10,760	11,590	8,670
	10.68	10.97	0.29		1100 EAST VIA 1300 SOUTH STREET	9,780	10,540	7,880

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1042	10.97	11.59	0.62		1300 EAST VIA 1300 SOUTH STREET	7,975	8,590	6,430
	11.59	12.19	0.60		1700 EAST VIA 1300 SOUTH STREET	7,660	8,250	6,180
	12.19	12.38	0.19		2100 EAST - FOOTHILL BOULEVARD SR 186	8,050	8,670	6,490
1043	**0.00**	**0.58**	**0.58**	*	**JUNCTION VAN WINKLE EXPRESSWAY VIA 900 EAST**	**16,390**	**15,990**	**17,380**
	0.58	1.47	0.89		4500 SOUTH STREET VIA 900 EAST	13,745	13,410	14,580
	1.47	2.35	0.88		3900 SOUTH VIA 900 EAST	13,745	13,410	14,580
	2.35	2.73	0.38		3300 SOUTH STREET VIA 900 EAST	11,675	11,390	12,380
	2.73	3.23	0.50		SOUTH INCORPORATED LIMITS OF SALT LAKE CITY	12,150	11,860	12,880
	3.23	4.11	0.88		2700 SOUTH VIA 900 EAST	12,050	11,760	12,780
	4.11	4.67	0.56		2100 SOUTH STREET VIA 900 EAST	12,050	11,760	12,780
	4.67	5.21	0.54		1700 SOUTH VIA 900 EAST	12,460	12,160	13,210
	5.21	5.78	0.57		1300 SOUTH STREET VIA 900 EAST	15,000	14,640	15,910
	5.78	6.53	0.75		900 SOUTH VIA 900 EAST	14,800	14,440	15,700
	6.53	6.83	0.30		400 SOUTH STREET VIA 900 EAST	18,435	17,990	19,550
	6.83	7.13	0.30		200 SOUTH STREET - SOUTH TEMPLE VIA 900 EAST	10,680	10,420	11,330
1044	**0.00**	**2.55**	**2.55**	*	**JUNCTION 5600 WEST UNCONSTRUCTED**	**NA**	**NA**	**NA**
	2.55	4.59	2.04	*	BEGIN CONSTRUCTED	3,865	4,160	3,120
	4.59	5.76	1.17		REDWOOD ROAD	12,450	12,150	13,200
	5.76	6.66	0.90		900 WEST VIA INDIANA AVENUE	11,395	11,120	12,080
	6.66	6.96	0.30		300 WEST VIA 800 SOUTH IN SALT LAKE CITY	15,750	15,370	16,700
	6.96	7.26	0.30		WEST TEMPLE 800 SOUTH IN SALT LAKE CITY	15,660	16,870	12,630
	7.26	7.87	0.61		STATE STREET VIA 800 SOUTH IN SALT LAKE CITY	13,485	14,530	10,870
	7.87	8.16	0.29		500 EAST STREET VIA 800 SOUTH IN SALT LAKE CITY	14,940	16,100	12,040
	8.16	8.47	0.31		700 EAST VIA 800 SOUTH VIA 800 SOUTH IN SALT LAKE CITY	17,000	18,320	13,710
	8.47	9.06	0.59		900 EAST STREET VIA 800 SOUTH IN SALT LAKE CITY	15,340	16,530	12,370
	9.06	9.54	0.48		1300 EAST VIA 800 SOUTH IN SALT LAKE CITY	15,130	16,300	12,200
	9.54	10.08	0.54		GUARDSMAN WAY VIA SUNNYSIDE AVENUE	16,640	17,930	13,420
	10.08	10.31	0.23		FOOTHILL BLVD APPROXIMATELY 1950 EAST	16,175	17,430	13,040
	10.31	11.92	1.61		2100 EAST VIA SUNNYSIDE AVENUE	14,615	15,750	11,780

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1044	11.92	12.17	0.25		E. INC. LIMITS S.L.C. VIA EMIGRATION CANYON-S.L.URBANBNDRY	2,650	2,860	2,140
1045	**0.00**	**0.40**	**0.40**	*	**JUNCTION STATE STREET-400 NORTH**	**3,265**	**3,190**	**3,460**
1046	**0.00**	**0.59**	**0.59**	*	**STATE STREET**	**20,990**	**22,430**	**17,380**
	0.59	0.89	0.30		500 EAST VIA 600 SOUTH SALT LAKE CITY-700 EAST	15,775	16,860	13,060
	1.78	2.07	0.29		700 EAST STREET	13,965	14,920	11,570
	2.07	2.67	0.60		500 EAST VIA 500 SOUTH-STATE STREET	14,705	15,720	12,180
1047	**3.50**	**3.75**	**0.25**	*	**12400 SOUTH VIA 1300 EAST**	**9,135**	**9,840**	**7,360**
	3.75	4.81	1.06		DRAPER PARKWAY VIA 1300 EAST	11,670	12,570	9,410
	4.81	5.30	0.49		11400 SOUTH VIA 1300 EAST	16,650	17,940	13,420
	5.30	5.80	0.50		11000 SOUTH VIA 1300 EAST	20,610	22,210	16,620
	5.80	7.29	1.49		JUNCTION 10600 SOUTH VIA 1300 EAST	33,815	36,440	27,260
	7.29	8.29	1.00		9400 SOUTH VIA 1300 EAST	37,420	40,320	30,170
	8.29	8.92	0.63		8600 SOUTH STREET IN SANDY	40,450	43,590	32,610
	8.92	9.29	0.37		NORTH INCORPORATED LIMITS SANDY VIA 1300 EAST	40,690	43,840	32,810
	9.29	10.31	1.02		7800 SOUTH STREET VIA 1300 EAST	44,235	47,660	35,660
	10.31	10.61	0.30		UNION PARKWAY VIA 1300 EAST	34,015	36,650	27,420
	10.61	10.98	0.37		7000 SOUTH VIA 1300 EAST	24,275	26,160	19,570
	10.98	11.59	0.61		JUNCTION 6400 SOUTH FAU 1020	24,065	25,930	19,400
	11.59	12.22	0.63		6100 SOUTH STREET FAU 1022 VIA 1300 EAST	19,740	21,270	15,910
	12.22	12.86	0.64		5600 SOUTH STREET-VAN WINKLE SR 152	19,740	21,270	15,910
	12.87	13.30	0.43		500 SOUTH STREET VIA 1300 EAST	21,525	23,190	17,350
	13.30	13.59	0.29		200 SOUTH VIA 1300 EAST	11,910	12,830	9,600
	13.59	14.19	0.60		SOUTH TEMPLE-BONNEVILLE BOULEVARD VIA VIRGINIA	7,525	7,340	7,980
1048	**0.00**	**0.07**	**0.07**	*	**1300 EAST-UNIVERSITY AVENUE**	**21,655**	**21,130**	**22,960**
1049	**0.00**	**0.25**	**0.25**	*	**JUNCTION 12300 SOUTH FAU 1004**	**3,295**	**3,520**	**2,730**
	0.25	1.15	0.90		BEGIN UNCONSTRUCTED PORTION	NA	NA	NA
	1.15	2.21	1.06	*	BEGIN CONSTRUCTED PORTION	4,580	4,890	3,790
	2.21	2.30	0.09		JUNCTION FAU 1008 10600 SOUTH	4,580	4,890	3,790
	2.30	3.90	1.60		BEGIN UNCONSTRUCTED PORTION	NA	NA	NA

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1049	3.90	4.54	0.64	*	9400 SOUTH SANDY	18,365	19,630	15,210
	4.54	6.37	1.83		NEW CASTLE DRIVE 8890 SOUTH VIA HIGHLAND DRIVE	21,925	23,430	18,160
	6.37	6.92	0.55		7800 SOUTH VIA 2000 EAST	22,975	24,550	19,030
	6.92	7.50	0.58		7000 SOUTH- FAI 215 EASTBOUND ON & OFF RAMPS	43,580	46,570	36,090
	7.51	8.14	0.63	*	JUNCTION SR 152 AND 6100 SOUTH	19,810	21,350	15,970
	8.14	9.34	1.20		5600 SOUTH STREET VIA HIGHLAND DRIVE	21,045	22,680	16,970
	9.34	9.93	0.59		JUNCTION FAU 1026 4800 SOUTH VIA HIGHLAND DRIVE	36,725	39,570	29,610
	9.93	10.82	0.89		4500 SOUTH STREET VIA HIGHLAND DRIVE	18,830	20,290	15,180
	10.82	11.75	0.93		3900 SOUTH STREET VIA HIGHLAND DRIVE	20,325	21,900	16,390
	11.75	12.20	0.45		3300 SOUTH STREET VIA HIGHLAND DRIVE	19,530	21,040	15,750
	12.20	12.52	0.32		SOUTH INCORPORATED LIMITS SALT LAKE CITY	19,530	21,040	15,750
	12.52	13.57	1.05		JUNCTION SR 181 VIA 1100 EAST	22,930	22,380	24,320
	13.57	14.13	0.56		2100 SOUTH - 1700 SOUTH STREET VIA 1100 EAST	14,255	13,910	15,120
1050	**0.00**	**2.05**	**2.05**	*	**JUNCTION 5600 WEST**	**900**	**860**	**990**
	2.05	3.89	1.84		JUNCTION BANGERTER HIGHWAY	4,120	4,440	3,320
	3.89	4.69	0.80		2100 WEST STREET UNCONSTRUCTED	NA	NA	NA
	4.69	5.82	1.13	*	REDWOOD ROAD	9,870	10,640	7,960
	5.82	6.73	0.91		900 WEST VIA 400 SOUTH STREET-300 WEST	16,390	17,660	13,210
1051	**0.00**	**0.53**	**0.53**	*	**SUNNYSIDE AVENUE - JUNCTION 500 SOUTH FAU 1050**	**10,835**	**11,670**	**8,740**
1052	**0.00**	**0.26**	**0.26**	*	**JUNCTION SR 186**	**10,335**	**10,080**	**10,960**
	0.26	0.56	0.30		ARAPEEN DRIVE	5,135	5,010	5,450
	0.56	0.69	0.13		CHIPETA WAY-UNCONSTRUCTED	NA	NA	NA
1053	**0.00**	**1.83**	**1.83**	*	**JUNCTION 3900 SOUTH**	**9,535**	**9,300**	**10,110**
	1.83	2.29	0.46		2700 SOUTH STREET	9,780	9,540	10,370
	2.29	2.41	0.12		PARLEYS BOULEVARD VIA 2000 EAST	5,870	5,730	6,230
	2.41	2.86	0.45		2100 EAST VIA PARKWAY AVENUE	6,945	6,780	7,370
	2.86	3.42	0.56		2100 SOUTH	8,365	8,160	8,870
	3.42	3.97	0.55		1700 SOUTH VIA 2100 EAST STREET	9,780	9,540	10,370
	3.97	4.22	0.25		1300 SOUTH - FOOTHILL BOULEVARD VIA 2100 EAST	10,100	9,860	10,710

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1054	**0.00**	**0.59**	**0.59**	*	**STATE STREET VIA 100 SOUTH IN SALT LAKE CITY**	**10,810**	**10,550**	**11,460**
	0.59	0.89	0.30		500 EAST VIA 100 SOUTH IN SALT LAKE CITY	10,370	10,120	11,000
	0.89	1.19	0.30		700 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	10,570	10,310	11,210
	1.19	1.79	0.60		900 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	10,570	10,310	11,210
	1.79	1.87	0.08		1300 EAST STREET VIA 100 SOUTH STREET IN SALT LAKE CITY	12,475	12,170	13,230
	1.87	2.15	0.28		UNIVERSITY STREET VIA 100 SOUTH -SR 282 - IN SALT LAKE CITY	10,025	9,780	10,630
1055	**0.00**	**1.59**	**1.59**	*	**6200 SOUTH KNUDSEN CORNER**	**11,690**	**12,600**	**9,420**
	1.59	2.31	0.72		CASTO LANE	21,415	23,070	17,270
	2.31	2.70	0.39		HOLLADAY - 4500 SOUTH VIA 2300 EAST	18,340	19,760	14,790
1056	**0.00**	**0.44**	**0.44**	*	**300 WEST STREET**	**14,000**	**13,660**	**14,850**
	0.44	0.58	0.14		MAIN STREET VIA SOUTH TEMPLE	14,875	14,520	15,770
	0.58	1.19	0.61		STATE STREET VIA SOUTH TEMPLE	18,985	20,460	15,310
	1.19	1.49	0.30		500 EAST STREET VIA SOUTH TEMPLE	24,630	26,540	19,860
	1.49	1.79	0.30		700 EAST VIA SOUTH TEMPLE	18,750	20,200	15,120
	1.79	2.39	0.60		900 EAST VIA SOUTH TEMPLE	17,230	18,570	13,890
	2.39	2.47	0.08		1300 EAST-VIRGINIA STREET VIA SOUTH TEMPLE	9,670	10,420	7,800
1058	**0.00**	**0.05**	**0.05**	*	**STATE STREET**	**22,890**	**22,340**	**24,270**
	0.05	0.56	0.50		CANYON ROAD	11,445	11,170	12,140
	0.56	0.87	0.32		E STREET VIA 2ND AVENUE-I STREET VIA 2ND AVENUE	10,005	9,760	10,610
	0.87	1.88	1.01	*	I STREET VIA 2ND AVENUE-VIRGINIA STREET	8,930	8,710	9,470
	1.88	2.89	1.01	*	VIRGINIA STREET VIA 3RD AVENUE	5,550	5,420	5,890
	2.89	3.19	0.31		I STREET VIA 3RD AVENUE	7,945	7,750	8,430
	3.19	3.77	0.57		E STREET VIA 3RD AVENUE - 2ND AVENUE	10,325	10,080	10,950
1060	**0.00**	**0.89**	**0.89**	*	**JUNCTION 900 WEST**	**7,175**	**7,000**	**7,610**
	0.89	1.19	0.30		300 WEST STREET VIA 200 SOUTH IN SALT LAKE CITY	13,450	13,120	14,260
	1.19	1.34	0.15		WEST TEMPLE VIA 200 SOUTH IN SALT LAKE CITY	16,000	15,610	16,970
	1.34	1.49	0.15		MAIN STREET VIA 200 SOUTH IN SALT LAKE CITY	16,510	16,110	17,510
	1.49	2.09	0.60		STATE STREET VIA 200 SOUTH IN SALT LAKE CITY	14,560	14,210	15,440
	2.09	2.39	0.30		500 EAST STREET VIA 200 SOUTH IN SALT LAKE CITY	12,010	11,720	12,740

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1060	2.39	2.69	0.30		700 EAST VIA 200 SOUTH-900 EAST STREET	9,000	8,780	9,540
1061	**0.00**	**1.77**	**1.77**	*	**JCT. FAU 1073 PROPROSED-BOUNTIFUL BLVD UNCONSTRUCTED**	**NA**	**NA**	**NA**
	1.77	2.28	0.93	*	BEGIN CONSTRUCTED	1,190	1,160	1,260
	2.28	3.84	1.56		CANYON ESTATES	5,285	5,160	5,600
	3.84	4.23	0.39		BOUNTIFUL GOLF COURSE-MUELLER PARK ROAD	3,205	3,130	3,400
1062	**0.00**	**0.44**	**0.44**	*	**900 WEST STREET**	**3,185**	**3,110**	**3,380**
	0.44	0.88	0.44		600 WEST VIA 300 NORTH-300 WEST STREET	2,255	2,200	2,390
1063	**0.00**	**1.45**	**1.45**	*	**REDWOOD ROAD VIA 1500 SOUTH**	**2,730**	**2,660**	**2,900**
	1.45	1.98	0.53		JUNCTION 800 WEST FAU 1078	5,195	5,070	5,510
	1.98	2.20	0.22		JUNCTION SR 89 500 WEST STREET	5,790	5,650	6,140
	2.20	2.31	0.11		JUNCTION SR 106 VIA 1500 SOUTH	7,060	6,890	7,490
	2.31	2.86	0.55		JUNCTION MAIN STREET FAU 1023-ORCHARD DRIVE	6,100	5,950	6,470
	2.87	3.35	0.48		JUNCTION ORCHARD DRIVE VIA 1800 SOUTH	5,945	6,410	4,790
	3.35	4.50	1.15		JUNCTION DAVIS BOULEVARD	7,615	8,210	6,140
	4.50	5.23	0.73		JUNCTION BOUNTIFUL BOULEVARD-EAST URBAN BOUNDARY	3,140	3,060	3,330
1064	**0.89**	**1.10**	**0.21**	*	**2200 WEST VIA 700 NORTH**	**7,420**	**7,240**	**7,870**
	1.10	1.63	0.53		FAI 215 STRUCTURE	11,260	12,130	9,080
	1.63	2.24	0.61		REDWOOD ROAD VIA 700 NORTH	18,985	20,460	15,310
	2.24	2.85	0.61		1300 WEST VIA 600 NORTH	15,400	16,590	12,420
	2.85	3.04	0.19		800 WEST VIA 600 NORTH - FAI 15	17,690	19,060	14,260
	3.59	3.84	0.25	*	VICTORY ROAD - EAST CAPITAL STREET	3,830	3,740	4,060
	5.34	5.56	0.22	*	MOUTH OF CITY CREEK CANYON	390	380	410
	5.56	5.88	0.32		E STREET VIA 11TH AVENUE	2,680	2,620	2,840
	5.88	6.95	1.07		I STREET VIA 11TH AVE - VIRGINIA STREET	3,030	2,960	3,210
	7.88	8.45	0.57	*	JUNCTION FAU 1081	2,980	2,910	3,160
	8.45	8.86	0.41		BEGIN UNCONSTRUCTED-FAU 1054	NA	NA	NA
1065	**0.00**	**0.10**	**0.10**	*	**JUNCTION SR 186-NORTH TEMPLE STREET**	**5,650**	**5,510**	**5,990**
	0.10	0.99	0.89	*	NORTH TEMPLE STREET	7,420	7,240	7,870
	0.99	2.92	1.93		700 NORTH STREET	1,670	1,630	1,770

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1065	2.92	4.91	1.99		2100 NORTH STREET VIA 2200 WEST	835	810	890
	4.91	5.36	0.45		BEGIN UNCONSTRUCTED	NA	NA	NA
1066	**0.00**	**1.16**	**1.16**	*	**REDWOOD ROAD - 900 WEST VIA 1000 NORTH SALT LAKE CITY**	**8,755**	**8,540**	**9,280**
1067	**0.00**	**0.75**	**0.75**	*	**2200 WEST ST-REDWOOD ROAD VIA 1800 NORTH**	**835**	**810**	**890**
1068	**0.00**	**0.99**	**0.99**	*	**JUNCTION 4000 WEST STREET FAU 1005**	**3,610**	**3,460**	**3,990**
	0.99	1.92	0.93		3200 WEST	3,610	3,460	3,990
	1.92	2.72	0.80		FAI 215 UNCONSTRUCTED	NA	NA	NA
	2.72	3.55	0.83	*	REDWOOD ROAD VIA 2400 NORTH-FAI 15	3,245	3,500	2,620
1069	**0.00**	**0.49**	**0.49**	*	**JUNCTION SR 89**	**1,245**	**1,210**	**1,320**
	0.49	1.55	1.06		BEGIN UNCONSTRUCTED-FAU 1061	NA	NA	NA
1070	**0.00**	**0.25**	**0.25**	*	**JUNCTION FAU 1006 UNCONSTRUCTED**	**NA**	**NA**	**NA**
	0.25	0.75	0.50	*	BEGIN CONSTRUCTED - FAI 15	5,670	6,110	4,570
1071	**0.43**	**1.42**	**0.99**	*	**ORCHARD DRIVE**	**8,320**	**8,120**	**8,820**
	1.42	1.88	0.46		BOUNTIFUL EAST INC. LIMITS - BOUNTIFUL BOULEVARD	8,320	8,120	8,820
1072	**0.00**	**0.83**	**0.83**	*	**REDWOOD ROAD**	**5,130**	**5,010**	**5,440**
	0.83	1.11	0.28		JUNCTION FAI 15 VIA CENTER STREET	6,050	5,900	6,420
	1.11	1.36	0.25	*	JUNCTION SR 89 IN NORTH SALT LAKE	4,500	4,850	3,630
	1.36	1.56	0.20		JUNCTION ORCHARD DRIVE FAU 1027-DAVIS BOULEVARD	4,450	4,340	4,720
1073	**0.00**	**1.20**	**1.20**	*	**JUNCTION SR 89 - SALT LAKE COUNTY LINE UNCONSTRUCTED**	**NA**	**NA**	**NA**
1074	**0.00**	**1.14**	**1.14**	*	**REDWOOD ROAD**	**2,165**	**2,330**	**1,750**
	1.14	1.40	0.26		NORTH INCORPORATED LIMITS NORTH SALT LAKE	2,850	3,070	2,300
	1.40	1.43	0.03		JUNCTION FAU 1078 AT 2600 SOUTH-JUNCTION SR 93	7,215	7,770	5,820
	1.55	1.75	0.20	*	JUNCTION SR 89	22,795	24,560	18,380
	1.75	2.11	0.36		EAST INC. LIMITS BOUNTIFUL - ORCHARD DRIVE FAU1027	13,735	14,800	11,070
1075	**0.00**	**0.73**	**0.73**	*	**JUNCTION 2700 SOUTH - PARLEYS CANYON BOULEVARD**	**3,415**	**3,330**	**3,620**
	0.73	1.22	0.49	*	JUNCTION 1700 EAST-2000 EAST STREET	2,790	2,720	2,960
1076	**0.00**	**0.25**	**0.25**	*	**JUNCTION SR 106 IN BOUNTIFUL VIA 500 SOUTH STREET**	**27,170**	**26,510**	**28,810**
	0.25	0.69	0.44		MAIN STREET	22,855	22,300	24,240
	0.69	1.37	0.68		ORCHARD DRIVE VIA 500 SOUTH-DAVIS BOULEVARD	14,075	13,730	14,930

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1077	**0.00**	**0.50**	**0.50**	*	**JUNCTION 4800 SOUTH - 4500 SOUTH STREET**	**5,730**	**5,590**	**6,080**
1078	**0.00**	**0.27**	**0.27**	*	**WOODS CROSS INTERCHANGE**	**4,825**	**4,710**	**5,120**
	0.27	1.48	1.21		SOUTH INCORPORATED LIMITS WOODS CROSS	4,825	4,710	5,120
	1.48	1.51	0.03		SOUTH INCORPORATED LIMITS WEST BOUNTIFUL	5,420	5,290	5,750
	1.51	2.18	0.67		500 SOUTH IN WEST BOUNTIFUL VIA 800 WEST	3,285	3,210	3,480
	2.18	2.47	0.29		400 NORTH-FAI 15 VIA 400 NORTH	12,430	12,130	13,180
	2.47	2.89	0.42	*	MAIN STREET IN BOUNTIFUL	14,550	15,680	11,730
	2.89	3.60	0.71		ORCHARD DRIVE - DAVIS BOULEVARD VIA 400 NORTH STREET	7,330	7,150	7,770
1081	**0.00**	**0.23**	**0.23**	*	**JUNCTION SR 282-END OF ROUTE**	**4,000**	**3,900**	**4,240**
1082	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5400 SOUTH SR 173 VIA 3600 WEST**	**14,885**	**14,520**	**15,790**
	1.00	2.00	1.00		4700 SOUTH FAU 1029	15,385	15,010	16,320
	2.00	3.00	1.00		4100 SOUTH FAU 1030	15,865	15,480	16,820
	3.00	3.50	0.50		3500 SOUTH SR 171 VIA 3600 WEST	10,540	10,280	11,180
	3.50	4.00	0.50		3100 SOUTH FAU 1096 VIA 3600 WEST	11,235	10,960	11,910
	4.00	4.75	0.75		2700 SOUTH FAU 1034	12,155	11,860	12,890
	4.75	4.98	0.23		URBANIZED BOUNDARY	12,155	11,860	12,890
	4.98	5.43	0.45		2100 SOUTH FRONTAGE ROAD VIA FRONTAGE ROAD	20,210	19,360	22,330
	5.43	5.89	0.46		3200 WEST FAU 1087 - 2700 WEST	5,885	5,640	6,500
1083	**0.00**	**0.17**	**0.17**	*	**JUNCTION 3600 WEST STREET**	**620**	**670**	**500**
	0.17	0.88	0.71		BEGIN UNCONSTRUCTED PORTION	NA	NA	NA
	0.88	2.08	1.20	*	BEGIN CONSTRUCTED - REDWOOD ROAD	1,850	1,990	1,490
1084	**0.00**	**0.15**	**0.15**	*	**JCT. PROPROSED BANGERTER HIGHWAY VIA 14400 SOUTH**	**2,175**	**2,120**	**2,310**
	0.15	1.09	0.94		FAU 1009 2700 WEST - SR 68	2,500	2,690	2,020
1085	**0.00**	**4.80**	**4.80**	*	**BANGERTER HIGHWAY UNCONSTRUCTED**	**NA**	**NA**	**NA**
	4.80	5.50	0.70	*	BEGIN CONSTRUCTED VIA 9800 SOUTH	6,500	6,340	6,890
	5.50	6.68	1.18		700 EAST VIA SEGO LILY DRIVE	6,500	6,340	6,890
	6.68	7.68	1.00		1300 EAST UNCONSTRUCTED	NA	NA	NA
1086	**0.00**	**1.36**	**1.36**	*	**JUNCTION 2000 EAST-PROPOSED WASATCH DRIVE**	**NA**	**NA**	**NA**
	1.36	2.81	1.10	*	BEGIN CONSTRUCTED FAU 1086	1,510	1,470	1,600

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1086	2.81	4.01	1.20		JUNCTION SR 209-SR 210	9,770	9,530	10,360
	3.60	3.95	0.35		UNCONSTRUCTED	NA	NA	NA
1087	**0.00**	**0.66**	**0.66**	*	**JUNCTION 9000 SO VIA 3200 WEST**	**NA**	**NA**	**NA**
	0.66	1.50	0.84	*	BEGIN CONSTRUCTED	9,435	9,210	10,010
	1.50	2.50	1.00		JUNCTION 7800 SOUTH FAU 1014	12,095	11,800	12,830
	2.50	3.51	1.01		JUNCTION 7000 SOUTH FAU 1092	11,135	10,870	11,810
	3.51	4.51	1.00		JUNCTION 6200 SOUTH FAU 1022	11,065	10,800	11,730
	4.51	5.51	1.00		JUNCTION SR 173 5300 SOUTH	12,015	11,720	12,740
	5.51	6.51	1.00		JUNCTION 4700 SOUTH FAU 1028	13,180	12,860	13,980
	6.51	7.51	1.00		JUNCTION 4100 SOUTH FAU 1030	11,310	11,040	11,990
	7.51	8.00	0.49		JUNCTION 3500 SOUTH SR 171	10,385	10,130	11,010
	8.00	9.53	1.25		JUNCTION 3100 SOUTH FAU 1096	11,730	11,450	12,440
	9.25	9.53	0.28		URBAN BOUNDARY	11,730	11,450	12,440
	9.53	9.85	0.32		JUNCTION 2100 SOUTH VIA 3200 WEST	5,295	5,070	5,850
	9.85	10.50	0.62		BEGIN UNCONSTRUCTED	NA	NA	NA
	10.50	10.85	0.50	*	BEGIN CONSTRUCTED	5,000	4,790	5,530
	10.85	11.71	0.74		BEGIN UNCONSTRUCTED-500 SOUTH	NA	NA	NA
1088	**0.18**	**1.12**	**0.94**	*	**STATE STREET**	**8,835**	**9,520**	**7,120**
	1.12	1.60	0.48		700 EAST STREET VIA 11400 SOUTH	11,500	12,390	9,270
	1.60	2.13	0.53		1000 EAST-1300 EAST	8,550	9,210	6,890
1089	**0.00**	**1.00**	**1.00**	*	**JUNCTION 4100 SOUTH VIA 7200 WEST**	**7,600**	**8,190**	**6,130**
	1.00	2.49	1.49		JUNCTION 3500 SOUTH SR 171	10,050	10,830	8,100
	6.02	6.39	0.37		JUNCTION FAI 80	430	460	350
	6.39	6.64	0.25		UNCONSTRUCTED-PROPOSED FAU 1007	NA	NA	NA
1090	**0.00**	**0.93**	**0.93**	*	**JUNCTION 9000 SOUTH VIA FRONTAGE ROAD**	**6,210**	**6,060**	**6,590**
	0.93	1.90	0.97		STATE STREET VIA 9400 SOUTH	23,475	25,290	18,930
	1.90	2.39	0.49		700 EAST - SR 209 SKI BYPASS ROAD	26,940	29,030	21,720
1091	**0.00**	**1.00**	**1.00**	*	**6200 SOUTH**	**11,200**	**10,930**	**11,880**
	1.01	2.23	1.22		5400 SOUTH	11,350	11,080	12,040

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1091	2.23	3.25	1.00		JUNCTION 4700 SOUTH FAU 1028 VIA 4800 WEST	10,855	10,590	11,510
	3.25	4.25	1.00		JUNCTION 4100 SOUTH FAU 1030	12,765	12,460	13,540
	4.25	4.75	0.50		JUNCTION SR 171 3500 SO	5,290	5,160	5,610
	4.75	7.25	2.50		3100 SOUTH STREET UNCONSTRUCTED	5,290	5,160	5,610
	7.25	8.25	1.00	*	BEGIN CONSTRUCTED-700 SOUTH STREET	580	620	470
1092	**0.00**	**0.45**	**0.45**	*	**JUNCTION BANGERTER HIGHWAY VIA 7000 SOUTH**	**7,580**	**8,170**	**6,110**
	0.45	0.95	0.50		JUNCTION 3200 WEST FAU 1087	10,105	10,890	8,150
	0.95	1.95	1.00		JUNCTION 2700 WEST FAU 1009	12,235	13,180	9,860
	1.95	2.45	0.50		JUNCTION REDWOOD ROAD	11,470	12,360	9,250
	2.45	3.50	1.05		JUNCTION 1300 WEST UNCONSTRUCTED-SR 48	NA	NA	NA
1093	**0.00**	**1.40**	**1.40**	*	**JUNCTION 1300 EAST VIA CREEK ROAD**	**9,960**	**9,720**	**10,560**
	1.40	3.12	1.72		HIGHLAND DRIVE FAU 1049	7,850	7,660	8,320
	3.12	3.77	0.65		DANISH ROAD - WASATCH BOULEVARD	4,445	4,340	4,710
1094	**0.00**	**1.01**	**1.01**	*	**STATE STREET VIA 100 NORTH**	**11,805**	**11,520**	**12,520**
	1.01	2.01	1.00		JUNCTION 700 EAST STREET VIA 8600 SOUTH	9,940	9,700	10,540
	2.01	3.23	1.22		JUNCTION 1300 EAST STREET - 2000 EAST STREET	9,885	9,650	10,480
1095	**0.00**	**0.75**	**0.75**	*	**JUNCTION 7600 SOUTH FAU 1016 BENGAL BOULEVARD**	**7,235**	**7,060**	**7,670**
	0.75	1.75	1.00		JUNCTION 7000 SOUTH - 6200 SOUTH STREET VIA 2300 EAST	8,595	8,390	9,110
1096	**0.00**	**1.00**	**1.00**	*	**JUNCTION 5600 WEST SR 172 VIA 3100 SOUTH**	**3,600**	**3,510**	**3,820**
	1.00	2.01	1.01		JUNCTION 4800 WEST FAU 1091	10,740	10,480	11,390
	2.01	2.38	0.37		JUNCTION 4000 WEST FAU 1093	11,600	11,320	12,300
	2.38	2.50	0.12		BANGERTER HIGHWAY	11,600	11,320	12,300
	2.50	3.00	0.50		3600 WEST STREET	11,600	11,320	12,300
	3.00	3.51	0.51		JUNCTION 3200 WEST FAU 1087 VIA 3100 SOUTH	10,160	9,910	10,770
	3.51	4.51	1.00		JUNCTION 2700 WEST FAU 1009	10,170	9,920	10,790
	4.51	4.78	0.27		JUNCTION SR 68 FAU 1011 REDWOOD ROAD	2,615	2,550	2,770
	4.78	5.08	0.30		UNCONSTRUCTED	NA	NA	NA
	5.08	5.19	0.11	*	BEGIN CONSTRUCTED - 3300 SOUTH	2,600	2,540	2,760
1097	**0.00**	**0.12**	**0.12**	*	**12300 SOUTH - 12200 SOUTH VIA 900 EAST**	**4,320**	**4,220**	**4,580**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
1097	0.12	1.30	1.18		JUNCTION 900 EAST VIA 12200 SOUTH	9,140	8,920	9,690
	1.30	2.30	1.00		JUNCTION 11400 SOUTH - 10600 SOUTH VIA 10TH EAST	12,180	11,890	12,920
1098	**0.00**	**0.40**	**0.40**	*	**1300 EAST STREET FAU 1047**	**46,675**	**50,290**	**37,630**
	0.40	0.70	0.30		FORT UNION BOULEVARD VIA UNION PARK AVENUE	52,370	56,430	42,220
	0.70	0.80	0.10		FAI 215 INTERCHANGE - 6400 SOUTH	17,165	18,500	13,840
1102	**7.44**	**7.67**	**0.23**	*	**200 EAST STREET - MAIN STREET VIA 400 SOUTH RICHFIELD**	**1,025**	**1,100**	**830**
1401	**2.95**	**3.58**	**0.63**	*	**SOUTHWEST URBAN BOUNDARY**	**880**	**840**	**970**
	3.58	3.83	0.25	*	BEGIN UNCONSTRUCTED PORTION JUNCTION SR 73	NA	NA	NA
	3.83	4.35	0.52		UNCONSTRUCTED	NA	NA	NA
	4.35	4.86	0.51	*	BEGIN CONSTRUCTION PORTION FAU 1401	395	390	420
	4.86	5.11	0.25		BEGIN UNCONSTRUCTED PORTION	NA	NA	NA
	5.11	7.01	1.90		UNCONSTRUCTED	NA	NA	NA
1403	**0.00**	**1.34**	**1.34**	*	**JUNCTION SR 89 - 9600 NORTH. IN HIGHLAND**	**425**	**410**	**450**
1901	**0.00**	**0.96**	**0.96**	*	**JUNCTION SR 56 - NORTH URBAN BOUNDARY**	**2,190**	**2,360**	**1,770**
2001	**0.00**	**1.44**	**1.44**	*	**JUNCTION SR 126 - FAI 15 24TH STREET INTERCHANGE OGDEN**	**9,875**	**10,640**	**7,960**
	1.44	2.01	0.57	*	WASHINGTON BOULEVARD	9,205	9,920	7,420
	2.01	2.58	0.57		MONROE AVENUE VIA 24TH STREET-HARRISON BOULEVARD	8,470	9,130	6,830
2002	**0.00**	**1.06**	**1.06**	*	**GENTILE STREET**	**3,345**	**3,260**	**3,550**
	1.06	2.02	0.96		SOUTH INCORPORATED LIMITS LAYTON	3,345	3,600	2,700
	2.02	2.34	0.32		WEST INCORPORATED LIMITS KAYSVILLE-FAI 15 VIA 2ND NORTH	4,310	4,640	3,470
	2.34	3.74	1.40	*	JUNCTION SR 273	6,690	7,210	5,390
	3.74	3.86	0.12		EAST INCORPORATED LIMITS KAYSVILLE	4,250	4,580	3,430
	3.86	3.89	0.03		WEST INCORPORATED LIMITS FRUIT HEIGHTS - SR 89	5,000	5,390	4,030
2003	**0.00**	**2.75**	**2.75**	*	**OGDEN SOUTH URBAN BOUNDARY - 200 NORTH**	**2,205**	**2,150**	**2,340**
2004	**0.00**	**1.78**	**1.78**	*	**OGDEN WEST URBAN BOUNDARY LAYTON EAST INC. LIMITS**	**2,835**	**2,770**	**3,010**
	1.78	3.43	1.65		WEST INCORPORATED LIMITS LAYTON	8,030	7,840	8,520
	3.43	3.91	0.48		FLINT STREET-MAIN STREET SR 126 VIA GENTILE STREET	9,920	9,680	10,520
2005	**0.00**	**0.91**	**0.91**	*	**JUNCTION SR 273**	**13,525**	**14,570**	**10,900**
	0.91	1.22	0.31		NORTH INCORPORATED LIMITS KAYSVILLE	17,655	19,020	14,230

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2005	1.22	1.82	0.60		SOUTH INCORPORATED LIMITS LAYTON - JUNCTION SR 126	22,545	24,290	18,180
2006	**0.00**	**0.83**	**0.83**	*	**JUNCTION SR 232 VIA GORDON AVENUE**	**14,950**	**14,590**	**15,850**
	0.83	1.25	0.42		FORT LANE - FAIRFIELD ROAD FAU 2061	12,750	12,440	13,520
2007	**0.00**	**2.04**	**2.04**	*	**GENTILE STREET FAU 2004 - SYRACUSE ROAD SR 108**	**3,885**	**3,790**	**4,120**
2008	**0.00**	**0.72**	**0.72**	*	**JUNCTION SR 232 HILL FIELD ROAD**	**14,345**	**15,460**	**11,570**
	0.72	2.48	1.76		JUNCTION FORT LANE STREET	7,730	8,330	6,230
	2.48	2.71	0.23	*	BEGIN CONSTRUCTED	3,015	3,250	2,430
	2.71	2.79	0.08		BEGIN UNCONSTRUCTED	NA	NA	NA
	2.79	3.23	0.44	*	BEGIN CONSTRUCTED PORTION-SR 89	1,960	2,110	1,580
2010	**0.00**	**0.53**	**0.53**	*	**JUNCTION SR 126 COUNTY LINE CLEARFIELD**	**9,775**	**9,540**	**10,370**
	0.53	1.23	0.70		700 SOUTH VIA MAIN-SR 126 VIA 700 SOUTH	7,805	7,620	8,280
2015	**0.00**	**0.71**	**0.71**	*	**36TH STREET**	**5,885**	**5,740**	**6,240**
	0.71	1.72	1.01		31ST STREET VIA GRANT AVENUE IN OGDEN	5,775	5,640	6,120
	1.72	2.29	0.57		24TH STREET VIA GRANT IN OGDEN	4,515	4,410	4,790
	2.29	3.19	0.90		20TH STREET OGDEN - 12TH STREET VIA GRANT AVENUE	2,930	2,860	3,110
	3.19	4.09	0.90		12TH STREET SR 39 VIA GRANT IN OGDEN	3,710	3,620	3,930
	4.09	4.67	0.58		20TH STREET VIA GRANT IN OGDEN	6,905	6,740	7,320
	4.67	5.67	1.00		24TH STREET SR 53 VIA LINCOLN AVENUE IN OGDEN	7,945	7,750	8,430
	5.67	6.53	0.86		31ST STREET VIA LINCOLN AVENUE - RIVERDALE ROAD	5,985	5,840	6,350
2017	**0.00**	**0.16**	**0.16**		**JUNCTION SR 235**	**19,570**	**21,090**	**15,780**
	0.16	0.68	0.52		2600 NORTH STREET IN NORTH OGDEN	12,490	12,190	13,250
	0.68	0.80	0.12		2880 NORTH STREET IN NORTH OGDEN UNCONSTRUCTED	NA	NA	NA
	0.80	1.02	0.22	*	450 EAST STREET - 3100 NORTH	3,160	3,080	3,350
2021	**0.00**	**0.70**	**0.70**	*	**36TH STREET**	**2,200**	**2,150**	**2,330**
	0.70	1.72	1.02		31ST STREET VIA ADAMS AVENUE IN OGDEN	2,250	2,200	2,390
	1.72	2.29	0.57		24TH STREET - 20TH STREET VIA ADAMS AVENUE IN OGDEN	2,475	2,420	2,620
2022	**0.00**	**0.28**	**0.28**	*	**JUNCTION SR 126**	**6,830**	**6,660**	**7,240**
	0.28	0.78	0.50		EAST INCORPORATED LIMITS ROY	8,580	8,370	9,100
	0.78	1.72	0.94		WEST INC. LIMITS RIVERDALE - SR 26 RIVERDALE ROAD	9,160	8,940	9,710

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2023	**0.00**	**0.70**	**0.70**	*	**36TH STREET VIA JEFFERSON AVENUE**	**2,775**	**2,710**	**2,940**
	0.70	1.72	1.02		31ST STREET VIA JEFFERSON AVENUE	1,795	1,750	1,900
	1.72	2.29	0.57		24TH ST- 20TH STREET VIA JEFFERSON AVENUE	1,675	1,630	1,780
2024	**0.00**	**0.89**	**0.89**	*	**JUNCTION SR 89 UNCONSTRUCTED**	**NA**	NA	**NA**
	0.89	1.15	0.26		SOUTH INCORPORATED LIMITS OGDEN- SR 203 HARRISON BLVD	1,925	1,880	2,040
2025	**0.00**	**2.39**	**2.39**	*	**JUNCTION FAU 2005-SR 89 VIA MUTTON HOLLOW ROAD**	**3,230**	**3,150**	**3,430**
2026	**0.00**	**0.51**	**0.51**	*	**HARRISON BOULEVARD**	**5,855**	**5,710**	**6,210**
	0.51	0.86	0.35		SOUTH INCORPORATED LIMITS OGDEN-4600 SOUTH FAU 2035	4,455	4,350	4,720
2027	**0.00**	**0.40**	**0.40**	*	**JUNCTION FAU 1029**	**NA**	**NA**	**NA**
	0.40	0.91	0.51	*	BEGIN CONSTRUCTED PORTION	3,115	3,040	3,300
	0.91	2.04	1.13		JUNCTION SR 89	3,495	3,410	3,710
	2.04	2.33	0.29		45TH STREET	2,880	2,810	3,050
	2.33	2.68	0.35		42TH STREET	1,800	1,760	1,910
	2.68	3.10	0.42		39TH STREET	3,425	3,340	3,630
	3.10	3.78	0.68		36TH STREET	3,475	3,740	2,800
	3.78	3.94	0.17		31ST STREET VIA QUINCY AVENUE OGDEN	6,310	6,800	5,090
	3.94	4.87	0.92		30TH STREET VIA SULLIVAN ROAD	13,040	14,050	10,510
	4.87	5.45	0.58		24TH STREET VIA MONROE AVENUE	16,625	17,910	13,400
	5.45	5.67	0.22		20TH STREET VIA MONROE AVENUE	4,440	4,780	3,580
	5.67	5.85	0.18		END OF CONSTRUCTED SECTION	NA	NA	NA
	5.85	6.49	0.64	*	BEGIN CONSTRUCTED SECTION	12,565	13,540	10,130
	6.49	6.80	0.31		JUNCTION SR 39 12TH STREET	15,265	16,450	12,310
	6.80	7.02	0.22		9TH STREET	9,500	10,240	7,660
	7.02	7.55	0.53		7TH STREET FAU 2040	6,540	7,050	5,270
	7.55	8.10	0.55		2ND STREET FAU 2042	6,210	6,690	5,010
	8.10	8.84	0.74		400 NORTH FAU 2044	5,240	5,650	4,220
	8.84	9.12	0.28		1100 NORTH STREET FAU 2046	2,240	2,410	1,810
	9.12	10.82	1.70		END OF CONSTRUCTION	NA	NA	NA
2028	**0.00**	**0.45**	**0.45**	*	**RIVERDALE ROAD**	**13,900**	**14,980**	**11,210**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2028	0.45	1.17	0.72		WASHINGTON AVENUE VIA 40TH STREET	26,220	28,250	21,140
	1.17	1.68	0.51		WEST INCORPORATED LIMITS OGDEN	17,455	18,810	14,070
	1.68	2.61	0.93		HARRISON BOULEVARD - FAU 2035 FOOTHILL DRIVE	3,965	3,870	4,200
2029	**0.00**	**1.80**	**1.80**	*	**JUNCTION FAU 2031-SR 89 UNCONSTRUCTED**	**NA**	**NA**	**NA**
2030	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 108 SYRACUSE ROAD WEST URBAN BOUNDARY**	**4,075**	**3,980**	**4,320**
	0.47	1.16	0.69		WEST INCORPORATED LIMITS ROY-SR 126	5,550	5,420	5,890
2031	**0.00**	**0.79**	**0.79**	*	**JUNCTION SOUTH WEBER DRIVE SR 60**	**1,350**	**1,320**	**1,430**
	0.79	1.51	0.72		JUNCTION SR 84 END OF CONSTRUCTION PORTION	NA	NA	NA
	1.51	1.87	0.36	*	BEGIN CONSTRUCTED PORTION	960	1,030	770
	1.87	2.17	0.30		COUNTY ROAD - SR 89	6,485	6,990	5,230
2032	**0.00**	**0.28**	**0.28**	*	**WALL AVENUE**	**11,830**	**12,750**	**9,540**
	0.28	0.43	0.15		RIVERDALE ROAD VIA 36TH STREET	8,460	9,120	6,820
	0.43	1.15	0.72		WASHINGTON BOULEVARD	10,450	11,260	8,430
	1.15	1.59	0.44		QUINCY AVENUE FAU 2027-SR 203 HARRISON BOULEVARD	11,750	12,660	9,470
2033	**0.00**	**0.69**	**0.69**	*	**JUNCTION SR 39 12TH STREET**	**13,745**	**13,410**	**14,580**
	0.69	1.20	0.51		7TH STREET VIA HARRISON BOULEVARD	11,635	11,350	12,340
	1.20	1.73	0.53		2ND STREET FAU 2042	11,050	10,780	11,720
	1.73	3.05	1.32		400 NORTH STREET FAU 2044	4,505	4,400	4,780
	3.05	3.34	0.29		SOUTH INCORPORATED LIMITS NORTH OGDEN	3,340	3,260	3,540
	3.34	4.65	1.31		1700 NORTH FAU 2048	1,625	1,590	1,720
	4.65	4.96	0.31		2600 NORTH IN NORTH OGDEN	195	190	210
	4.96	5.51	0.55		END OF CONSTRUCTION SECTION-FAU 2052 UNCONSTRUCTED	NA	NA	NA
2035	**0.00**	**1.28**	**1.28**	*	**JUNCTION SR 89**	**1,175**	**1,150**	**1,250**
	1.28	2.93	1.65		END OF CONSTRUCTED SECTION	NA	NA	NA
	2.93	3.47	0.54		SOUTH INCORPORATED LIMITS OGDEN UNCONSTRUCTED	NA	NA	NA
	3.47	4.14	0.67	*	BEGIN CONSTRUCTED PORTION	1,340	1,310	1,420
	4.14	4.89	0.75		36TH STREET VIA FOOTHILL - SR 203 VIA 36TH	4,570	4,460	4,850
2036	**0.00**	**0.98**	**0.98**	*	**JUNCTION SR 79 - SR 53 VIA 1100 WEST FAU 2036**	**9,340**	**9,110**	**9,900**
2038	**0.00**	**0.43**	**0.43**	*	**WALL AVENUE - WASHINGTON BOULEVARD VIA 21ST STREET**	**6,550**	**7,060**	**5,280**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2038	0.44	0.71	0.27		WASHINGTON BOULEVARD VIA 20TH STREET	6,785	7,310	5,470
	0.71	1.59	0.88		JEFFERSON AVENUE-SR 203 HARRISON BOULEVARD	5,135	5,530	4,140
	1.60	1.98	0.38		WASHINGTON BOULEVARD VIA 20TH STREET-WALL AVENUE	6,550	7,060	5,280
2039	**0.00**	**1.65**	**1.65**	*	**JUNCTION FAU 2003 VIA 10TH SOUTH IN KAYSVILLE**	**1,840**	**1,800**	**1,950**
	1.66	2.64	0.98		JUNCTION SR 273-SR 89	2,290	2,230	2,430
2040	**5.38**	**7.38**	**2.00**	*	**JUNCTION SR 108-SR 126 VIA 4800 SOUTH**	**10,290**	**10,040**	**10,910**
2042	**0.00**	**0.61**	**0.61**	*	**DEFENSE DEPOT OGDEN MAIN GATE VIA 2ND STREET**	**7,510**	**7,330**	**7,960**
	0.61	1.03	0.42		WALL AVENUE	6,885	6,720	7,300
	1.03	1.90	0.87		WASHINGTON BOULEVARD VIA 2ND STREET	8,335	8,130	8,840
	1.90	2.17	0.27		JUNCTION JACKSON AVENUE FAU 2027 - HARRISON BOULEVARD	5,735	5,600	6,080
2044	**0.00**	**0.64**	**0.64**	*	**JUNCTION FAU 2076-SR 104 2100 S VIA 1850 WEST**	**NA**	**NA**	**NA**
2046	**0.00**	**0.50**	**0.49**	*	**JUNCTION SR 89 VIA LARSEN LANE**	**10,355**	**11,160**	**8,350**
	0.50	1.03	0.53		JUNCTION SR 235 VIA 1100 NORTH	3,550	3,460	3,760
	1.03	1.46	0.43		MONROE AVENUE VIA 1100 NORTH-FAU 2033	2,420	2,360	2,570
2048	**0.00**	**1.24**	**1.24**	*	**JUNCTION FAS 595**	**435**	**420**	**460**
	1.24	2.22	0.98		JUNCTION SR 89-SR 235 UNCONSTRUCTED	NA	NA	NA
	2.22	2.82	0.60	*	WASHINGTON BOULEVARD	340	330	360
	2.82	3.39	0.57		FAU 2027 VIA 1700 NORTH - MOUNTAIN ROAD	490	480	520
2050	**0.00**	**0.70**	**0.70**	*	**WASHINGTON BOULEVARD**	**5,435**	**5,860**	**4,380**
	0.70	1.68	0.98		FAU 2027 VIA 2600 NORTH - FAU 2033	2,490	2,430	2,640
2052	**0.00**	**0.49**	**0.49**	*	**450 EAST STREET VIA 3100 NORTH STREET IN NORTH OGDEN**	**3,700**	**3,610**	**3,920**
	0.49	0.99	0.50		750 EAST STREET VIA 3100 NORTH IN NORTH OGDEN	4,325	4,220	4,590
	0.99	1.25	0.26		1050 EAST STREET VIA 3100 NORTH STREET	2,850	2,780	3,020
	1.25	1.54	0.29		EAST INCORPORATED LIMITS NORTH OGDEN-URBAN BOUNDARY	1,940	1,890	2,060
2054	**0.00**	**1.45**	**1.45**	*	**JUNCTION FAU 2058-JUNCTION FAU 2017 VIA ELBERTA DRIVE**	**3,520**	**3,430**	**3,730**
2056	**0.00**	**2.01**	**2.01**	*	**JUNCTION SR 108-SR 126 VIA 6000 SOUTH IN ROY**	**3,030**	**2,960**	**3,210**
2058	**0.00**	**1.96**	**1.96**	*	**JUNCTION SR 89**	**2,730**	**2,940**	**2,200**
	1.96	2.91	0.95		ELBERTA DRIVE	3,890	4,190	3,140
	2.91	3.41	0.50		WEST INCORPORATED LIMITS PLEASANT VIEW	3,890	4,190	3,140

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2058	3.41	3.70	0.29		WEST INC. LIMITS NORTH OGDEN - JUNCTION FAU 2017	3,890	4,190	3,140
2061	**0.00**	**1.70**	**1.70**	*	**JUNCTION FAU 2002 2ND NORTH VIA FAIRFIELD ROAD**	**5,030**	**4,910**	**5,530**
	1.70	3.65	1.95		JUNCTION SR 109 GENTILE STREET	9,220	9,000	9,780
	3.65	4.59	0.94		JUNCTION FAU 2008 ANTELOPE DRIVE-SR 193	11,545	11,270	12,240
2063	**0.00**	**1.50**	**1.50**	*	**JUNCTION SR 108 VIA 1000 WEST**	**4,085**	**3,990**	**4,330**
	1.50	2.00	0.50		JUNCTION 200 SOUTH FAU 2066	4,740	4,630	5,030
	2.00	2.48	0.48		JUNCTION SR 107 300 NORTH-800 NORTH FAU 2064	3,455	3,370	3,660
2064	**0.00**	**1.00**	**1.00**	*	**JUNCTION SR 108 VIA 800 NORTH COUNTY LINE CLINTON**	**4,395**	**4,290**	**4,660**
	1.00	2.02	1.02		JUNCTION FAU 2063 1000 WEST-SR 126	6,465	6,310	6,860
2066	**0.00**	**0.18**	**0.18**	*	**JUNCTION SR 108 VIA 200 SOUTH SYRACUSE**	**375**	**370**	**400**
	0.18	0.52	0.34		BEGIN UNCONSTRUCTED	NA	NA	NA
	0.52	0.64	0.12	*	BEGIN CONSTRUCTED	4,925	4,810	5,220
	0.64	1.02	0.38		BEGIN UNCONSTRUCTED	NA	NA	NA
	1.02	2.02	1.00	*	JUNCTION 1000 WEST FAU 2063	3,515	3,430	3,730
	2.03	2.18	0.15		JUNCTION MAIN STREET FAU 2010-SR 126	3,655	3,570	3,880
2071	**0.00**	**0.61**	**0.61**	*	**JUNCTION SR 26 VIA 300 WEST**	**16,225**	**15,830**	**17,210**
	0.61	0.96	0.24		4525 SOUTH IN WASHINGTON TERRACE-4700 SOUTH	12,035	11,740	12,760
	0.96	1.32	0.36	*	JUNCTION 300 WEST VIA 4800 SOUTH	3,300	3,220	3,500
	1.32	1.53	0.21		200 EAST-WASHINGTON BOULEVARD SR 89	4,505	4,400	4,780
2073	**0.00**	**0.32**	**0.32**	*	**JUNCTION SR 89**	**3,895**	**3,800**	**4,130**
	0.32	0.68	0.36		BEGIN UNCONSTRUCTED	NA	NA	NA
	0.88	1.57	0.69	*	JUNCTION ADAMS AVENUE - 40TH STREET FAU 2028	4,780	4,660	5,070
2076	**0.00**	**1.00**	**1.00**	*	**WEST URBAN BOUNDARY - FAU 2001**	**5,580**	**5,440**	**5,920**
2078	**0.00**	**0.11**	**0.11**	*	**JUNCTION SR 89**	**3,565**	**3,480**	**3,780**
	0.11	0.30	0.19		1225 EAST STREET	3,740	3,650	3,970
	0.30	0.69	0.39		1400 EAST STREET-HARRISON BOULEVARD	3,740	3,650	3,970
2083	**9.80**	**12.90**	**3.10**	*	**FAU 2083 SOUTH URBAN BOUNDARY UNCONSTRUCTED**	**NA**	NA	**NA**
	15.95	18.85	2.90		LOCAL ROAD	895	960	740
	18.85	19.34	0.49		JUNCTION SR 127	895	960	740

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
2083	19.34	21.09	1.75		UNCONSTRUCTED	NA	NA	NA
	21.09	21.57	0.48	*	CONSTRUCTED	1,255	1,220	1,330
	21.57	23.47	1.90		UNCONSTRUCTED	NA	NA	NA
	23.47	26.07	2.60		DAVIS - WEBER COUNTY LINE - SR 37	NA	NA	NA
3002	**0.00**	**0.24**	**0.24**	*	**JUNCTION SR 89 - 400 EAST UNCONSTRUCTED**	**NA**	**NA**	**NA**
	0.24	1.13	0.37	*	400 EAST FAU 3071	3,195	3,120	3,390
	0.37	0.89	0.52		800 EAST FAU 3071	3,195	3,120	3,390
	1.13	1.48	0.35		END OF CONSTRUCTION PORTION	NA	NA	NA
	1.48	3.68	2.20	*	JUNCTION CANYON DRIVE - EAST URBAN BOUNDARY	2,810	2,740	2,980
3003	**0.00**	**0.15**	**0.15**	*	**JUNCTION SR 89**	**2,015**	**1,970**	**2,140**
	0.15	0.42	0.27		100 NORTH VIA 100 WEST AMERICAN FORK	2,055	2,010	2,180
	0.42	1.60	1.18		300 NORTH IN AMERICAN FORK	2,055	2,010	2,180
	1.60	3.80	2.20		1120 NORTH - JUNCTION SR 92	2,105	2,050	2,230
3004	**0.00**	**0.37**	**0.37**	*	**MAIN STREET SR 89 IN SPRINGVILLE**	**13,105**	**14,120**	**10,570**
	0.37	1.24	0.87		400 EAST- FAU 3077 CANYON ROAD VIA 400 SOUTH	9,605	10,350	7,740
3006	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 89 MAIN STREET**	**5,255**	**5,130**	**5,570**
	0.39	1.24	0.85		400 EAST VIA CENTER STREET-1300 EAST STREET	4,540	4,430	4,810
3011	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 147 IN MAPLETON**	**2,010**	**2,170**	**1,620**
	0.39	0.99	0.60		600 NORTH MAPLETON	2,615	2,820	2,110
	0.99	1.18	0.19		1600 NORTH MAPLETON	2,615	2,820	2,110
	1.18	1.28	0.10		2000 NORTH MAPLETON	2,615	2,820	2,110
	1.28	1.67	0.39		NORTH INC. LIMITS MAPLETON-HOBBLE CREEK DRIVE	3,290	3,550	2,650
3013	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 89**	**5,750**	**5,610**	**6,100**
	0.60	1.10	0.58		300 NORTH VIA 500 EAST AMERICAN FORK	6,450	6,290	6,840
	1.10	1.18	0.08		END OF CONSTRUCTION VIA 500 EAST UNCONSTRUCTED	NA	NA	NA
	1.18	1.47	0.08		700 NORTH STREET UNCONSTRUCTED	6,450	6,290	6,840
	1.47	1.88	0.41	*	BEGIN CONSTRUCTED PORTION	3,300	3,220	3,500
	1.56	1.77	0.21		BEG UNCONSTRUCTED PORTION	NA	NA	NA
	1.88	2.03	0.15		200 EAST-SR 74 UNCONSTRUCTED	NA	NA	NA

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3015	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 180 500 EAST UNCONSTRUCTED**	**NA**	NA	**NA**
	0.60	1.34	0.74		4850 WEST UNCONSTRUCTED	NA	NA	NA
	1.34	2.22	0.88	*	SR 89	3,875	4,180	3,120
	2.22	2.82	0.60		8300 NORTH	3,660	3,940	2,950
	2.82	3.37	0.55		8800 NORTH FAU 3076 UNCONSTRUCTED	NA	NA	NA
	3.37	4.85	1.48	*	9200 NORTH - URBAN BOUNDARY	3,715	4,000	3,000
3023	**0.00**	**1.26**	**1.26**	*	**JUNCTION 800 SOUTH FAU 3025**	**3,965**	**3,870**	**4,200**
	1.26	1.81	0.55		400 WEST FAU 3033 VIA 1200 SOUTH	4,200	4,100	4,450
	1.81	2.31	0.50		MAIN STREET FAU 3039 - SR 89	6,685	6,520	7,090
3024	**0.00**	**1.13**	**1.13**	*	**BOAT HARBOR**	**890**	**960**	**720**
	1.13	2.10	0.97		JUNCTION FAU 3029 ROAD TO AIRPORT-SR 114	4,545	4,900	3,660
	2.11	2.54	0.43	*	SR 89 500 WEST	26,035	25,410	27,610
	2.54	3.18	0.64		UNIVERSITY AVENUE VIA CENTER STREET	11,405	11,130	12,090
	3.18	3.35	0.17		700 EAST STREET-900 EAST STREET	7,545	7,360	8,000
3025	**0.00**	**0.50**	**0.50**	*	**JUNCTION 800 SOUTH OREM FAU 3042**	**4,175**	**4,070**	**4,430**
	0.50	1.01	0.51		JUNCTION 400 SOUTH	4,175	4,070	4,430
	1.01	1.51	0.50		CENTER STREET VIA 1200 WEST OREM	5,650	5,510	5,990
	1.51	2.03	0.52		400 NORTH VIA 1200 WEST	4,140	4,040	4,390
	2.03	3.03	1.00		800 NORTH OREM-1600 NORTH FAU 3052	2,200	2,150	2,330
3026	**0.18**	**0.81**	**0.63**	*	**UNIVERSITY AVENUE PROVO**	**6,750**	**6,590**	**7,160**
	0.81	0.99	0.18		700 EAST VIA 700 NORTH-900 EAST	5,595	5,460	5,930
3027	**0.00**	**1.00**	**1.00**	*	**JUNCTION 800 SOUTH FAU 3042 OREM**	**5,975**	**5,830**	**6,340**
	1.00	1.45	0.45		CENTER STREET FAU 3046 VIA 400 EAST	6,375	6,220	6,760
	1.45	1.96	0.51		400 NORTH FAU 3050 VIA 400 EAST	4,105	4,010	4,350
	1.96	2.56	0.60		800 NORTH SR 52 - 1200 NORTH FAU 3043	3,285	3,210	3,480
3029	**0.00**	**1.11**	**1.11**	*	**JUNCTION CENTER STREET FAU 3024**	**1,230**	**1,330**	**990**
	1.11	3.51	2.40		BEGIN UNCONSTRUCTED-SR 189	NA	NA	NA
3030	**0.00**	**0.37**	**0.37**	*	**JUNCTION SR 114**	**3,630**	**3,540**	**3,850**
	0.37	1.57	1.20		JUNCTION 2100 WEST FAU 3039	19,060	18,600	20,210

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3030	1.57	1.85	0.28		500 WEST STREET SR 89	20,960	20,450	22,230
	1.85	2.02	0.17		200 WEST VIA 800 NORTH - UNIVERSITY AVENUE	20,980	20,470	22,250
3031	**0.00**	**0.50**	**0.50**	*	**JUNCTION 1600 NORTH STREET**	**6,165**	**6,020**	**6,540**
	0.50	1.28	0.78		NORTH INCORPORATED LIMITS OREM	4,365	4,260	4,630
	1.28	1.50	0.22		400 NORTH STREET VIA 400 EAST STREET IN LINDON	4,365	4,260	4,630
	1.50	1.79	0.29		BEGIN UNCONSTRUCTED	NA	NA	NA
	1.79	2.39	0.60	*	NORTH INCORPORATED LIMITS LINDON	655	640	690
	2.39	2.58	0.19		200 SOUTH PLEASANT GROVE UNCONSTRUCTED	NA	NA	NA
	2.58	3.18	0.60	*	1300 EAST PLEASANT GROVE	NA	NA	NA
	3.18	3.36	0.18	*	CONSTRUCTED PORTION	1,315	1,280	1,390
	3.36	3.56	0.20		UNCONSTRUCTED PORTION-FAU 3064	NA	NA	NA
3032	**0.00**	**0.29**	**0.29**	*	**JUNCTION SR 89**	**26,955**	**26,300**	**28,590**
	0.29	0.45	0.16		200 WEST VIA 1230 NORTH PROVO	26,955	26,300	28,590
	0.45	0.56	0.11		UNIVERSITY AVENUE - CANYON ROAD FAU 3051 VIA 1230 NORTH	25,170	24,560	26,690
3033	**0.00**	**0.51**	**0.51**	*	**JUNCTION 800 SOUTH FAU 3042 VIA 400 WEST**	**6,895**	**6,730**	**7,310**
	0.51	1.01	0.50		400 SOUTH VIA 400 WEST STREET	6,285	6,130	6,670
	1.01	1.52	0.51		CENTER STREET FAU 3046	5,715	5,580	6,060
	1.52	2.04	0.52		JUNCTION 400 NORTH FAU 3050 - 800 NORTH SR 52	6,380	6,230	6,770
3034	**0.00**	**0.43**	**0.43**	*	**JUNCTION CANYON ROAD**	**18,680**	**20,130**	**15,060**
	0.43	0.71	0.28		450 EAST- 900 EAST VIA 1650 NORTH	11,625	12,530	9,370
3036	**0.00**	**0.45**	**0.45**	*	**UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265**	**24,555**	**26,460**	**19,800**
	0.45	0.58	0.13		UNIVERSITY AVENUE VIA 2230 NORTH - CANYON ROAD FAU 3051	17,405	18,750	14,030
3039	**0.00**	**0.50**	**0.50**	*	**CENTER STREET VIA 1225 WEST STREET**	**950**	**930**	**1,010**
	0.50	1.71	1.21		BEGIN UNCONSTRUCTED SECTI	NA	NA	NA
	1.71	2.07	0.36	*	1460 NORTH	3,650	3,560	3,870
	2.07	3.16	1.09		NORTH INCORPORATED LIMITS PROVO VIA 2100 WEST	4,025	3,930	4,270
	3.16	3.71	0.55		SR 265 - 800 SOUTH FAU 3042	6,015	5,870	6,380
3040	**0.00**	**0.12**	**0.12**	*	**UNIVERSITY AVENUE SR 189 - CANYON ROAD**	**22,320**	**24,050**	**17,990**
3041	**0.00**	**0.64**	**0.64**	*	**UNIVERSITY PARKWAY (BYU DIAGONAL) SR 265**	**14,220**	**15,320**	**11,460**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3041	0.64	1.14	0.50		800 SOUTH STREET OREM	11,865	12,780	9,570
	1.14	1.65	0.51		400 SOUTH VIA 800 EAST	9,300	10,020	7,500
	1.65	2.17	0.52		CENTER STREET FAU 3046 OREM	7,600	8,190	6,130
	2.17	2.67	0.50		400 NORTH FAU 3050 VIA 800 EAST	7,205	7,760	5,810
	2.67	3.57	0.90		800 NORTH SR 52	12,540	13,510	10,110
	3.57	5.18	1.61		1600 NORTH - 400 EAST IN OREM	10,495	11,310	8,460
3042	**0.00**	**0.50**	**0.50**	*	**JUNCTION 1200 WEST FAU 3025**	**2,970**	**2,900**	**3,150**
	0.50	1.00	0.50		800 WEST STREET VIA 800 SOUTH	3,585	3,500	3,800
	1.00	1.50	0.50		400 WEST FAU 3033	6,180	6,030	6,550
	1.50	1.85	0.35		SAND HILL ROAD	8,365	8,160	8,870
	1.85	2.49	0.64		JUNCTION SR 89	11,535	11,260	12,230
	2.49	2.69	0.20		800 EAST VIA 800 SOUTH OREM	7,185	7,010	7,620
	2.69	2.74	0.05		END OF CONSTRUCTED PORTION	NA	NA	NA
	2.74	3.37	0.63	*	BEGINNING OF CONSTRUCTION	9,435	9,210	10,010
	3.37	3.83	0.46		UNIVERSITY AVENUE - CANYON ROAD	8,685	8,470	9,210
3043	**0.00**	**1.04**	**1.04**	*	**JUNCTION 1200 WEST FAU 3025 VIA 1200 NORTH**	**4,725**	**4,610**	**5,010**
	1.04	1.98	0.94		SR 89 OREM VIA 1200 NORTH	3,055	2,980	3,240
	1.98	2.48	0.50		400 EAST FAU 3027 - 800 EAST FAU 3041	2,450	2,390	2,600
3044	**0.00**	**0.59**	**0.59**	*	**JUNCTION SR 89 - 400 EAST VIA EAST CENTER STREET**	**2,005**	**1,960**	**2,130**
3045	**0.00**	**0.27**	**0.27**	*	**JUNCTION 300 SOUTH**	**10,705**	**11,530**	**8,630**
	0.27	0.73	0.46		CENTER STREET VIA 200 WEST	17,430	18,780	14,050
	0.73	1.00	0.27		500 NORTH VIA 200 WEST PROVO	18,330	19,750	14,780
	1.00	1.44	0.44		800 NORTH VIA 200 WEST	19,315	20,810	15,570
	1.44	1.92	0.48		1230 NORTH VIA 200 WEST	17,515	18,870	14,120
	1.92	2.34	0.42		UNIVERSITY PARKWAY (BYU DIAG.) SR 265 - 2230 NORTH FAU 3036	17,925	19,310	14,450
3046	**0.00**	**0.43**	**0.43**		**JUNCTION SR 114**	**10,330**	**11,130**	**8,330**
	0.43	0.50	0.07		JUNCTION FAI 15 VIA CENTER STREET	17,635	19,000	14,220
	0.50	2.04	1.54		1200 WEST FAU 3025	17,875	19,260	14,410
	2.04	3.01	0.97		JUNCTION SR 89	18,510	19,940	14,920

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3046	3.01	3.54	0.53		800 EAST STREET VIA CENTER STREET OREM	13,985	15,070	11,280
	3.54	4.05	0.51		EAST INCORPORATED LIMITS OF OREM VIA CENTER STREET	10,930	11,780	8,810
	4.05	4.43	0.38		JCT. SR 189 UNIVERSITY AVENUE- FAU 3051 UNCONSTRUCTED	NA	NA	NA
3047	**0.00**	**0.26**	**0.26**	*	**JUNCTION SR 89 300 SOUTH VIA 700 EAST**	**4,120**	**4,020**	**4,370**
	0.26	0.90	0.64		CENTER STREET FAU 3024	2,650	2,590	2,810
	0.90	1.11	0.21		700 NORTH FAU 3026	15,795	15,410	16,750
	1.11	1.72	0.61		900 NORTH VIA 700 EAST	20,175	19,690	21,400
	1.72	1.82	0.10		BRIGHAM YOUNG UNIVERSITY ADMINISTRATION BUILDING	20,860	20,360	22,120
	1.82	2.21	0.39		450 EAST - CANYON ROAD FAU 3051	22,345	21,800	23,700
3050	**0.00**	**0.47**	**0.47**	*	**JUNCTION SR 114**	**4,100**	**4,000**	**4,350**
	0.47	1.48	1.01		1200 WEST VIA GENEVA ROAD OREM	7,665	7,480	8,130
	1.48	1.86	0.38		400 WEST STREET FAU 3033 OREM	7,290	7,110	7,730
	1.86	2.99	1.13		JUNCTION SR 89 VIA GENEVA ROAD - 800 EAST FAU 3041	10,910	10,650	11,570
3051	**0.00**	**0.21**	**0.21**	*	**JUNCTION UNIVERSITY AVENUE SR 189**	**18,505**	**18,060**	**19,620**
	0.21	0.57	0.36		1230 NORTH PROVO	16,625	16,220	17,630
	0.57	2.68	2.11		1650 NORTH STREET VIA CANYON ROAD PROVO	9,460	9,230	10,030
	2.68	3.32	0.64		JUNCTION FAU 3042 AT EDGEMONT VIA CANYON ROAD	14,075	13,730	14,930
	3.32	4.48	1.16		JUNCTION 4525 NORTH FAU 3059 - SR 189	5,995	5,850	6,360
3052	**0.00**	**1.17**	**1.17**	*	**JUNCTION FAI 15**	**13,415**	**14,450**	**10,820**
	1.17	1.28	0.11		JUNCTION SR 89 VIA 1600 NORTH - 400 WEST FAU 3031	14,710	15,850	11,860
3053	**0.00**	**0.66**	**0.66**	*	**2200 NORTH STREET PROVO**	**5,425**	**5,290**	**5,750**
3054	0.66	2.08	1.42		2950 NORTH - 4525 NORTH STREET VIA 650 EAST	1,385	1,350	1,470
3055	**0.00**	**0.60**	**0.60**	*	**JUNCTION SR 89 IN PROVO**	**12,375**	**13,330**	**9,980**
	0.60	1.25	0.65		CENTER STREET VIA 900 EAST IN PROVO	17,535	18,890	14,140
	1.25	2.02	0.77		700 NORTH VIA 900 EAST IN PROVO	22,155	23,870	17,860
	2.02	2.71	0.69		1430 NORTH VIA 900 EAST IN PROVO	22,470	24,210	18,120
	2.71	3.17	0.46		650 EAST FAU 3053 - FAU 3051 VIA 2200 NORTH IN PROVO	14,000	15,090	11,290
3056	**0.00**	**0.44**	**0.44**	*	**JUNCTION SR 146 VIA 200 SOUTH PLEASANT GROVE**	**5,360**	**5,230**	**5,680**
	0.44	1.72	1.28		500 EAST - 1500 EAST VIA 200 SOUTH	6,030	5,880	6,390

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3057	**0.00**	**0.09**	**0.09**	*	**JUNCTION FAU 3039 2100 WEST**	**1,570**	**1,530**	**1,660**
	0.09	0.50	0.41		BEGIN UNCONSTRUCTED PORTION	NA	NA	NA
	0.50	1.03	0.53	*	BEGIN CONSTRUCTED PORTION	8,210	8,010	8,710
	1.03	1.18	0.15		COLUMBIA LANE	5,645	5,510	5,990
	1.18	1.32	0.14		JUNCTION SR 89	4,870	4,750	5,160
	1.32	1.34	0.02		BEGIN UNCONSTRUCTED	NA	NA	NA
	1.34	1.50	0.16	*	BEGIN CONSTRUCTED PORTION - JUNCTION 550 WEST	5,150	5,030	5,460
	1.50	1.75	0.25	*	JUNCTION 1850 NORTH - SR 265	31,350	30,590	33,250
3059	**0.00**	**2.78**	**2.78**	*	**JUNCTION NORTH TEMPLE DRIVE UNCONSTRUCTED**	**NA**	**NA**	**NA**
	2.78	3.05	0.27	*	BEGIN CONSTRUCTED - FAU 3051	270	260	290
3062	**0.00**	**0.43**	**0.43**	*	**JUNCTION SR 146 PLEASANT GROVE**	**5,135**	**5,010**	**5,450**
	0.43	1.33	0.90		500 EAST-FAU 3031 VIA 500 NORTH	3,085	3,010	3,270
3064	**0.00**	**0.39**	**0.39**	*	**JUNCTION SR 89**	**1,855**	**1,810**	**1,970**
	0.39	0.44	0.05		BEGIN UNCONSTRUCTED	NA	NA	NA
	0.44	1.42	0.98	*	BEGINNING OF CONSTRUCTION 500 EAST STREET	3,715	3,630	3,940
	1.42	2.56	1.14		EAST INCORPORATED LIMITS AMERICAN FORK	3,900	3,810	4,140
	2.56	2.84	0.28		280 WEST STREET	2,800	2,730	2,970
	2.84	3.91	1.07		JUNCTION SR 146	2,800	2,730	2,970
	3.91	4.13	0.22		BEGIN UNCONSTRUCTED - FAU 3031	NA	NA	NA
3071	**0.00**	**1.01**	**1.01**	*	**JUNCTION SR 89**	**3,800**	**3,710**	**4,030**
	1.01	1.40	0.39		400 SOUTH SPRINGVILLE	3,205	3,130	3,400
	1.40	1.79	0.39		CENTER STREET VIA 400 EAST SPRINGVILLE	2,575	2,510	2,730
	1.79	2.83	1.04		400 NORTH VIA 400 EAST UNCONSTRICTED - SR 89	NA	NA	NA
3076	**0.00**	**0.79**	**0.79**	*	**FAU 1403 URBAN BOUNDARY LEHI UNCONSTRUCTED**	**NA**	**NA**	**NA**
	0.79	1.05	0.26	*	BEGIN CONSTRUCTED PORTION	3,305	3,230	3,500
	1.05	1.45	0.40		FAU 3003 - SR 74 FAU 3005	3,305	3,230	3,500
3077	**0.00**	**0.61**	**0.61**	*	**HOBBLE CREEK ROAD**	**2,190**	**2,360**	**1,770**
	0.61	1.00	0.39		400 SOUTH STREET - CENTER STREET VIA 1300 EAST	4,590	4,480	4,870
3078	**0.00**	**0.48**	**0.48**	*	**500 EAST STREET**	**2,100**	**2,050**	**2,230**

ROUTE NAME	BEG. ACCUM. MILEAGE	END. ACCUM. MILEAGE	SECTION LENGTH MILEAGE		DESCRIPTION	1995 AADT	1995 AWDT	1995 AWET
3078	0.48	0.69	0.21		EAST INCORPORATED LIMITS AMERICAN FORK VIA 700 NORTH	2,100	2,050	2,230
	0.69	2.30	1.61		JUNCTION 4650 WEST - JUNCTION SR 146	1,505	1,470	1,600
4001	**7.50**	**8.37**	**0.87**	*	**900 SOUTH ST. GEORGE**	**7,150**	**7,700**	**5,760**
	8.37	8.47	0.10		700 EAST	7,315	7,880	5,900
	8.47	8.81	0.34		600 SOUTH VIA 700 EAST	7,530	8,110	6,070
	8.81	9.26	0.45		300 SOUTH - JUNCTION SR 34	9,465	10,200	7,630
4002	**0.00**	**0.10**	**0.10**	*	**JUNCTION SR 18**	**32,755**	**35,290**	**26,410**
	0.10	1.73	1.63		VALLEY DRIVE	24,700	26,610	19,910
	1.73	2.03	0.30		WEST INCORPORATED LIMITS ST. GEORGE	20,595	22,190	16,600
	2.03	2.43	0.40		WEST URBAN BOUNDARY ST. GEORGE - FAS 416	20,595	22,190	16,600
5001	**0.00**	**1.59**	**1.59**	*	**JUNCTION SR 91**	**5,415**	**5,830**	**4,370**
	1.59	1.90	0.31		600 SOUTH STREET	6,150	6,630	4,960
	1.90	4.14	2.24		300 SOUTH STREET - JUNCTION SR 30	7,445	8,020	6,000
5003	**0.00**	**1.01**	**1.01**	*	**JUNCTION SR 89 - SR 237**	**6,385**	**6,230**	**6,770**
5007	**0.00**	**0.50**	**0.50**	*	**JUNCTION LOCAL ROAD - CENTER STREET LOGAN**	**8,010**	**8,630**	**6,460**
	0.21	1.12	0.91		JUNCTION SOUTH URBAN BOUNDARY - JCT. COUNTY ROAD	8,010	8,630	6,460
	0.75	1.76	1.01		JUNCTION SR 91 - JUNCTION LOCAL ROAD	14,790	15,940	11,920
6005	**3.69**	**4.24**	**0.55**	*	**URBAN BOUNDARY**	**960**	**940**	**1,020**
	4.24	4.86	0.62		WEST INC. LIMITS SPANISH FORK - SR 156 MAIN STREET	1,955	1,910	2,070
7001	**0.00**	**0.56**	**0.56**	*	**JUNCTION SR 55 IN PRICE**	**3,900**	**4,200**	**3,140**
	0.56	0.73	0.17		APPROXIMATELY 350 NORTH - NORTH INC. LIMITS PRICE	3,210	3,130	3,400
7003	**0.00**	**0.52**	**0.52**	*	**JUNCTION SR 55 - PRICE NORTH URBAN BOUNDARY FAS 298**	**6,040**	**5,890**	**6,410**
7004	**0.00**	**0.73**	**0.73**	*	**JUNCTION SR 55 - PRICE EAST URBAN BOUNDARY FAS 299**	**2,350**	**2,290**	**2,490**
8004	**0.00**	**0.77**	**0.77**	*	**JUNCTION SR 36 MAIN STREET IN TOOELE**	**5,375**	**5,790**	**4,330**
	0.77	1.58	0.81		700 EAST VIA 200 NORTH	1,980	2,130	1,600
	1.58	2.28	0.70		TOOELE EAST INCORPORATED LIMITS - FAS 102	3,515	3,430	3,730
9002	**14.43**	**14.92**	**0.49**	*	**600 WEST VIA FOREST STREET - MAIN STREET SR 13**	**7,985**	**8,600**	**6,440**

END OF AWDT SECTION

Commercial Truck Statistics On Utah's Interstates and Freeways

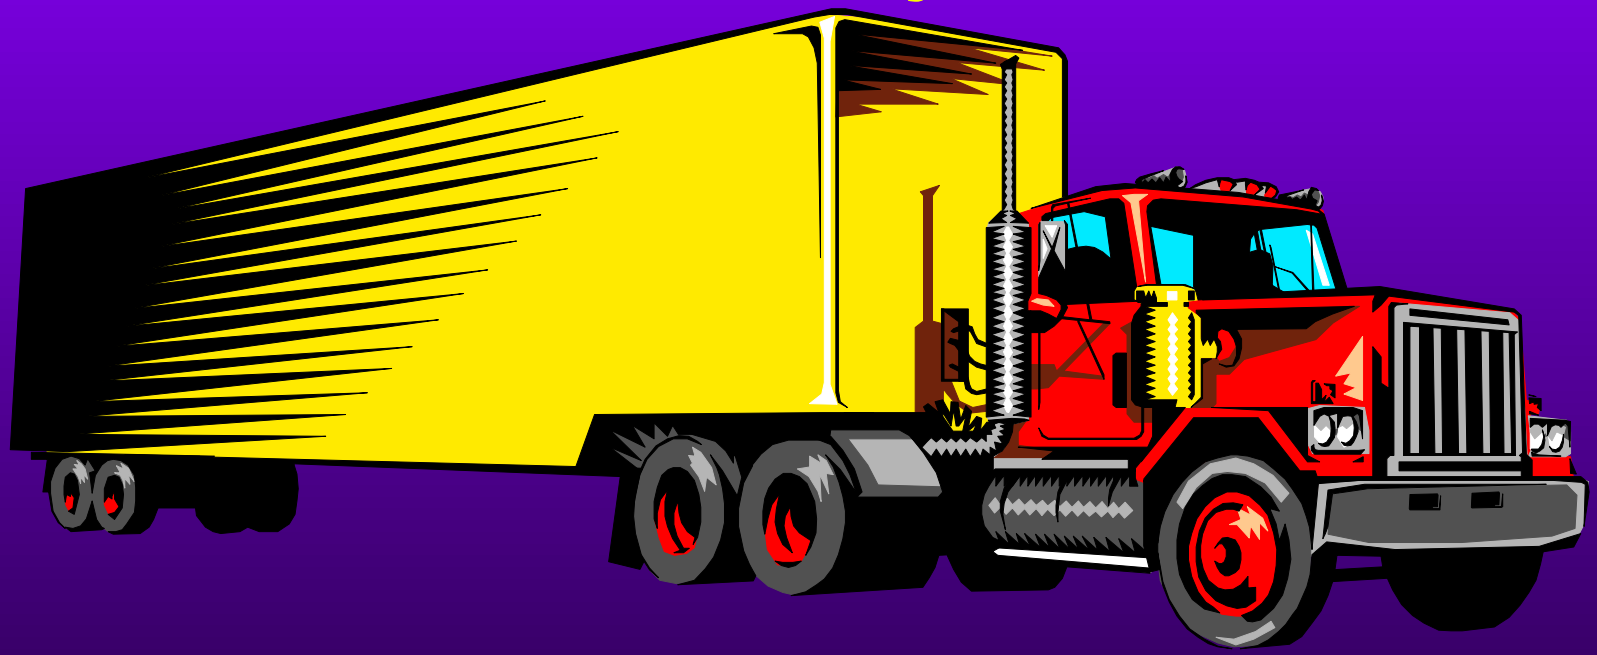

AVERAGE TRUCKS PER DAY
ON UTAH'S INTERSTATES AND FREEWAYS
FOR 1995

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00015	0.00	Utah - Arizona State Line					
			275	2,000	255	180	2,710
	6.30	South St. George Interchange					
			245	1,890	235	180	2,550
	10.93	Washington Interchange					
			255	1,850	235	180	2,520
	15.90	Junction SR 9, Hurricane Interchange					
			235	1,770	185	175	2,365
	56.25	South Cedar City Interchange					
			210	1,610	220	175	2,215
	61.92	North Cedar City Interchange					
			205	1,820	220	175	2,420
	132.22	Junction FAI 70					
			160	1,360	115	175	1,810
	178.67	Junction SR 50, Holden Interchange					
			150	1,350	145	175	1,820

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00015	189.02	Junction SR 50, Scipio Interchange					
			150	1,370	130	175	1,825
	222.83	South Nephi Interchange					
			175	1,575	130	175	2,055
	225.30	Junction SR 132, Center Nephi Interchange					
			270	1,645	155	175	2,245
	228.15	North Nephi Interchange					
			230	1,670	235	175	2,310
	251.59	South Payson Interchange					
			270	1,770	235	175	2,450
	253.34	North Payson Interchange					
			685	1,810	250	175	2,920
	260.65	Junction SR 214, Moark Interchange					
			945	2,750	250	175	4,120
	266.32	Junction SR 189, University Avenue					
			1,400	2,770	315	175	4,660
	274.51	800 North Interchange, Orem SR 52					
			1,540	2,790	405	175	4,910
	294.20	Draper Interchange					
			1,820	3,100	405	175	5,500

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00015	301.87	Junction FAI 215, Murray					
			1,385	2,445	290	210	4,330
	307.52	Junction FAI 80 (East of FAI 15)					
			2,000	3,940	610	200	6,750
	310.79	Junction FAI 80 (West of FAI 15)					
			2,060	2,855	585	200	5,700
	315.95	Junction FAI 215, North Salt Lake					
			2,575	4,460	630	255	7,920
	327.27	Junction SR 89					
			2,465	3,920	515	255	7,155
	341.92	Junction SR 26, Riverdale Road					
			1,340	3,720	515	255	5,830
	344.75	FAI 84 & 31st Street, Ogden					
			1,400	3,850	500	240	6,230
	354.63	Junction SR 126					
			1,025	2,445	475	240	4,185
	364.54	Junction SR 91, Brigham City					
		Proposed Forest Street Interchange					
			680	2,235	445	240	3,600

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00015	379.27	SR 13, Elwood Interchange					
			540	2,180	420	240	3,380
	382.66	Junction FAI 84, Tremonton					
			350	1,115	205	160	1,830
	403.26	Utah - Idaho State Line					
A00070	0.00	Junction FAI 15					
			120	615	75	20	830
	23.29	Junction SR 89					
			120	535	75	20	750
	37.26	South Richfield Interchange					
			130	300	75	20	525
	40.00	North Richfield Interchange					
			145	375	75	20	615
	54.37	Salina Interchange					
			145	595	665	35	1,440
	71.61	Convulsion Mine Exit					
			125	580	175	35	915
	88.72	Junction SR 10, Fremont Junction					
			190	765	75	35	1,065

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00070	155.82	Junction SR 6					
			175	745	60	35	1,015
	179.82	Junction SR 191, Crescent Junction					
			115	610	40	35	800
	229.36	Utah - Colorado State Line					
A00080	0.00	Utah - Nevada State Line					
			305	1,430	225	290	2,250
	98.77	Tooele Interchange (SR 36)					
			560	1,780	240	290	2,870
	101.47	Lake Point Interchange (SR 201)					
			220	760	80	30	1,090
	114.53	Airport Road					
			940	1,430	205	40	2,615
	117.48	Junction FAI 215					
			1,305	1,585	160	45	3,095
	118.08	Junction FAI 15, (Route Ends)					
	120.05	Junction FAI 15, (Route Begins)					
			1,220	1,735	560	0	3,515

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00080	124.81	Junction FAI 215					
			850	1,790	505	0	3,145
	142.15	Kimball Junction (SR 224, Park City)					
			485	1,715	480	0	2,680
	144.85	Junction SR 40, Silvercreek Junction					
			300	1,550	345	0	2,195
	165.47	Junction FAI 84					
			545	2,675	710	0	3,930
	189.99	Utah - Wyoming State Line					
A00084	0.00	Utah - Idaho State Line					
			190	1,065	215	80	1,550
	41.80	Junction I-15, Near Tremonton (Route Ends)					
	80.37	Junction FAI 15, In Ogden (Route Begins)					
			410	805	145	0	1,360
	87.72	Junction SR 89, Uintah Junction					
			295	1,125	315	0	1,735
	119.72	Junction FAI 80, Echo Junction					

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00201	0.00	Junction FAI 80, Lake Point Interchange					
			450	910	215	205	1,780
	11.23	Junction SR 172 (5600 West)					
			1,125	1,225	215	205	2,770
	13.24	Junction 154 (4000 West)					
			2,850	1,760	215	205	5,030
	15.06	Junction FAI 215					
			2,430	1,670	160	140	4,400
	15.68	Junction SR 68 (Redwood Road)					
			2,040	1,590	135	105	3,870
	16.85	Junction 900 West					
			2,345	1,635	135	105	4,220
	17.53	Junction FAI 15					
A00215	0.00	Junction FAI 80, (Parley's Canyon)					
			855	280	115	0	1,250
	1.88	3300 South Interchange, SR 171					
			560	205	145	0	910
	6.30	6400 South Interchange (Knudsen Corner)					
			590	250	95	20	955

ROUTE	ACCUM. MILEAGE	DESCRIPTION	SINGLE UNIT	SINGLE TRAILER	DOUBLE TRAILER	TRIPLE TRAILER	TOTAL TRUCKS
A00215	11.50	Junction FAI 15, (In Murray)					
			1,095	1,240	355	90	2,780
	19.52	Junction SR 201, (2100 South)					
			1,325	1,625	535	210	3,695
	22.33	Junction FAI 80					
			605	1,525	135	125	2,390
	27.75	Junction SR 68 (North Salt Lake)					
			600	1,560	170	130	2,460
	28.98	Junction FAI 15 (North Salt Lake)					

END OF TRUCK STATISTICS SECTION

AUTOMATIC TRAFFIC RECORDER DATA BY MONTH OF 1995

PERMANENT STATION LOCATIONS

Stat	Route	Station Location	Page
301	SR 80 (A00080)	Parleys Canyon	PERM-5
302	SR 15 (A00015)	South of Draper Crossroads	PERM-6
303	SR 91 (A00090)	North of Webster Junction	PERM-7
304	SR 89 (A00089)	North of Garden City	PERM-8
305	SR 24 (A00024)	North of Sigurd	PERM-9
306	SR 15 (A00015)	North of Center Street Interchange in Provo	PERM-10
307	SR 84 (A00084)	East of Mountain Green Interchange	PERM-11
308	SR 40 (A00040)	Daniels Canyon	PERM-12
309	SR 80 (A00080)	East of Echo Junction	PERM-13
310	SR 15 (A00015)	South of Plymouth	PERM-14
312	SR 6 (A00006)	Southeast of Moark Junction	PERM-15
313	SR 15 (A00015)	South of Scipio	PERM-16
314	SR 6 (A00006)	West of Helper	PERM-17
315	SR 15 (A00015)	South of Lagoon Interchange	PERM-18
316	SR 89 (A00089)	South of SR 193 (Hillfield Road)	PERM-19
317	SR 210 (A00210)	Little Cottonwood Canyon	PERM-20
318	SR 80 (A00080)	North of Coalville Interchange	PERM-21
319	SR 189 (A00189)	Provo Canyon	PERM-22
320	SR 39 (A00039)	Ogden Canyon	PERM-23
321	SR 6 (A00006)	West of Elberta Junction	PERM-24
322	SR 152 (A00152)	Big Cottonwood Canyon	PERM-25
323	SR 80 (A00080)	Delle Interchange	PERM-26

Stat	Route	Station Location	Page
324	SR 666 (A00666)	West of Eastland Road	PERM-27
325	SR 89 (A00089)	1087 South State Street in Salt Lake City	PERM-28
327	SR 214 (A00214)	South of SR 156 in Spanish Fork	PERM-29
329	SR 89 (A00089)	North of Junction Washington Boulevard & Riverdale Road in Ogden	PERM-30
332	SR 186 (A00186)	South of Sunnyside Avenue Salt Lake City	PERM-31
333	SR 71 (A00071)	700 East and 1200 South in Salt Lake City	PERM-32
335	SR 173 (A00173)	5400 South at 900 West in Murray City	PERM-33
340	SR 80 (A00080)	1100 West Overpass in Salt Lake City	PERM-34
341	SR 80 (A00080)	300 East Overpass in Salt Lake City	PERM-35
344	SR 15 (A00015)	1700 South Overpass in Salt Lake City	PERM-36
345	SR 15 (A00015)	500 South On-Ramp in Salt Lake City	PERM-37
346	SR 15 (A00015)	600 South Off-Ramp in Salt Lake City	PERM-38
347	SR 15 (A00015)	5900 South Overpass in Murray City	PERM-39
348	SR 15 (A00015)	South of 31st Street Interchange in Ogden	PERM-40
349	SR 15 (A00015)	South of Santaquin	PERM-41
350	SR 189 (A00189)	University Avenue, North University Avenue Interchange in Provo	PERM-42
351	SR 215 (A00215)	West of 700 West in Murray City	PERM-43
353	SR 215 (A00215)	North of 3100 South Overpass in West Valley City	PERM-44
354	SR 171 (A00171)	3300 South West of SR 15 Salt Lake City	PERM-45
355	SR 171 (A00171)	3500 South at 7658 West in Magna City	PERM-46
356	SR 201 (A00201)	2100 South West of Jordan River Bridge in Salt Lake City	PERM-47
362	SR 89 (A00089)	West of Garden City	PERM-48
363	SR 91 (A00091)	North of Wellsville	PERM-49
382	SR 14 (A00014)	East of Cedar City	PERM-50

Stat	Route	Station Location	Page
400	SR 15 (A00015)	South of Bloomington	PERM-51
401	SR 15 (A00015)	South of Leeds	PERM-52
402	SR 9 (A00009)	West of Hurricane	PERM-53
403	SR 15 (A00015)	North of North Beaver Interchange	PERM-54
404	SR 70 (A00070)	West of SR 6	PERM-55
405	SR 21 (A00021)	West of Beaver	PERM-56
406	SR 71 (A00071)	700 East, South of 4500 South in Murray	PERM-57
407	SR 68 (A00068)	Redwood Road, South of Bluffdale	PERM-58
408	SR 68 (A00068)	Redwood Road, North of 1700 South in Salt Lake City	PERM-59
409	SR 186 (A00186)	North Temple at Jordan River Bridge in Salt Lake City	PERM-60
411	SR 89 (A00089)	East of Kanab	PERM-61
412	SR 11 (A00011)	South of Kanab	PERM-62
414	SR 95 (A00095)	South of Hanksville	PERM-63
415	SR 89 (A00089)	North of Marysvale	PERM-64
416	SR 89 (A00089)	North of Birdseye	PERM-65
418	SR 6 (A00006)	North of SR 70 Interchange near Woodside	PERM-66
420	SR 191 (A00191)	North of Monticello	PERM-67
421	SR 191 (A00191)	North of SR 279 near Moab	PERM-68
424	SR 191 (A00191)	North of Vernal	PERM-69
425	SR 40 (A00040)	West of Roosevelt	PERM-70
427	SR 10 (A00010)	North of Huntington	PERM-71
430	SR 30 (A00030)	East of Curlew Junction	PERM-72
431	SR 28 (A00028)	South of Levan	PERM-73
501	SR 215 (A00215)	2500 North in Salt Lake City	PERM-74
502	SR 15 (A00015)	South of Nephi	PERM-75
503	SR 89 (A00089)	Salina	PERM-76

Stat	Route	Station Location	Page
504	SR 89 (A00089)	South of Circleville	PERM-77
505	SR 15 (A00015)	North of Paragonah	PERM-78
506	SR 191 (A00191)	South of Bluff	PERM-79
507	SR 6 (A00006)	Northwest of Price	PERM-80
508	SR 70 (A00070)	Northeast of South Richfield Interchange	PERM-81
509	SR 40 (A00040)	North of Midway	PERM-82
510	SR 218 (A00218)	West of Smithfield	PERM-83
511	SR 237 (A00237)	North of North Logan	PERM-84
711	SR 154 (A00154)	Bangerter Highway South of 2400 South in West Valley City	PERM-85

Station: 35-301 **Route:** 0080 (A00080)
Location: I-80, Parley's Canyon
Accum. Mileage: 126.59

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	28035	32397	31607	32078	33373	36914	36781	32799	33158	98.9	85.4
FEBRUARY	31180	33341	28926	32752	33824	37708	37994	33675	33310	101.1	87.6
MARCH	29583	32356	32667	33816	33862	36756	36428	33752	34011	99.2	87.9
APRIL	27029	30830	31777	33291	33822	35104	34090	32163	32965	97.6	83.7
MAY	31986	34673	33526	34722	35336	38639	38078	35186	35239	99.8	91.6
JUNE	40390	38130	39436	40964	42327	46664	48553	42495	41776	101.7	110.6
JULY	49677	46351	48271	45600	47088	53286	56552	49674	48035	103.4	129.3
AUGUST	52903	42490	44608	45326	48439	56023	62511	49922	47214	105.7	129.9
SEPTEMBER	42271	43496	38523	39834	41071	48330	50652	43856	42540	103.1	114.1
OCTOBER	34886	35733	36874	37489	38771	43811	41617	38201	38333	99.7	99.4
NOVEMBER	27300	32049	33647	36487	33033	37575	37355	33977	34576	98.3	88.4
DECEMBER	28088	32918	33699	35185	35848	39967	37836	34840	35735	97.5	90.7
DAILY AVERAGE FOR YEAR	35114	36312	36170	37318	38170	42593	43325	38420	38113	100.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	91.4	94.5	94.1	97.1	99.3	110.9	112.8				

Station: 35-302 **Route:** 0015 (A00015)
Location: I-15, South of Draper Crossroads
Accum. Mileage: 291.24

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	45178	66583	70063	69203	67987	75834	65475	65262	69787	93.5	86.0
FEBRUARY	45248	66492	66966	67727	69244	76152	68141	65710	69316	94.8	86.6
MARCH	53816	67342	68258	70621	74856	81469	72293	70373	72919	96.5	92.8
APRIL	54358	68645	70756	73436	74948	90394	73126	71671	75636	94.8	94.5
MAY	64816	78680	80828	82694	84115	96256	83258	81445	84021	96.9	107.4
JUNE	69437	79533	79446	81060	84745	94512	83345	82252	84384	97.5	108.4
JULY	58713	75083	75164	82598	80752	89100	79583	76689	80280	95.5	101.1
AUGUST	65044	78743	79156	82568	88544	93366	85111	81948	84338	97.2	108.0
SEPTEMBER	64851	79897	80597	83084	85405	95710	83597	82396	85452	96.4	108.6
OCTOBER	62209	77134	79028	79134	84456	92680	81466	78800	82086	96.0	103.9
NOVEMBER	54610	74564	78668	82504	75826	86035	77425	75895	79487	95.5	100.1
DECEMBER	50951	72304	80006	83402	87998	92270	75859	77104	83628	92.2	101.6
DAILY AVERAGE FOR YEAR	57138	73798	75862	78279	79990	88828	77440	75854	79351	95.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	75.3	97.3	100.0	103.2	105.5	117.1	102.1				

Station: 35-303 **Route:** 0091 (A00091)
Location: SR 91, North of Webster Junction
Accum. Mileage: 43.89

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	3264	4287	4341	4405	4412	5337	5017	4392	4534	96.9	81.2
FEBRUARY	3886	4861	4272	4600	4854	5960	5721	4879	4909	99.4	90.3
MARCH	4065	4573	4632	4875	4992	6008	5958	5041	5052	99.8	93.2
APRIL	4360	4992	5001	5047	5219	6411	6152	5308	5334	99.5	98.2
MAY	5160	5581	5144	5227	5367	6601	6724	5650	5549	101.8	104.5
JUNE	4978	5437	5481	5710	5909	7088	7211	6008	5977	100.5	111.1
JULY	5340	6065	6069	5879	6452	7795	7614	6448	6434	100.2	119.3
AUGUST	4735	5198	5164	5488	5603	6833	6804	5663	5626	100.7	104.8
SEPTEMBER	4612	5197	4851	5120	5230	6445	6151	5434	5420	100.3	100.5
OCTOBER	4507	4923	4935	5108	5306	6435	5961	5260	5304	99.2	97.3
NOVEMBER	4044	4791	4992	5429	5115	6538	6344	5319	5364	99.2	98.4
DECEMBER	4270	4659	5215	5505	5586	6590	6076	5437	5562	97.8	100.6
DAILY AVERAGE FOR YEAR	4427	5060	4999	5204	5342	6506	6325	5406	5422	99.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	81.9	93.6	92.5	96.3	98.8	120.3	117.0				

Station: 33-304 **Route:** 0089 (A00089)
Location: SR 89, North of Garden CIty
Accum. Mileage: 415.84

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	575	592	530	540	496	581	762	581	549	105.8	34.1
FEBRUARY	834	752	509	524	539	664	825	664	597	111.2	39.0
MARCH	798	710	542	607	564	888	834	704	665	105.9	41.3
APRIL	1104	905	843	914	916	985	1141	983	913	107.7	57.7
MAY	1982	1368	1204	1227	1324	1588	2068	1511	1332	113.4	88.7
JUNE	2763	1948	1881	1853	1828	2187	3009	2196	1946	112.8	128.9
JULY	4850	5934	3353	3402	3456	4796	6330	4697	4271	110.0	275.8
AUGUST	4846	2694	2559	2873	4058	4968	7434	4104	3396	120.8	241.0
SEPTEMBER	3029	1818	1829	1808	1873	2415	3327	2338	1971	118.6	137.3
OCTOBER	1306	894	930	917	1016	1402	1688	1153	1021	112.9	67.7
NOVEMBER	707	599	654	744	681	909	954	747	717	104.2	43.9
DECEMBER	618	634	539	650	632	737	680	645	643	100.3	37.9
DAILY AVERAGE FOR YEAR	1926	1619	1283	1340	1474	1821	2456	1703	1508	112.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	113.1	95.1	75.3	78.7	86.6	106.9	144.2				

Station: 41-305 **Route:** 0024 (A00024)
Location: SR 24, North of Sigurd
Accum. Mileage: 7.90

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1048	1827	1890	1884	1863	2098	1687	1740	1907	91.2	78.6
FEBRUARY	1197	2030	1988	1974	1955	2269	1841	1893	2043	92.7	85.5
MARCH	1299	2124	2193	2107	2145	2410	1993	2056	2199	93.5	92.8
APRIL	1509	2190	2147	2238	2476	2594	2049	2146	2329	92.1	96.9
MAY	1793	2427	2329	2274	2419	2898	2480	2371	2453	96.7	107.0
JUNE	1900	2568	2510	2560	2629	3081	2430	2547	2686	94.8	115.0
JULY	2033	2649	2509	2620	2640	3015	2632	2571	2685	95.8	116.1
AUGUST	2043	2502	2436	2481	2603	3012	2592	2522	2593	97.3	113.9
SEPTEMBER	1754	2464	2366	2358	2468	2946	2307	2397	2541	94.3	108.2
OCTOBER	1783	2375	2365	2338	2504	2909	2176	2333	2486	93.8	105.3
NOVEMBER	1388	2167	2220	2208	1932	2310	1958	2029	2159	94.0	91.6
DECEMBER	1189	2056	2066	2100	2153	2395	1841	1956	2165	90.3	88.3
DAILY AVERAGE FOR YEAR	1572	2285	2252	2262	2316	2665	2169	2215	2356	94.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	71.0	103.2	101.7	102.1	104.6	120.3	97.9				

Station: 49-306 **Route:** 0015 (A00015)
Location: I-15, North of Center Street Interchange
Accum. Mileage: 265.72

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	33600	59704	62761	63969	64023	70968	54579	57886	64007	90.4	81.5
FEBRUARY	38885	67940	64329	67867	69195	77248	59438	63558	69316	91.7	89.5
MARCH	44037	70175	70523	71916	72804	80230	63126	68264	73371	93.0	96.1
APRIL	47652	72878	71392	75043	77509	81191	64867	69155	75603	91.5	97.4
MAY	49010	72366	72648	73193	75797	83550	68269	70888	75149	94.3	99.8
JUNE	52378	77286	76716	79113	81897	88396	73569	76257	81087	94.0	107.4
JULY	51193	78968	79551	79649	80597	82138	76599	74888	80123	93.5	105.5
AUGUST	54513	81515	81392	83249	86006	93381	76683	79923	84905	94.1	112.6
SEPTEMBER	53389	78112	79201	79852	81981	89712	75053	77132	82150	93.9	108.6
OCTOBER	50922	76795	77540	79030	81550	88803	70282	74353	80419	92.5	104.7
NOVEMBER	45930	74501	77027	77353	77118	82163	69346	72274	77597	93.1	101.8
DECEMBER	39454	69713	72621	73798	76184	78288	64496	67111	74319	90.3	94.5
DAILY AVERAGE FOR YEAR	46541	73224	73791	75420	77240	83094	68197	71005	76554	92.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	65.5	103.1	103.9	106.2	108.8	117.0	96.0				

Station: 29-307 **Route:** 0084 (A00084)
Location: I-84, East of Mountain Green
Accum. Mileage: 55.19

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	5336	6635	6508	6778	6791	7399	7469	6650	6799	97.8	74.0
FEBRUARY	6284	7030	6285	7177	7228	8166	8066	7177	7177	100.0	79.9
MARCH	6509	7173	7228	7577	7615	8439	7967	7537	7642	98.6	83.9
APRIL	7610	7733	7670	8063	8474	9234	8937	8248	8235	100.2	91.8
MAY	8730	9026	8285	8624	8771	10144	10217	9068	8927	101.6	100.9
JUNE	10310	9302	9449	9965	10245	12027	12228	10546	10283	102.6	117.4
JULY	11372	10722	10419	10474	10988	12862	13273	11478	11075	103.6	127.8
AUGUST	11552	9818	10123	10576	11044	13065	13842	11349	10880	104.3	126.3
SEPTEMBER	9535	10271	9252	9415	9580	11449	11665	10259	10063	101.9	114.2
OCTOBER	8615	8796	8969	9073	9215	10393	10216	9274	9252	100.2	103.2
NOVEMBER	6684	7763	7781	8478	8361	9181	8839	8173	8322	98.2	91.0
DECEMBER	6328	7104	7837	8229	8249	9084	8549	7919	8147	97.2	88.1
DAILY AVERAGE FOR YEAR	8202	8474	8329	8711	8914	10130	10144	8984	8912	100.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	91.3	94.3	92.7	97.0	99.2	112.8	112.9				

Station: 51-308 **Route:** 0040 (A00040)
Location: SR 40, Daniel's Canyon
Accum. Mileage: 20.51

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2482	2443	1931	1942	1977	2728	3487	2413	2203	109.5	59.7
FEBRUARY	3003	2428	1894	2118	2315	3108	3581	2635	2373	111.0	65.2
MARCH	3069	2195	2187	2237	2291	3083	3392	2627	2417	108.7	65.0
APRIL	3536	2400	2406	2528	2707	3505	3711	3014	2709	111.3	74.6
MAY	5761	4514	2993	3154	3295	4923	6116	4313	3747	115.1	106.7
JUNE	7283	4015	3821	3991	4244	6226	7474	5289	4530	116.8	130.9
JULY	8313	5792	4788	4231	4840	6950	8440	6321	5343	118.3	156.4
AUGUST	7986	4238	3967	4171	4711	6887	8097	5583	4728	118.1	138.2
SEPTEMBER	6920	5368	3565	3584	3795	5868	7069	5254	4504	116.7	130.0
OCTOBER	6094	3346	3629	3572	4151	5995	6595	4729	4079	115.9	117.0
NOVEMBER	3797	2410	2502	3172	2974	4265	4749	3387	3065	110.5	83.8
DECEMBER	2749	2189	2495	2492	2562	3275	3662	2819	2634	107.0	69.8
DAILY AVERAGE FOR YEAR	5040	3489	3024	3106	3340	4725	5546	4041	3537	114.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	124.7	86.3	74.8	76.9	82.7	116.9	137.2				

Station: 43-309 **Route:** 0080 (A00080)
Location: I-80, East of Echo Interchange
Accum. Mileage: 165.94

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	7488	6969	6553	7036	7000	7623	8368	7263	7011	103.6	67.3
FEBRUARY	8505	7256	6186	7762	7799	8628	9293	7918	7526	105.2	73.4
MARCH	9015	7443	7797	8546	8675	9411	10102	8728	8440	103.4	80.9
APRIL	10058	7858	7765	9212	9611	10214	11096	9480	8932	106.1	87.9
MAY	11871	10384	9437	10421	10390	11871	12444	10887	10446	104.2	100.9
JUNE	15162	10849	11560	12550	12658	14857	15463	13330	12610	105.7	123.6
JULY	17729	14184	13165	13081	13672	16179	18486	15367	14062	109.3	142.4
AUGUST	17567	12333	12241	13262	13835	16290	17669	14585	13530	107.8	135.2
SEPTEMBER	14531	12985	10440	11375	11614	14079	14641	12913	12193	105.9	119.7
OCTOBER	12261	10198	10726	10804	10623	11921	12589	11280	10819	104.3	104.6
NOVEMBER	10050	7542	7908	9405	8473	9203	10483	9004	8545	105.4	83.5
DECEMBER	9298	6640	7455	8046	8044	8936	10200	8481	7877	107.7	78.6
DAILY AVERAGE FOR YEAR	11905	9621	9306	10147	10254	11618	12649	10789	10189	105.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	110.3	89.2	86.3	94.0	95.0	107.7	117.2				

Station: 03-310 **Route:** 0015 (A00015)
Location: I-15, South of Plymouth
Accum. Mileage: 385.73

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	5261	5744	5046	5232	5189	6518	5630	5501	5532	99.4	74.3
FEBRUARY	5973	6246	5107	5438	5841	7669	6554	6118	6060	101.0	82.6
MARCH	7194	5981	5683	6171	6499	8593	7726	6860	6651	103.1	92.7
APRIL	7456	6379	5976	6304	6839	8849	7849	7130	6869	103.8	96.3
MAY	7437	7310	6318	6537	6772	9122	7898	7282	7148	101.9	98.4
JUNE	8805	7111	7392	7698	8271	10776	9255	8543	8365	102.1	115.4
JULY	10120	9230	8395	8771	8805	11467	11115	9744	9328	104.5	131.6
AUGUST	10200	8061	7964	8227	8919	11453	10776	9274	8852	104.8	125.3
SEPTEMBER	8642	6725	6681	6781	7096	9504	8136	7730	7460	103.6	104.4
OCTOBER	7545	6166	5854	6407	6860	8811	7440	6964	6746	103.2	94.1
NOVEMBER	7517	6238	5330	7344	6418	8067	7646	6934	6698	103.5	93.7
DECEMBER	5648	5251	6330	6671	7115	8153	7259	6670	6773	98.5	90.1
DAILY AVERAGE FOR YEAR	7608	6735	6336	6819	7089	9095	8144	7404	7215	102.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	102.8	91.0	85.6	92.1	95.7	122.8	110.0				

Station: 49-312 **Route:** 0006 (A00006)
Location: SR 6, Southeast of Moark Junction
Accum. Mileage: 166.32

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	5007	5300	4493	4560	4349	5789	6323	5099	4898	104.1	61.9
FEBRUARY	6455	6226	4531	4983	5221	7372	7758	6078	5667	107.3	73.7
MARCH	7415	5861	5620	5891	6054	8240	8217	6754	6385	105.8	81.9
APRIL	9024	6692	6044	6621	7738	9045	9004	7823	7228	108.2	94.9
MAY	10774	9152	6858	7299	7270	10397	11403	8901	8140	109.3	108.0
JUNE	11418	8682	7951	8370	9419	12142	12916	10172	9446	107.7	123.4
JULY	12007	9283	9603	9642	10780	13429	14189	11329	10487	108.0	137.5
AUGUST	11958	9142	8438	9052	9471	12386	13425	10402	9605	108.3	126.2
SEPTEMBER	11818	7911	7225	7715	8113	11144	11907	9546	8551	111.6	115.8
OCTOBER	11952	7331	7029	7485	7606	12205	10502	9121	8227	110.9	110.7
NOVEMBER	7820	5766	6675	6318	6455	8036	7475	6898	6626	104.1	83.7
DECEMBER	5858	6122	5925	6639	6854	7320	7429	6619	6608	100.2	80.3
DAILY AVERAGE FOR YEAR	9243	7326	6700	7055	7475	9786	10091	8242	7668	107.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	112.1	88.9	81.3	85.6	90.7	118.7	122.4				

Station: 27-313 **Route:** 0015 (A00015)
Location: I-15, South of Scipio
Accum. Mileage: 183.75

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6717	6679	5382	5626	5710	7214	5991	6195	6114	101.3	73.5
FEBRUARY	8026	7259	5541	6155	6824	9264	7201	7181	7008	102.5	85.2
MARCH	9936	6665	6559	7193	8185	9745	8018	8075	7761	104.0	95.8
APRIL	10817	7778	6848	7995	9799	10685	8698	9000	8621	104.4	106.7
MAY	9104	8484	6923	7259	8363	10678	8406	8372	8239	101.6	99.3
JUNE	11339	8236	7906	8802	9490	11823	9998	9723	9379	103.7	115.3
JULY	11122	9062	8883	9136	9483	11385	11183	10077	9565	105.4	119.5
AUGUST	11747	8467	8139	8607	9611	11444	10550	9697	9193	105.5	115.0
SEPTEMBER	9815	8557	7021	7372	7989	10776	8763	8690	8459	102.7	103.0
OCTOBER	9861	6973	6626	7707	8801	10499	8161	8322	8001	104.0	98.7
NOVEMBER	11571	6287	6647	8790	7543	8736	8592	8300	7652	108.5	98.4
DECEMBER	6912	5293	7171	7472	7950	9217	8108	7507	7506	100.0	89.0
DAILY AVERAGE FOR YEAR	9685	7503	6955	7698	8343	10143	8681	8433	8128	103.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	114.8	89.0	82.5	91.3	98.9	120.3	102.9				

Station: 49-314 **Route:** 0006 (A00006)
Location: SR 6, West of Helper
Accum. Mileage: 201.65

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	3372	3596	3363	3536	3597	4552	4257	3723	3706	100.5	64.5
FEBRUARY	4439	4402	3381	3890	4054	5471	5054	4384	4240	103.4	75.9
MARCH	5568	4420	4235	4469	4735	6379	5678	5081	4893	103.8	88.0
APRIL	6690	5224	4582	5128	6031	7351	6320	5944	5663	105.0	103.0
MAY	6843	6779	5022	5240	5833	8185	7029	6347	6142	103.3	109.9
JUNE	7715	6514	5853	6515	6965	8771	7869	7218	7009	103.0	125.0
JULY	7520	6764	6316	6678	6734	8301	8281	7256	6949	104.4	125.7
AUGUST	7677	6352	5920	6330	6679	8042	7887	6919	6618	104.5	119.9
SEPTEMBER	6908	6490	5402	5537	5896	7723	6904	6469	6281	103.0	112.1
OCTOBER	6821	5138	4850	5374	6102	7392	6598	5997	5700	105.2	103.9
NOVEMBER	5775	4426	4035	5368	4842	5255	5785	5072	4814	105.4	87.9
DECEMBER	3992	3888	4604	4697	4759	5811	5506	4785	4802	99.6	82.9
DAILY AVERAGE FOR YEAR	6069	5351	4796	5240	5541	6954	6455	5773	5576	103.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	105.1	92.7	83.1	90.8	96.0	120.5	111.8				

Station: 11-315 **Route:** 0015 (A00015)
Location: I-15, South of Lagoon Interchange
Accum. Mileage: 319.77

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	48746	88788	98318	93006	97240	106085	77138	86230	96402	89.4	84.7
FEBRUARY	61716	100498	95008	105211	108279	116528	94921	97451	105105	92.7	95.7
MARCH	66506	101579	103015	106244	106484	118785	98455	101154	107649	94.0	99.3
APRIL	75925	101670	105147	104396	107092	116241	95742	99884	106909	93.4	98.1
MAY	71070	98753	104570	105228	107092	117074	100030	100768	106062	95.0	99.0
JUNE	79207	109715	111356	113964	116610	127517	107066	110196	116399	94.7	108.2
JULY	79049	106341	113677	116889	119926	126783	105225	108457	116229	93.3	106.5
AUGUST	85616	116248	121000	121733	127396	136055	118005	118527	124342	95.3	116.4
SEPTEMBER	71319	100085	101719	102764	105770	113497	95843	99111	105183	94.2	97.3
OCTOBER	65471	98895	106603	107451	109201	117306	95388	99104	107424	92.3	97.3
NOVEMBER	65676	105547	108709	109618	113761	125648	101010	104775	112569	93.1	102.9
DECEMBER	62711	86760	102188	108515	111094	116561	89984	96145	105573	91.1	94.4
DAILY AVERAGE FOR YEAR	69131	101006	106072	108133	111231	119782	98116	101834	109245	93.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	67.9	99.2	104.2	106.2	109.2	117.6	96.3				

Station: 11-316 **Route:** 0089 (A00089)
Location: SR 89, Two Miles South of SR 193
Accum. Mileage: 342.46

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	14904	23069	24701	25628	24766	26050	21663	22768	24756	92.0	91.5
FEBRUARY	16434	25057	23860	26164	26597	28383	22545	24149	26012	92.8	97.0
MARCH	16851	25594	26021	26287	26697	27816	21758	24674	26542	93.0	99.2
APRIL	17809	24150	24571	25298	25912	26929	23913	23868	25372	94.1	95.9
MAY	19459	25264	25536	26183	26278	27092	24073	24920	26017	95.8	100.1
JUNE	21726	26423	26888	27474	27632	29397	26755	26740	27649	96.7	107.5
JULY	20609	26163	26463	27874	28524	28470	25797	26070	27435	95.0	104.8
AUGUST	20936	27121	27405	27436	27646	29364	27491	26841	27755	96.7	107.9
SEPTEMBER	19539	25717	26353	26855	27138	28337	25955	25796	26949	95.7	103.7
OCTOBER	18057	25978	26713	26387	26647	28186	23729	24953	26743	93.3	100.3
NOVEMBER	15782	25908	26120	27215	25700	26488	22195	24351	26302	92.6	97.9
DECEMBER	17207	23799	24152	25491	25278	26848	22342	23447	25196	93.1	94.2
DAILY AVERAGE FOR YEAR	18223	25336	25759	26544	26595	27805	24055	24884	26408	94.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	73.2	101.8	103.5	106.7	106.9	111.7	96.7				

Station: 35-317 **Route:** 0210 (A00210)
Location: SR 210, Little Cottonwood Canyon
Accum. Mileage: 3.86

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	8857	6799	5513	5717	6748	8165	10113	7381	6549	112.7	128.5
FEBRUARY	9390	7598	5472	6646	7701	9133	9622	7937	7310	108.6	138.2
MARCH	9065	7441	6573	6703	7044	8630	9422	7803	7302	106.9	135.9
APRIL	5990	4758	4966	4790	5010	4879	6704	5369	4880	110.0	93.5
MAY	4761	3441	2842	3273	3384	3288	4641	3615	3237	111.7	63.0
JUNE	7244	4436	4770	4713	4466	3953	6738	5123	4444	115.3	89.2
JULY	6232	5618	8008	4077	4608	5555	6359	5808	5575	104.2	101.1
AUGUST	6576	4126	4581	4796	4806	5549	5964	5154	4766	108.1	89.8
SEPTEMBER	7747	3435	3672	3784	4008	4987	6968	5012	4025	124.5	87.3
OCTOBER	7383	3883	3808	3662	3941	4559	6972	4900	3959	123.8	85.3
NOVEMBER	3220	2938	3389	3608	3532	3827	4364	3555	3469	102.5	61.9
DECEMBER	7976	6475	6462	6576	6591	8457	8146	7333	6986	105.0	127.7
DAILY AVERAGE FOR YEAR	7060	5068	4942	4842	5139	5961	7158	5742	5190	110.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	123.0	88.3	86.1	84.3	89.5	103.8	124.7				

Station: 43-318 **Route:** 0080 (A00080)
Location: I-80, Northeast of Coalville Interchange
Accum. Mileage: 160.96

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6960	6839	6608	6231	6929	7856	8125	7052	6877	102.5	67.5
FEBRUARY	6111	6262	7226	7588	7846	8514	6678	7175	7487	95.8	68.7
MARCH	8387	7804	8013	8408	8650	9301	9434	8592	8481	101.3	82.2
APRIL	9266	8196	8220	9091	9514	10331	10364	9319	9070	102.7	89.2
MAY	11280	10817	9359	9969	10530	11737	11998	10739	10426	103.0	102.8
JUNE	13870	10827	11318	11791	12220	14174	14294	12679	12169	104.2	121.3
JULY	16526	14074	13176	12710	12985	15560	17760	14823	13719	108.0	141.9
AUGUST	17434	12339	12320	13207	13949	16621	18171	14698	13618	107.9	140.7
SEPTEMBER	13842	13011	10481	11011	11571	14146	14262	12723	12144	104.8	121.8
OCTOBER	12195	9787	10374	10475	10852	11986	12132	11083	10639	104.2	106.1
NOVEMBER	8892	7184	8107	7667	6901	8473	8390	7901	7632	103.5	75.6
DECEMBER	7920	7902	7726	7861	8389	8976	9138	8312	8209	101.3	79.5
DAILY AVERAGE FOR YEAR	11011	9648	9430	9679	10059	11486	11817	10449	10060	103.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	105.4	92.3	90.2	92.6	96.3	109.9	113.1				

Station: 49-319 **Route:** 0189 (A00189)
Location: SR 189, Provo Canyon
Accum. Mileage: 11.17

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	5197	6159	5219	5163	5426	6679	8609	6012	5725	105.0	65.8
FEBRUARY	6553	6166	4941	5524	6005	7122	8470	6397	5951	107.5	70.1
MARCH	8389	5955	5934	5976	6642	7697	9381	7104	6484	109.6	77.8
APRIL	8482	6843	6607	7012	7233	8595	9111	7771	7258	107.1	85.1
MAY	10220	8887	7188	7626	7513	9224	11062	8728	8063	108.2	95.6
JUNE	12617	9263	9159	9539	9734	11610	13926	10824	9935	108.9	118.5
JULY	14090	12207	12007	10917	11532	13607	16409	13090	12061	108.5	143.3
AUGUST	14061	10309	10671	11377	11971	14559	18012	12834	11720	109.5	140.5
SEPTEMBER	11676	11980	8525	8884	9062	12573	15774	11408	10317	110.6	124.9
OCTOBER	11396	8032	8178	8453	9003	11327	12979	9841	8917	110.4	107.8
NOVEMBER	6806	6316	6783	7741	7258	9180	10015	7713	7460	103.4	84.5
DECEMBER	6923	6510	6686	7048	7000	8799	9825	7636	7284	104.8	83.6
DAILY AVERAGE FOR YEAR	9655	8265	7670	7957	8252	10088	12027	9132	8446	108.1	
% DAILY AVE. OF YEAR DAILY AVERAGE	105.7	90.5	84.0	87.1	90.4	110.5	131.7				

Station: 57-320 **Route:** 0039 (A00039)
Location: SR 39, Ogden Canyon
Accum. Mileage: 8.73

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6119	6045	5879	5918	6043	7597	8497	6530	6266	104.2	89.2
FEBRUARY	5988	5761	5440	6188	5965	7274	7515	6304	6126	102.9	86.1
MARCH	5846	5758	5782	5894	5893	6672	6605	6073	6020	100.9	83.0
APRIL	6721	6050	6147	6230	6097	6675	7123	6467	6240	103.6	88.3
MAY	10981	6400	6407	6949	7596	8459	10274	8001	7087	112.9	109.3
JUNE	10167	7985	7603	7579	7912	9194	10569	8705	8100	107.5	118.9
JULY	10694	8507	9815	8308	8662	10195	11134	9664	9069	106.6	132.0
AUGUST	9985	7724	8215	8237	8053	9353	11432	8919	8297	107.5	121.8
SEPTEMBER	9034	6860	6798	7150	6978	8725	9857	8006	7370	108.6	109.4
OCTOBER	7099	6609	6679	6706	6597	7521	7677	6966	6806	102.4	95.2
NOVEMBER	4574	5791	6037	6131	5800	6382	6187	5851	6023	97.1	79.9
DECEMBER	5457	5385	6238	6568	6712	7078	6328	6256	6428	97.3	85.5
DAILY AVERAGE FOR YEAR	7675	6597	6757	6820	6863	7926	8601	7321	6993	104.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	104.8	90.1	92.3	93.2	93.7	108.3	117.5				

Station: 49-321 **Route:** 0006 (A00006)
Location: SR 6, West of Elberta Junction
Accum. Mileage: 141.44

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	706	839	754	753	783	897	1072	823	804	102.4	72.3
FEBRUARY	1017	850	648	768	854	991	1265	913	822	111.1	80.2
MARCH	1147	884	862	857	876	1119	1430	1018	923	110.3	89.5
APRIL	1494	941	892	912	1078	1372	1856	1251	1039	120.4	109.9
MAY	1484	1283	944	913	1028	1333	1873	1244	1093	113.8	109.3
JUNE	1409	1097	1108	1071	1072	1305	1627	1238	1136	109.0	108.8
JULY	1185	1114	1079	1073	1076	1292	1373	1176	1126	104.4	103.3
AUGUST	1257	1058	1061	1055	1169	1346	1571	1205	1132	106.4	105.9
SEPTEMBER	1441	1230	1030	1026	1093	1483	1828	1328	1187	111.9	116.7
OCTOBER	1416	1051	1007	1058	1096	1478	1715	1250	1128	110.8	109.8
NOVEMBER	1174	940	936	1099	1065	1337	1637	1164	1076	108.2	102.3
DECEMBER	944	925	985	952	997	1149	1228	1033	1008	102.5	90.8
DAILY AVERAGE FOR YEAR	1216	1022	942	963	1018	1259	1542	1138	1041	109.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	106.9	89.8	82.8	84.6	89.5	110.6	135.5				

Station: 35-322 **Route:** 0190 (A00190)
Location: SR 190, Big Cottonwood Canyon
Accum. Mileage: 2.46

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6766	5612	3308	3602	3583	5152	8715	5246	4270	122.9	120.6
FEBRUARY	7810	5040	3140	3974	4348	5674	8276	5466	4435	123.2	125.7
MARCH	6857	4177	3829	3922	3908	4964	7137	4902	4174	117.4	112.7
APRIL	4502	2722	2810	2705	2715	2548	4319	3270	2700	121.1	75.2
MAY	5524	2357	2373	2466	2415	2596	4238	3067	2436	125.9	70.5
JUNE	5959	3211	2950	2950	2821	2960	5158	3661	2970	123.3	84.2
JULY	7844	4591	4801	3799	4152	4830	6761	5365	4442	120.8	123.3
AUGUST	7585	3987	3979	4029	4155	5335	7439	5103	4265	119.6	117.3
SEPTEMBER	6298	4279	3048	3270	3253	3778	6218	4352	3538	123.0	100.0
OCTOBER	5911	2570	2519	2541	2622	3202	4443	3427	2677	128.0	78.8
NOVEMBER	3725	2437	2416	2631	2868	3556	4312	3109	2779	111.9	71.5
DECEMBER	5999	4194	4339	4377	4686	6083	6352	5244	4800	109.2	120.6
DAILY AVERAGE FOR YEAR	6229	3766	3274	3348	3459	4240	6099	4350	3617	120.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	143.2	86.6	75.3	77.0	79.5	97.5	140.2				

Station: 45-323 **Route:** 0080 (A00080)
Location: I-80, East of Delle Interchange
Accum. Mileage: 69.54

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	7306	5516	4591	4945	5022	5925	7912	5880	5186	113.4	75.5
FEBRUARY	8326	5257	5229	5457	5670	6676	9345	6566	5658	116.0	84.3
MARCH	8776	5731	5791	6083	6373	7340	9480	7035	6307	111.5	90.3
APRIL	9108	5763	5864	6453	6663	8121	9679	7513	6573	114.3	96.5
MAY	9703	7260	6779	7176	7386	8330	10029	7996	7345	108.9	102.7
JUNE	10596	7836	8127	8197	8405	9359	10628	9012	8430	106.9	115.7
JULY	11319	8572	8619	8772	9262	10610	11203	9823	9139	107.5	126.1
AUGUST	11418	8341	8628	9053	9293	9939	11650	9686	9043	107.1	124.4
SEPTEMBER	9950	7171	7474	7621	7732	8536	10187	8447	7746	109.0	108.4
OCTOBER	10307	7207	7301	7713	8035	8800	10320	8502	7761	109.5	109.2
NOVEMBER	8319	5294	6041	6652	6703	7160	6398	6654	6398	104.0	85.4
DECEMBER	6085	4489	5739	6221	6526	7265	7023	6250	6106	102.4	80.2
DAILY AVERAGE FOR YEAR	9226	6583	6693	7045	7290	8168	9491	7789	7156	108.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	118.4	84.5	85.9	90.4	93.6	104.9	121.9				

Station: 37-324 **Route:** 0666 (A00666)
Location: SR 666, West of Eastland Road
Accum. Mileage: 1.70

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1277	1249	1198	1258	1171	1341	1430	1272	1241	102.5	66.1
FEBRUARY	1505	1287	1241	1378	1346	1575	1647	1425	1365	104.4	74.1
MARCH	1800	1441	1452	1698	1683	1894	1936	1706	1650	103.4	88.7
APRIL	1959	1645	1665	1863	1885	2097	2155	1906	1831	104.1	99.1
MAY	2099	1946	1884	1968	1958	2335	2274	2053	2007	102.3	106.8
JUNE	2446	2124	2081	2235	2253	2631	2544	2338	2281	102.5	121.6
JULY	2482	2284	2201	2402	2356	2625	2832	2462	2369	103.9	128.0
AUGUST	2462	2180	2138	2270	2373	2539	2536	2347	2295	102.3	122.0
SEPTEMBER	2266	1999	1904	2007	2151	2516	2586	2227	2134	104.4	115.8
OCTOBER	2021	1694	1635	1883	1971	2133	2048	1900	1845	103.0	98.8
NOVEMBER	1874	1549	1688	1959	1784	1914	1789	1799	1787	100.7	93.6
DECEMBER	1398	1098	1514	1658	1756	1864	1942	1617	1592	101.6	84.1
DAILY AVERAGE FOR YEAR	1953	1715	1717	1889	1901	2130	2161	1923	1870	102.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	101.6	89.2	89.3	98.2	98.9	110.8	112.4				

Station: 35-325 **Route:** 0089 (A00089)
Location: SR 89, 1087 South State Street
Accum. Mileage: 325.62

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	18926	28666	31233	31188	31238	38540	34252	30161	31971	94.3	89.2
FEBRUARY	22646	31009	31466	32242	32369	41432	37237	32629	33703	96.8	96.5
MARCH	21139	32267	32124	32548	32692	41286	36105	32876	34356	95.7	97.2
APRIL	22330	33230	33161	33219	33718	41088	38451	33385	34883	95.7	98.7
MAY	24010	30903	33626	34042	33724	40641	37350	33411	34361	97.2	98.8
JUNE	26230	34982	35110	35024	35560	41151	39165	35520	36546	97.2	105.0
JULY	27115	34264	32544	35928	36118	42054	38873	35091	36090	97.2	103.7
AUGUST	28075	35423	35004	34837	36030	43540	41784	36279	36748	98.7	107.2
SEPTEMBER	27135	32292	35309	35708	35715	43280	42051	36376	36785	98.9	107.5
OCTOBER	24366	34832	35481	36001	36889	43228	39875	35399	37093	95.4	104.6
NOVEMBER	21515	33460	33312	34427	30581	39866	37002	32856	34163	96.2	97.1
DECEMBER	21551	27961	32169	32747	33764	40314	34827	31936	33720	94.7	94.4
DAILY AVERAGE FOR YEAR	23669	32420	33413	33990	34009	41379	38117	33829	35042	96.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	70.0	95.8	98.8	100.5	100.5	122.3	112.7				

Station: 49-327 **Route:** 0006 (A00006)
Location: SR 6, North of SR 147 in Spanish Fork
Accum. Mileage: 162.47

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	5500	7013	6838	7179	7398	7897	7115	6939	7234	95.9	58.2
FEBRUARY	6832	8669	8146	8379	8418	9424	9699	8510	8607	98.9	71.4
MARCH	10502	9332	9199	9792	10534	12372	11649	10523	10331	101.9	88.3
APRIL	10571	10601	10101	10596	10587	13560	12823	11292	11089	101.8	94.8
MAY	10481	12470	10676	11301	12243	14889	13805	12190	12207	99.9	102.3
JUNE	11895	13199	12879	13618	13892	16810	15753	14096	14195	99.3	118.3
JULY	12582	12802	13262	13579	14113	16832	16564	14222	14055	101.2	119.4
AUGUST	12998	13129	12712	13349	13727	16465	13088	13602	13796	98.6	114.2
SEPTEMBER	13223	12517	11548	11994	12726	15687	14609	13317	13027	102.2	111.8
OCTOBER	12139	12619	12505	12995	13928	16493	15376	13596	13604	99.9	114.1
NOVEMBER	9989	11652	11734	13029	11955	13746	13581	12258	12429	98.6	102.9
DECEMBER	8768	11012	12210	12508	12692	14478	13606	12192	12670	96.2	102.3
DAILY AVERAGE FOR YEAR	10405	11249	10961	11553	11903	14115	13236	11913	11956	99.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	87.3	94.4	92.0	97.0	99.9	118.5	111.1				

Station: 57-329 **Route:** 0089 (A00089)
Location: SR 89, Washington Blvd & Riverdale Road
Accum. Mileage: 353.77

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	15257	24722	24834	25229	25634	31504	27847	24675	26239	94.0	93.8
FEBRUARY	15940	26277	25598	26455	26448	32400	28826	25992	27436	94.7	98.9
MARCH	18237	27995	28642	28477	29770	34616	30299	28549	30038	95.0	108.6
APRIL	17607	27885	28864	28911	28835	35301	31291	28122	29959	93.9	107.0
MAY	18028	25822	26968	27447	26888	31890	28400	26516	27665	95.8	100.8
JUNE	18537	28316	27484	27251	28397	32504	28689	27520	28941	95.1	104.7
JULY	17871	25995	24873	27284	27856	30564	25854	25513	27252	93.6	97.0
AUGUST	17450	26675	27288	26835	27058	31079	26591	26228	27692	94.7	99.8
SEPTEMBER	16933	24088	26176	26149	26424	31561	27036	25735	27102	95.0	97.9
OCTOBER	16401	26144	26060	26020	26279	31609	27363	25423	27120	93.7	96.7
NOVEMBER	15580	26001	26017	26406	23766	30665	27591	25142	26436	95.1	95.6
DECEMBER	17267	23812	26552	27170	27618	32400	28105	26112	27743	94.1	99.3
DAILY AVERAGE FOR YEAR	17072	26108	26588	26994	27094	32220	28151	26293	27801	94.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	64.9	99.3	101.1	102.7	103.0	122.5	107.1				

Station: 35-332 **Route:** 0186 (A00186)
Location: SR 186, Foothill Blvd South of Sunnyside Ave
Accum. Mileage: 9.03

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	23187	48966	52778	54476	54257	53149	36441	45740	52557	87.0	98.4
FEBRUARY	25230	49951	51640	54598	56033	54047	36619	46874	53254	88.0	100.9
MARCH	25764	52193	52741	53470	53194	52846	36118	47252	52925	89.3	101.7
APRIL	27691	52874	55451	57300	57663	59197	37730	48568	56497	86.0	104.5
MAY	27776	53283	54049	54498	55549	58198	33856	48731	54963	88.7	104.9
JUNE	28355	49341	48622	48474	50637	52500	34025	45032	50065	89.9	96.9
JULY	29376	50121	52828	53320	53699	56571	33470	46145	53156	86.8	99.3
AUGUST	25776	48537	49539	49938	50534	52422	35656	45149	50169	90.0	97.2
SEPTEMBER	28720	47326	50759	51575	51252	56532	40283	46753	51729	90.4	100.6
OCTOBER	26494	54175	55922	57277	54604	54743	40924	48811	55317	88.2	105.0
NOVEMBER	23473	53941	55346	56468	48028	44529	32436	45379	51716	87.7	97.6
DECEMBER	24727	44215	48622	51638	50702	52411	34943	43261	49655	87.1	93.1
DAILY AVERAGE FOR YEAR	26373	50505	52413	53587	52827	53901	36085	46472	52646	88.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	56.8	108.7	112.8	115.3	113.7	116.0	77.6				

Station: 35-333 **Route:** 0071 (A00071)
Location: SR 71, 700 East & 1200 South
Accum. Mileage: 12.71

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	19609	45613	45416	46308	45214	48454	34266	40328	46139	87.4	95.4
FEBRUARY	22457	41585	44968	46353	46390	48859	34062	40668	45631	89.1	96.2
MARCH	21923	45022	46000	46411	46342	49678	33767	41903	46793	89.5	99.1
APRIL	21911	46180	47068	47283	47546	48936	34839	41060	47402	86.6	97.1
MAY	23393	42039	47617	46881	47143	49178	34218	41884	46433	90.2	99.1
JUNE	23286	45773	47186	46391	47925	49926	35791	42765	47575	89.9	101.2
JULY	23080	47656	49031	50555	50773	52546	33612	43012	49995	86.0	101.8
AUGUST	24142	46764	47485	47040	47540	50299	36158	43218	47764	90.5	102.2
SEPTEMBER	23605	41528	47821	48644	48183	51317	36648	42632	47681	89.4	100.9
OCTOBER	24119	47423	48616	48329	48739	51489	37671	43410	48837	88.9	102.7
NOVEMBER	22565	48349	49236	50022	43304	48373	35467	42753	47748	89.5	101.1
DECEMBER	24989	42001	48062	49584	50583	53407	38678	43429	48950	88.7	102.7
DAILY AVERAGE FOR YEAR	22906	45047	47368	47799	47382	50273	35471	42268	47574	88.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	54.2	106.6	112.1	113.1	112.1	118.9	83.9				

Station: 35-335 **Route:** 0173 (A00173)
Location: SR 173, 5400 South & 900 West 1200 South
Accum. Mileage: 7.92

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	12402	20816	21882	22474	22643	24280	22427	20735	22322	92.9	81.0
FEBRUARY	13926	23415	22465	23074	23592	25388	22908	22110	23587	93.7	86.3
MARCH	14342	24053	23655	24079	23828	25794	23105	22875	24319	94.1	89.3
APRIL	14801	24575	24180	24254	24818	25796	24002	22950	24724	92.8	89.6
MAY	15101	23223	24820	25333	25197	26477	23986	23546	24938	94.4	91.9
JUNE	15742	25068	25657	25374	25920	27353	23818	24300	25944	93.7	94.9
JULY	14895	24319	22090	26799	26834	28511	23069	23495	25644	91.6	91.7
AUGUST	17969	30675	32331	31629	32094	33437	27684	29656	32031	92.6	115.8
SEPTEMBER	17671	25648	32084	31654	31505	34311	29519	29113	31196	93.3	113.7
OCTOBER	18333	32009	32002	31958	32726	34426	31018	30072	32568	92.3	117.4
NOVEMBER	17627	30724	31478	31648	31981	33569	30034	29729	31874	93.3	116.1
DECEMBER	19319	25989	29880	30671	30937	33704	29969	28544	30401	93.9	111.4
DAILY AVERAGE FOR YEAR	16005	25816	26945	27471	27733	29487	26014	25612	27490	93.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	62.5	100.8	105.2	107.3	108.3	115.1	101.6				

Station: 35-340 **Route:** 0080 (A00080)
Location: SR 80, 1100 West
Accum. Mileage: 118.08

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	27158	52599	56483	56745	58196	60279	34324	49012	56650	86.5	91.4
FEBRUARY	31501	56435	56340	57315	60814	64261	38476	52163	59033	88.4	97.3
MARCH	33224	60441	59752	61937	62456	64316	39881	55379	61927	89.4	103.3
APRIL	30828	59435	59915	60113	61835	61048	37408	51685	60469	85.5	96.4
MAY	29635	54214	59957	61685	60931	61705	36246	52689	59558	88.5	98.3
JUNE	33665	61739	62629	63429	64596	64620	40578	56475	63512	88.9	105.3
JULY	33118	56387	55347	64243	64829	65722	40386	53226	61071	87.2	99.3
AUGUST	33434	64351	65288	66125	66811	66160	40496	58351	65789	88.7	108.8
SEPTEMBER	34687	54896	63183	66666	65363	66520	39975	55722	63478	87.8	103.9
OCTOBER	31757	59963	61430	62622	63342	64181	38444	54197	62161	87.2	101.1
NOVEMBER	30469	60983	62294	62730	54783	56473	36629	52498	59389	88.4	97.9
DECEMBER	29389	51002	59706	62534	62909	64664	39307	51981	60377	86.1	96.9
DAILY AVERAGE FOR YEAR	31466	57557	60240	62251	62233	63460	38571	53622	61148	87.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	58.7	107.3	112.3	116.1	116.1	118.3	71.9				

Station: 35-341 **Route:** 0080 (A00080)
Location: SR 80, East of 300 East Overpass
Accum. Mileage: 121.11

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	53535	93633	102465	105203	104766	110848	86664	92842	102898	90.2	91.4
FEBRUARY	60213	103624	100131	107382	109935	115439	88083	97829	107302	91.2	96.4
MARCH	61318	107470	107595	109407	109573	115646	89125	101134	110147	91.8	99.6
APRIL	59712	103857	108296	108830	111172	112051	87647	97121	108841	89.2	95.7
MAY	64005	101021	108440	110988	110877	113762	87905	100272	108730	92.2	98.8
JUNE	68225	109949	113722	113880	115558	117647	93044	105377	114374	92.1	103.8
JULY	66432	112053	113313	115439	116081	118218	91412	103280	114879	89.9	101.7
AUGUST	70748	112160	114936	116698	117523	121290	95103	107838	116504	92.6	106.2
SEPTEMBER	65683	109022	112329	113857	115639	121445	95630	105050	114791	91.5	103.5
OCTOBER	63233	108786	111523	114147	115257	119829	90039	102413	113567	90.2	100.9
NOVEMBER	56699	108743	110318	111766	112543	114646	86301	100946	111653	90.4	99.4
DECEMBER	62330	109485	112509	114765	117760	122627	95641	103905	115772	89.7	102.3
DAILY AVERAGE FOR YEAR	62524	106437	109609	111891	113114	117138	90706	101524	111638	90.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	61.6	104.8	108.0	110.2	111.4	115.4	89.3				

Station: 35-344 **Route:** 0015(A00015)
Location: I-15, South of 1700 South Overpass
Accum. Mileage: 305.42

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	97630	166072	172078	180806	181984	199461	155606	162914	179079	91.0	91.0
FEBRUARY	104486	180296	170491	192848	194874	208879	156244	172588	189478	91.1	96.4
MARCH	109012	190609	191710	198735	198035	213682	161511	182698	199197	91.7	102.0
APRIL	108471	186666	190888	192939	201024	204841	160585	175024	195272	89.6	97.8
MAY	105953	184547	188506	192017	196400	205920	158739	177206	192810	91.9	99.0
JUNE	117061	190463	198414	200642	203513	210838	164059	185144	201356	91.9	103.4
JULY	114845	199590	201313	194323	202251	211213	158553	180688	201636	89.6	100.9
AUGUST	118083	198928	205117	209015	211260	219561	166494	191588	208735	91.8	107.0
SEPTEMBER	111277	187915	194457	196958	204984	217488	166955	183486	201176	91.2	102.5
OCTOBER	109670	189843	195492	198030	201615	216261	160007	179957	199559	90.2	100.5
NOVEMBER	106614	185384	190524	192682	195622	210384	161724	178668	194849	91.7	99.8
DECEMBER	109493	170959	193484	201337	201780	216186	165027	178186	197675	90.1	99.5
DAILY AVERAGE FOR YEAR	109255	185868	190982	196034	199650	211482	161406	179048	196803	91.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	61.0	103.8	106.7	109.5	111.5	118.1	90.1				

Station: 35-345 **Route:** 0269 (A00269)
Location: SR 269, 500 South on Ramp Westbound
Accum. Mileage: 1.60

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	22956	45196	52041	54182	53034	56484	40131	45687	51863	88.1	95.7
FEBRUARY	25296	49768	50929	55474	56156	58682	40343	48093	54202	88.7	100.7
MARCH	25159	53112	53635	55922	55805	60103	40869	50008	55919	89.4	104.7
APRIL	23777	50665	53993	53026	55716	56730	39011	46482	54026	86.0	97.4
MAY	24377	44716	52473	53598	54405	55892	36368	46390	51962	89.3	97.2
JUNE	23593	50326	51840	54901	56359	56634	35784	47691	54238	87.9	99.9
JULY	20554	47619	49443	49789	51012	51589	31437	42109	49782	84.6	88.2
AUGUST	25296	53854	55099	56180	57568	60096	39152	50252	56523	88.9	105.3
SEPTEMBER	24758	44974	54733	54866	56680	59027	38455	47715	54293	87.9	99.9
OCTOBER	24249	52206	54596	55140	57360	58447	38106	48112	55354	86.9	100.8
NOVEMBER	24876	55421	57069	58076	51049	57016	40173	49462	55620	88.9	103.6
DECEMBER	27170	47576	57075	59580	60802	63713	45130	50974	58033	87.8	106.8
DAILY AVERAGE FOR YEAR	24282	49451	53575	55129	55472	58022	38728	47744	54330	87.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	50.9	103.6	112.2	115.5	116.2	121.5	81.1				

Station: 35-346 **Route:** 0269 (A00269)
Location: SR 269, 600 South Off Ramp Eastbound
Accum. Mileage: 0.0

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	20663	43435	49283	52126	51084	55036	40490	43930	49844	88.1	96.7
FEBRUARY	23935	47734	48119	53389	53710	57643	40641	46453	52119	89.1	102.2
MARCH	23430	51255	51189	53557	53170	58886	41002	48244	53819	89.6	106.2
APRIL	21928	48881	51306	52107	53181	54284	39238	44829	51951	86.3	98.7
MAY	23229	43491	49869	51144	50395	53568	35634	44317	49494	89.5	97.5
JUNE	22428	47650	50646	51010	51993	53458	36023	45276	51113	88.6	99.7
JULY	21194	43340	42177	49740	50799	51668	32524	40736	47344	86.0	89.7
AUGUST	22367	51217	52962	53757	54393	57202	37789	47737	53880	88.6	105.1
SEPTEMBER	31947	50918	50865	50444	51083	56670	38046	47154	52219	90.3	103.8
OCTOBER	23342	48650	50093	50432	52203	54100	39798	45050	50939	88.4	99.2
NOVEMBER	21349	50903	51931	52089	45896	53321	38214	45093	50661	89.0	99.2
DECEMBER	24643	43558	52167	54006	54673	58561	41708	46522	52877	88.0	102.4
DAILY AVERAGE FOR YEAR	23275	47366	50089	52034	51842	55484	38384	45435	51363	88.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	51.2	104.3	110.2	114.5	114.1	122.1	84.5				

Station: 35-347 **Route:** 0015 (A00015)
Location: I-15, 5900 South Overpass
Accum. Mileage: 299.19

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	66563	119947	129669	132599	130641	140289	117099	118174	130100	90.8	90.9
FEBRUARY	74579	132455	126158	136411	138272	148081	120290	125178	136275	91.9	96.3
MARCH	77316	137385	139432	141426	142463	151257	123633	131832	142739	92.4	101.4
APRIL	79460	136821	139963	140268	145990	148497	124364	128842	142308	90.5	99.1
MAY	81066	127396	136101	139340	141788	146371	122364	128405	137688	93.3	98.8
JUNE	85441	139696	143679	146473	147640	151297	125206	135222	146094	92.6	104.0
JULY	82252	135209	133424	149364	150747	154088	123237	130774	144121	90.7	100.6
AUGUST	85034	146209	147643	149568	151971	159407	129249	139532	150799	92.5	107.3
SEPTEMBER	81156	137763	138717	139485	144897	152830	124987	131905	143219	92.1	101.5
OCTOBER	79208	136360	138782	139693	144641	151488	122869	129242	141772	91.2	99.4
NOVEMBER	78440	139291	141469	144646	131262	145205	124330	129816	140155	92.6	99.9
DECEMBER	80672	125476	140041	145379	144851	157864	126401	130570	143443	91.0	100.5
DAILY AVERAGE FOR YEAR	79111	134134	137933	142184	142961	150768	123752	129981	141596	91.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	60.9	103.2	106.1	109.4	110.0	116.0	95.2				

Station: 57-348 **Route:** 0015 (A00015)
Location: I-15, South of 31st Street Interchange
Accum. Mileage: 340.54

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	37751	59747	64550	65302	61323	67509	55774	58383	63546	91.9	82.7
FEBRUARY	43475	65642	62674	67670	69500	77123	62760	64121	68522	93.6	90.9
MARCH	45142	67999	69192	71197	72512	79479	63963	67778	72378	93.6	96.0
APRIL	48104	70756	72215	73735	75629	81336	66264	68884	74734	92.2	97.6
MAY	50982	70727	73616	76093	76552	82787	67753	71435	75632	94.5	101.2
JUNE	55235	77456	78951	80946	82429	88762	73827	77387	82062	94.3	109.7
JULY	55775	75741	73770	81581	83948	90266	74899	75817	80808	93.8	107.4
AUGUST	57826	78943	80614	81815	84194	91284	77661	79225	83218	95.2	112.3
SEPTEMBER	51057	71130	76141	76685	78734	87084	71265	73558	78389	93.8	104.2
OCTOBER	51417	71637	73790	75703	77774	84302	67893	71191	76284	93.3	100.9
NOVEMBER	47624	70816	73982	77046	70389	78767	66625	69614	74156	93.9	98.6
DECEMBER	45130	69819	71948	73551	75794	82415	67800	69070	75072	92.0	97.9
DAILY AVERAGE FOR YEAR	48986	70760	72660	75220	75858	82735	68195	70571	75447	93.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	69.4	100.3	103.0	106.6	107.5	117.2	96.6				

Station: 49-349 **Route:** 0015 (A00015)
Location: I-15, North of Santaquin Ramp Westbound
Accum. Mileage: 244.92

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	12281	14883	13350	13664	13419	16759	14860	14109	14388	98.1	77.6
FEBRUARY	14765	13799	13523	14373	15276	19447	16905	15441	15283	101.0	85.0
MARCH	16903	15715	15589	16468	17440	20577	17984	17328	17288	100.2	95.4
APRIL	18857	17239	15907	17397	19081	22471	19472	18667	18419	101.3	102.7
MAY	17661	15722	15490	16352	17212	20998	19207	17359	16985	102.2	95.5
JUNE	20205	18124	17728	18878	19983	24262	21735	20263	20006	101.3	111.5
JULY	20447	19221	19039	19922	20368	24834	24028	21133	20607	102.6	116.3
AUGUST	20962	18722	17993	18683	20147	24339	22875	20378	19842	102.7	112.1
SEPTEMBER	18368	19078	16559	17001	17946	23206	20495	19144	18970	100.9	105.3
OCTOBER	19639	16855	16107	17489	18795	23015	19682	18675	18273	102.2	102.8
NOVEMBER	19297	15478	15884	18774	17158	20346	19911	18111	17568	103.1	99.7
DECEMBER	14105	14416	16985	17372	17987	20656	19091	17300	17634	98.1	95.2
DAILY AVERAGE FOR YEAR	17722	16609	16145	17226	17961	21776	19771	18172	17944	101.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	97.5	91.4	88.8	94.8	98.8	119.8	108.8				

Station: 49-350 **Route:** 0189 (A00189)
Location: SR 189, University Ave. North of Univ. Int.
Accum. Mileage: 0.0

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	11681	28015	29655	29651	29511	31349	19586	25392	29563	85.9	88.5
FEBRUARY	12799	28573	29584	29404	29886	33524	25193	26995	30194	89.4	94.1
MARCH	14753	30243	30833	30917	31470	33810	25760	28624	31534	90.8	99.7
APRIL	14878	30744	31114	31752	32992	35008	25631	28300	32322	87.6	98.6
MAY	15469	29599	30548	30901	33224	34742	25955	28800	31613	91.1	100.4
JUNE	16033	32469	32413	33023	33542	35811	26336	30262	33563	90.2	105.4
JULY	17229	32715	32219	35040	36056	38554	28583	30971	34812	89.0	107.9
AUGUST	16752	31875	32091	33152	33923	35839	27385	30427	33334	91.3	106.0
SEPTEMBER	15725	29186	32401	32855	32779	36505	26409	29545	32924	89.7	103.0
OCTOBER	15361	31566	32078	32244	32952	35384	26083	29086	32752	88.8	101.4
NOVEMBER	14877	31769	31834	32935	28504	32723	26178	28557	31477	90.7	99.5
DECEMBER	13081	24609	30752	29812	32607	36064	25975	27313	31021	88.0	95.2
DAILY AVERAGE FOR YEAR	14845	30141	31278	31820	32254	34989	25825	28698	32097	89.4	
% DAILY AVE. OF YEAR DAILY AVERAGE	51.7	105.0	109.0	110.9	112.4	121.9	90.0				

Station: 33-362 **Route:** 0089 (A00089)
Location: SR 89, West of Garden CIty
Accum. Mileage: 410.20

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	685	684	524	520	552	728	897	653	602	108.5	43.8
FEBRUARY	870	703	454	538	619	840	1032	722	631	114.4	48.5
MARCH	796	623	642	623	636	838	874	717	676	106.1	48.1
APRIL	986	680	631	660	695	921	1024	813	717	113.4	54.6
MAY	1576	1384	876	859	914	1277	1664	1204	1059	113.7	80.8
JUNE	2388	1676	1510	1629	1744	2243	2453	1952	1782	109.5	131.0
JULY	4553	2682	2723	2913	3124	4303	5297	3707	3127	118.5	248.8
AUGUST	4080	2513	2205	2182	2905	4042	5009	3194	2725	117.2	214.4
SEPTEMBER	2683	2760	1448	1447	1398	2241	2830	2143	1877	114.2	143.8
OCTOBER	1710	1049	846	919	1045	1412	1841	1255	1045	120.1	84.2
NOVEMBER	641	580	715	903	619	773	750	715	722	99.0	48.0
DECEMBER	600	616	682	684	761	857	841	724	726	99.7	48.6
DAILY AVERAGE FOR YEAR	1789	1338	1105	1155	1268	1694	2078	1490	1312	113.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	120.1	89.8	74.2	77.5	85.1	113.7	139.5				

Station: 05-363 **Route:** 0091 (A00091)
Location: SR 91, nORTH OF wELLSVILLE
Accum. Mileage: 19.55

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	8430	11595	10943	9483	11062	12918	13285	11027	11206	98.4	83.1
FEBRUARY	10224	12365	10566	9889	12647	15544	14618	12265	12202	100.5	92.4
MARCH	10302	12006	9859	12203	13204	15343	14445	12587	12661	99.4	94.8
APRIL	11471	12556	10921	11192	13674	15577	15140	12958	12784	101.4	97.6
MAY	12561	13847	11283	12936	13783	15662	16265	13658	13396	102.0	102.9
JUNE	12248	13756	13008	12312	14963	17688	17399	14605	14525	100.6	110.1
JULY	13057	14832	11495	11388	14872	18851	17357	14602	14314	102.0	110.0
AUGUST	13540	14650	10925	11317	14787	17422	19091	14321	13628	105.1	107.9
SEPTEMBER	12887	13978	10223	10401	14105	16914	20331	14420	13305	108.4	108.7
OCTOBER	12696	12461	9698	11305	13690	17074	16676	13202	12685	104.1	99.5
NOVEMBER	11290	12406	9972	10361	13710	16536	13826	12549	12546	100.0	94.6
DECEMBER	9635	12137	12457	11100	13935	15696	15578	13002	13190	98.6	98.0
DAILY AVERAGE FOR YEAR	11484	13059	10928	11199	13738	16280	16239	13271	13041	101.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	86.5	98.4	82.3	84.4	103.5	122.7	122.4				

Station: 21-382 **Route:** 0014 (A00014)
Location: SR 14, East of Cedar City Interchange
Accum. Mileage: 1.60

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	704	729	604	528	504	856	1082	712	646	110.2	37.1
FEBRUARY	994	864	660	652	758	1028	1218	882	792	111.4	46.0
MARCH	802	728	749	776	840	960	1096	851	817	104.2	44.4
APRIL	994	915	904	949	1100	1144	1332	1056	1002	105.4	55.1
MAY	2084	2028	1452	1468	1519	1938	2469	1831	1677	109.2	95.5
JUNE	2715	2212	2116	2130	2158	2851	2859	2439	2312	105.5	127.2
JULY	4311	3575	3499	3213	3297	4150	4924	3893	3548	109.7	203.1
AUGUST	4181	2926	2958	3209	3206	4237	5114	3636	3284	110.7	189.7
SEPTEMBER	3573	3089	2323	2287	2451	3254	4276	3085	2708	113.9	160.9
OCTOBER	3151	2090	1911	2113	2297	2866	3535	2548	2232	114.2	132.9
NOVEMBER	1069	923	1002	1174	1182	1159	1159	1101	1096	100.5	57.4
DECEMBER	668	763	787	874	881	1039	1049	871	877	99.3	45.4
DAILY AVERAGE FOR YEAR	2091	1765	1592	1618	1695	2116	2539	1917	1757	109.1	
% DAILY AVE. OF YEAR DAILY AVERAGE	109.1	92.1	83.0	84.4	88.4	110.4	132.4				

Station: 53-400 **Route:** 0015 (A00015)
Location: I-15, South of Bloomington Interchange
Accum. Mileage: 1.80

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	11981	11741	10062	10040	10454	12459	12210	11276	10947	103.0	80.5
FEBRUARY	13669	10890	10944	10163	10726	12527	13206	11732	11050	106.2	83.8
MARCH	13536	10687	10701	10932	11899	14257	14407	12347	11782	104.8	88.2
APRIL	14478	10818	10773	11238	12079	14367	14493	12732	11855	107.4	90.9
MAY	15646	12785	12422	12418	13092	15517	15691	13804	13155	104.9	98.6
JUNE	16595	13290	13224	14165	15639	18212	16785	15516	15090	102.8	110.8
JULY	19229	15574	15311	15474	16091	18657	19992	17294	16190	106.8	123.5
AUGUST	19647	15297	15220	15715	16812	19527	19782	17282	16436	105.1	123.4
SEPTEMBER	16589	15231	13173	13368	14322	17548	16873	15428	14863	103.8	110.2
OCTOBER	16399	10363	12158	12473	14011	15887	16010	13810	12822	107.7	98.6
NOVEMBER	14541	10992	11964	12136	13053	15840	14354	13224	12779	103.5	94.5
DECEMBER	12194	10246	12909	13193	14021	15281	15068	13361	13232	101.0	95.4
DAILY AVERAGE FOR YEAR	15326	12348	12410	12624	13581	15877	15806	14000	13368	104.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	109.5	88.2	88.6	90.2	97.0	113.4	112.9				

Station: 53-401 **Route:** 0015 (A00015)
Location: I-15, South of Leeds
Accum. Mileage: 22.39

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	9966	9872	8376	8602	9158	11205	10717	9671	9414	102.7	81.1
FEBRUARY	10532	9947	8330	8990	10068	12691	11227	10255	10005	102.5	86.0
MARCH	12235	9190	9722	10219	11531	13430	12141	11260	10937	103.0	94.4
APRIL	12811	10201	9831	10736	12368	13888	12452	11814	11405	103.6	99.0
MAY	11469	11507	10043	10411	11709	13976	12045	11504	11415	100.8	96.4
JUNE	13851	11446	11382	12038	13068	15645	13757	13115	12865	101.9	109.9
JULY	15232	13409	13448	13876	15411	17499	16069	14983	14666	102.2	125.6
AUGUST	17093	12891	13321	13599	14648	16671	16529	14857	14178	104.8	124.5
SEPTEMBER	12882	12349	10774	11139	12079	14923	13216	12586	12380	101.7	105.5
OCTOBER	11127	9893	10047	10070	10897	12952	11014	10809	10699	101.0	90.6
NOVEMBER	13384	8696	9656	11647	10546	11751	11916	11086	10517	105.4	92.9
DECEMBER	9531	8276	10750	11040	11775	13286	12337	11069	11133	99.4	92.8
DAILY AVERAGE FOR YEAR	12436	10681	10471	11064	11977	14018	12841	11929	11642	102.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	104.3	89.5	87.8	92.7	100.4	117.5	107.6				

Station: 53-402 **Route:** 0009 (A00009)
Location: SR 9, West of Hurricane
Accum. Mileage: 1.11

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	4865	8071	8212	8311	8498	9354	8121	7835	8458	92.6	84.3
FEBRUARY	5450	8255	8154	8621	8555	9488	8553	8154	8615	94.6	87.8
MARCH	6820	8814	8952	9488	9596	10772	9766	9248	9580	96.5	99.6
APRIL	8249	9440	9827	9853	9894	11257	10184	9775	10054	97.2	105.2
MAY	7268	9658	9543	9706	9991	10817	10310	9615	9903	97.1	103.5
JUNE	7857	8845	8847	8377	9456	10174	10539	9200	9201	100.0	99.0
JULY	7480	9275	9909	10479	11122	11506	10185	9896	10402	95.1	106.5
AUGUST	7837	10364	10464	10445	10401	11467	10474	10230	10603	96.5	110.1
SEPTEMBER	8414	10942	11204	11449	11747	13029	11229	11210	11739	95.5	120.7
OCTOBER	6608	8227	8405	8863	9193	10079	9644	8623	8895	96.9	92.8
NOVEMBER	5927	8734	8900	9256	8977	10294	9516	8822	9222	95.7	95.0
DECEMBER	5713	9240	9202	9422	9288	10163	8999	8806	9496	92.7	94.8
DAILY AVERAGE FOR YEAR	6847	9129	9290	9538	9717	10726	9821	9289	9680	96.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	73.7	98.3	100.0	102.7	104.6	115.5	105.7				

Station: 01-403 **Route:** 0015 (A00015)
Location: I-15, North of North Beaver Interchange
Accum. Mileage: 111.98

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	8391	8496	6708	6700	6857	8571	7384	7614	7479	101.8	72.1
FEBRUARY	9697	8244	6513	7173	8108	10697	8862	8471	8147	104.0	80.2
MARCH	11801	7690	7946	8543	9846	11655	10043	9682	9250	104.7	91.7
APRIL	12939	9356	8005	8960	9810	11879	10777	10354	9602	107.8	98.0
MAY	11583	10731	8551	9275	10475	12986	10801	10521	10288	102.3	99.6
JUNE	14759	10712	10484	11283	12461	15101	13329	12669	12169	104.1	119.9
JULY	14879	11675	11752	11926	12576	14753	15272	13328	12495	106.7	126.2
AUGUST	16166	11915	10827	11991	13271	15493	14602	13327	12612	105.7	126.2
SEPTEMBER	11933	8914	9257	9939	10215	13563	11568	10889	10529	103.4	103.1
OCTOBER	12763	8533	8164	9529	10834	12857	10268	10363	9835	105.4	98.1
NOVEMBER	14224	8192	7295	10670	9234	10496	10462	10073	9248	108.9	95.4
DECEMBER	8654	6449	8921	9274	9847	11304	10227	9319	9261	100.6	88.2
DAILY AVERAGE FOR YEAR	12241	9290	8691	9645	10364	12482	11197	10563	10094	104.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	115.9	87.9	82.3	91.3	98.1	118.2	106.0				

Station: 15-404 **Route:** 0070 (A00070)
Location: SR 70, West of SR 6 Interchange
Accum. Mileage: 149.52

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1856	1742	1672	1673	1632	1781	1814	1740	1701	102.3	50.1
FEBRUARY	1992	1746	1499	1551	1724	1941	2085	1791	1692	105.9	51.6
MARCH	2836	2021	2147	2349	2536	2926	3258	2584	2423	106.6	74.5
APRIL	3656	2274	2465	2795	3237	3645	3760	3158	2883	109.5	91.0
MAY	4495	4144	3400	3557	4287	4817	4555	4133	3997	103.4	119.1
JUNE	5529	4445	4423	4716	4994	5753	5680	5097	4912	103.8	146.9
JULY	5902	4823	4729	5011	5165	5570	6601	5436	5048	107.7	156.7
AUGUST	5875	4569	4505	4867	5211	5568	6002	5193	4933	105.3	149.7
SEPTEMBER	4803	4274	3731	3989	4272	4840	4874	4428	4251	104.2	127.6
OCTOBER	3978	2898	3062	3563	3961	3869	3814	3565	3426	104.1	102.7
NOVEMBER	2692	1744	1925	2292	2162	2277	2564	2236	2093	106.8	64.4
DECEMBER	2367	1662	1732	2004	2161	2451	2471	2151	2023	106.3	62.0
DAILY AVERAGE FOR YEAR	3805	3057	2958	3203	3467	3802	3993	3470	3297	105.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	109.7	88.1	85.2	92.3	99.9	109.6	115.1				

Station: 01-405 **Route:** 0021 (A00021)
Location: SR 21, West of Beaver
Accum. Mileage: 96.12

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	740	857	903	932	895	979	925	884	910	97.1	80.8
FEBRUARY	772	970	928	990	985	1013	951	944	977	96.6	86.3
MARCH	863	990	1000	954	1009	1016	915	966	993	97.3	88.3
APRIL	798	1037	1104	1113	1120	1141	1083	1049	1103	95.1	95.9
MAY	1159	1220	1173	1162	1155	1282	1165	1188	1197	99.2	108.6
JUNE	1046	1195	1209	1220	1237	1227	1215	1195	1219	98.0	109.2
JULY	1102	1347	1331	1243	1231	1316	1401	1282	1296	98.9	117.2
AUGUST	990	1182	1275	1280	1324	1327	1340	1250	1280	97.7	114.3
SEPTEMBER	1021	1126	1167	1169	1263	1293	1227	1186	1208	98.2	108.4
OCTOBER	922	1107	1154	1209	1197	1264	1074	1125	1181	95.3	102.8
NOVEMBER	782	1044	1125	1127	1046	1084	1061	1042	1085	96.0	95.2
DECEMBER	753	1006	1060	1062	1091	1143	988	1010	1076	93.9	92.3
DAILY AVERAGE FOR YEAR	908	1093	1120	1122	1131	1173	1117	1094	1128	97.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	83.0	99.9	102.4	102.6	103.4	107.2	102.1				

Station: 35-406 **Route:** 0071 (A00071)
Location: SR 71, 700 East South of 4500 South
Accum. Mileage: 13.26

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	15865	30783	34754	34845	35183	36355	24642	30036	34237	87.7	93.4
FEBRUARY	17055	33582	34849	36690	35566	37243	25558	31506	35586	88.5	98.0
MARCH	17283	35522	35922	36313	36181	38198	25482	32590	36489	89.3	101.4
APRIL	17362	36112	36232	36487	36318	37188	25757	31498	36467	86.4	98.0
MAY	18048	32964	36404	36856	36191	37338	25172	32197	35880	89.7	100.1
JUNE	18446	36415	37253	36718	37367	38082	25538	33157	37218	89.1	103.1
JULY	17160	32275	32364	36990	36599	37134	23960	30301	34939	86.7	94.3
AUGUST	17917	37162	37506	37532	37439	38344	26045	33557	37583	89.3	104.4
SEPTEMBER	17883	32643	37412	38652	37104	39425	27185	32927	37160	88.6	102.4
OCTOBER	18266	36304	37393	37324	37270	39015	27363	33023	37406	88.3	102.7
NOVEMBER	17084	36912	37294	36957	36374	39718	25342	33069	37380	88.5	102.9
DECEMBER	18587	31854	35615	36565	37394	39171	27069	31930	36265	88.0	99.3
DAILY AVERAGE FOR YEAR	17567	34278	36116	36834	36602	38148	25777	32149	36396	88.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	54.6	106.6	112.3	114.6	113.9	118.7	80.2				

Station: 35-407 **Route:** 0068 (A00068)
Location: SR 68, Redwood Road South of Bluffdale
Accum. Mileage: 36.17

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	3340	2759	2714	2964	2963	3147	3792	3082	2894	106.5	77.8
FEBRUARY	4290	3252	2993	3006	3114	3428	4146	3461	3159	109.6	87.4
MARCH	4327	3389	3443	3597	3399	3773	4217	3721	3529	105.4	94.0
APRIL	4820	3534	3608	3927	3787	4183	4866	4153	3807	109.1	104.9
MAY	5088	4112	3538	3772	3677	4110	5019	4151	3837	108.2	104.8
JUNE	5173	4073	4003	4195	4287	4531	5246	4495	4235	106.1	113.5
JULY	4499	3959	3956	4163	4020	4405	4474	4220	4094	103.1	106.6
AUGUST	4691	4257	4311	4310	4301	4927	4742	4486	4406	101.8	113.3
SEPTEMBER	4756	4150	4184	4258	4253	4818	5258	4559	4356	104.7	115.1
OCTOBER	4416	3439	3717	3886	3902	4233	4903	4050	3812	106.2	102.3
NOVEMBER	3667	3433	3502	3760	3535	3577	4324	3683	3569	103.2	93.0
DECEMBER	3498	2979	3467	3508	3416	3510	3655	3445	3382	101.9	87.0
DAILY AVERAGE FOR YEAR	4355	3608	3616	3785	3733	4062	4554	3960	3761	105.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	110.0	91.1	91.3	95.6	94.3	102.6	115.0				

Station: 35-408 **Route:** 0068 (A00068)
Location: SR 68, Redwood Road South North of 1700 South
Accum. Mileage: 56.54

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	10322	21963	24710	24708	25082	26975	15585	21109	24565	85.9	94.2
FEBRUARY	11988	26242	25815	26602	26648	28470	17321	23298	26755	87.1	104.0
MARCH	13993	26684	26889	27011	27208	29921	19972	24866	27608	90.1	111.0
APRIL	13771	25655	25969	26412	26836	27905	19164	23193	26555	87.3	103.5
MAY	11673	24408	24447	24631	25955	26727	16856	22331	25137	88.8	99.7
JUNE	11578	25962	26014	25875	26440	27644	17529	23275	26447	88.0	103.9
JULY	12085	25862	25924	26048	26512	27066	17655	22587	26262	86.0	100.8
AUGUST	12888	27648	26682	26927	27529	28570	17354	24243	27416	88.4	108.2
SEPTEMBER	12942	21535	23803	24912	24371	26901	18119	21845	24428	89.4	97.5
OCTOBER	12082	23032	23124	23421	23548	25338	16980	20914	23637	88.5	93.4
NOVEMBER	11152	23248	22667	23419	20418	23019	16243	20150	22496	89.6	90.0
DECEMBER	11603	23614	23649	23836	24070	25382	17165	21014	24171	86.9	93.8
DAILY AVERAGE FOR YEAR	12154	24590	24956	25331	25386	27029	17536	22398	25458	88.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	54.3	109.8	111.4	113.1	113.3	120.7	78.3				

Station: 35-409 **Route:** 0186 (A00186)
Location: SR 186, North Temple at Jordan River Bridge
Accum. Mileage: 2.23

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	13623	22921	25582	26643	26401	28957	19301	23092	25933	89.0	92.1
FEBRUARY	16027	24970	25693	27819	27591	29870	20850	24688	27189	90.8	98.4
MARCH	16144	27164	26928	27515	27582	30430	20814	25543	28000	91.2	101.8
APRIL	15420	26751	26963	26902	28000	29144	20852	24413	27552	88.6	97.3
MAY	16052	24518	27052	27796	28111	30150	21884	25214	27386	92.1	100.5
JUNE	16223	27111	27980	28186	28934	30053	20928	25888	28547	90.7	103.2
JULY	15662	27450	23750	28035	28111	29099	19454	24155	27297	88.5	96.3
AUGUST	16753	28359	28199	28382	29133	30551	21162	26318	28878	91.1	104.9
SEPTEMBER	20221	26457	28922	30502	31184	32516	24289	27772	30040	92.5	110.7
OCTOBER	15491	26593	27116	27327	27850	29760	19896	24688	27649	89.3	98.4
NOVEMBER	15250	27746	27898	28315	24613	27899	20481	24724	27218	90.8	98.6
DECEMBER	15190	23541	26829	27536	28231	30525	21787	24582	27484	89.4	98.0
DAILY AVERAGE FOR YEAR	15917	26073	26915	27920	27947	29987	21023	25086	27768	90.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	63.4	103.9	107.3	111.3	111.4	119.5	83.8				

Station: 35-411 **Route:** 0089 (A00089)
Location: SR-89, East of Kanab
Accum. Mileage: 8.87

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	923	957	840	792	772	898	854	866	856	101.2	48.8
FEBRUARY	1121	1079	928	838	978	1162	1126	1033	997	103.6	58.3
MARCH	1458	1264	1208	1291	1378	1493	1427	1362	1335	102.0	76.8
APRIL	2000	1755	1683	1852	2198	2256	1986	1964	1949	100.8	110.8
MAY	2132	1983	1738	1701	1969	2278	2100	1969	1917	102.7	111.1
JUNE	2492	2143	2035	2140	2304	2676	2513	2340	2281	102.6	132.0
JULY	2762	2427	2345	2447	2548	2810	3056	2640	2511	105.1	148.9
AUGUST	2819	2293	2190	2281	2447	2792	3028	2526	2388	105.8	142.5
SEPTEMBER	2308	2176	1967	1966	2089	2442	2385	2205	2143	102.9	124.4
OCTOBER	2027	1608	1523	1714	1839	1969	1852	1784	1716	104.0	100.6
NOVEMBER	1709	1176	1222	1456	1318	1439	1487	1400	1328	105.4	79.0
DECEMBER	983	846	1119	1134	1232	1357	1280	1143	1148	99.6	64.5
DAILY AVERAGE FOR YEAR	1880	1650	1567	1638	1764	1966	1944	1773	1717	103.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	106.0	93.1	88.4	92.4	99.5	110.9	109.6				

Station: 25-412 **Route:** 0011 (A00011)
Location: SR-11, South of Kanab
Accum. Mileage: 0.00

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1958	2862	2979	2961	3003	3406	2858	2836	3031	93.6	75.8
FEBRUARY	2294	3157	2889	2980	3070	3566	3335	3042	3132	97.1	81.3
MARCH	2138	2979	2971	3121	3262	3435	3077	3024	3169	95.4	80.8
APRIL	2757	3432	3446	3410	3590	4120	3477	3439	3600	95.5	91.9
MAY	3143	3780	3470	3693	3999	4175	3903	3729	3800	98.1	99.7
JUNE	3707	4461	4471	4675	4785	5106	4589	4569	4722	96.8	122.1
JULY	4109	4963	4802	4953	5059	5443	4973	4879	5040	96.8	130.4
AUGUST	3997	4570	4539	4653	4836	5352	5057	4711	4775	98.7	125.9
SEPTEMBER	3662	4306	4276	4220	4450	4893	4599	4370	4451	98.2	116.8
OCTOBER	3215	3931	3839	3806	4034	4453	4033	3878	4001	96.9	103.7
NOVEMBER	2650	3205	3338	3467	3284	3716	3337	3291	3399	96.8	88.0
DECEMBER	2348	2858	3162	3155	3249	3552	3229	3075	3212	95.7	82.2
DAILY AVERAGE FOR YEAR	2987	3722	3684	3756	3897	4266	3887	3741	3865	96.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	79.8	99.5	98.5	100.4	104.2	114.0	103.9				

Station: 55-414 **Route:** 0095 (A00095)
Location: SR-95, South of Hanksville
Accum Mileage: 0.00

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	115	117	106	101	98	111	112	109	107	101.9	17.5
FEBRUARY	212	173	140	141	152	194	216	175	160	109.4	28.1
MARCH	370	291	279	275	317	382	364	326	311	104.8	52.4
APRIL	738	458	355	426	586	739	601	565	513	110.1	90.8
MAY	1163	1122	605	630	926	1280	1132	961	896	107.3	154.5
JUNE	1317	996	725	903	1085	1397	1390	1125	1041	108.1	180.9
JULY	1174	935	823	976	966	1182	1436	1081	974	111.0	173.8
AUGUST	1303	781	757	773	922	1162	1373	991	871	113.8	159.3
SEPTEMBER	1277	1199	728	777	936	1223	1238	1066	984	108.3	171.4
OCTOBER	1041	542	424	603	748	727	811	696	597	116.6	111.9
NOVEMBER	330	169	154	216	192	260	255	224	199	112.6	36.0
DECEMBER	114	101	104	128	122	134	132	120	118	101.7	19.3
DAILY AVERAGE FOR YEAR	751	582	436	494	591	737	762	622	568	109.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	120.7	93.6	70.1	79.4	95.0	118.5	122.5				

Station: 31-415 **Route:** 0089 (A00089)
Location: SR-89, North of Marysvale
Accum. Mileage: 181.36

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	772	871	881	898	855	977	965	884	895	98.8	62.3
FEBRUARY	1034	1063	937	931	999	1142	1188	1042	1014	102.8	73.4
MARCH	1227	1072	1132	1139	1240	1389	1381	1229	1202	102.2	86.5
APRIL	1389	1266	1108	1212	1355	1590	1387	1333	1306	102.1	93.9
MAY	1628	1635	1405	1442	1516	1767	1755	1583	1545	102.5	111.5
JUNE	1859	1738	1701	1770	1810	2002	1889	1830	1813	100.9	128.9
JULY	1985	1905	1853	1880	1893	2166	2217	1990	1938	102.7	140.1
AUGUST	1873	1686	1674	1734	1778	2009	1999	1813	1770	102.4	127.7
SEPTEMBER	1570	1633	1552	1501	1569	1839	1757	1643	1629	100.9	115.7
OCTOBER	1481	1367	1365	1434	1501	1672	1470	1464	1459	100.3	103.1
NOVEMBER	1182	1092	1120	1210	1101	1226	1223	1164	1150	101.2	82.0
DECEMBER	810	887	1033	1140	1067	1204	1081	1032	1073	96.2	72.7
DAILY AVERAGE FOR YEAR	1390	1358	1315	1359	1397	1584	1533	1420	1403	101.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	97.9	95.6	92.6	95.7	98.4	111.5	108.0				

Station: 49-416 **Route:** 0089 (A00089)
Location: SR-89,North of Birdseye
Accum. Mileage: 265.38

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1177	1351	1149	1129	1077	1543	1862	1317	1250	105.4	66.6
FEBRUARY	1152	1349	1199	1206	1211	1873	1684	1382	1368	101.0	69.9
MARCH	1454	1382	1339	1359	1342	1814	2152	1544	1455	106.1	78.1
APRIL	1887	1411	1432	1470	1574	2032	2372	1765	1584	111.4	89.2
MAY	2341	2029	1522	1583	1636	2284	3089	2034	1798	113.1	102.8
JUNE	2373	1830	1811	2020	1982	2781	3432	2323	2112	110.0	117.4
JULY	3007	2810	2416	2278	2553	3400	3863	2935	2697	108.8	148.4
AUGUST	2957	1895	1825	1880	1932	3152	3889	2444	2103	116.2	123.6
SEPTEMBER	2441	2442	1730	1694	1823	2636	3134	2312	2092	110.5	116.9
OCTOBER	2534	1846	1791	1833	1982	2823	3236	2269	2034	111.6	114.7
NOVEMBER	1539	1377	1476	1487	1546	2035	2239	1661	1578	105.3	84.0
DECEMBER	1430	1480	1526	1537	1728	1969	2111	1698	1663	102.1	85.8
DAILY AVERAGE FOR YEAR	2023	1785	1599	1619	1699	2357	2764	1978	1812	109.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	102.3	90.2	80.8	81.9	85.9	119.2	139.7				

Station: 15-418 **Route:** 0006 (A00006)
Location: SR-6, North of I-70 Interchange
Accum. Mileage: 266.7

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2175	1755	1794	1828	1892	2339	2063	1971	1908	103.3	58.1
FEBRUARY	2124	1879	1591	1831	1986	2539	2257	2029	1965	103.3	59.9
MARCH	3004	2057	2070	2401	2934	3787	3493	2842	2701	105.2	83.8
APRIL	4548	2912	2598	2850	3229	4548	3870	3555	3227	110.2	104.9
MAY	4183	4198	3026	3152	3797	4848	3840	3824	3759	101.7	112.8
JUNE	4843	3965	3346	3714	4311	4843	4508	4242	4085	103.8	125.1
JULY	5136	4388	4097	4319	4388	5300	5272	4722	4493	105.1	139.3
AUGUST	5175	4113	3746	3999	4346	5228	4664	4425	4253	104.0	130.5
SEPTEMBER	4773	4207	3296	3464	3807	5058	4334	4172	4018	103.8	123.1
OCTOBER	4616	3127	2847	3311	3916	4591	3776	3720	3506	106.1	109.7
NOVEMBER	3882	2427	2195	3079	2661	3052	3096	2910	2700	107.8	85.8
DECEMBER	2310	1885	1891	2060	2130	2529	2262	2173	2119	102.5	64.1
DAILY AVERAGE FOR YEAR	3884	3098	2719	3013	3305	4055	3644	3390	3238	104.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	114.6	91.4	80.2	88.9	97.5	119.6	107.5				

Station: 37-420 **Route:** 0191 (A00191)
Location: SR-191, North of Monticello
Accum. Mileage: 72.14

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2110	2205	2064	2147	2145	2382	2274	2184	2184	100.0	64.6
FEBRUARY	2433	2329	2200	2361	2422	2736	2540	2431	2410	100.9	71.9
MARCH	3121	2722	2738	2941	3025	3454	3374	3062	2997	102.2	90.5
APRIL	3376	3057	2996	3286	3494	3858	3510	3373	3338	101.0	99.7
MAY	3737	3738	3575	3671	3693	4298	3937	3793	3778	100.4	112.1
JUNE	4070	3867	3820	3926	4133	4543	4082	4081	4083	100.0	120.6
JULY	4210	4025	3915	4093	4219	4553	4531	4224	4154	101.7	124.9
AUGUST	4233	3975	3861	4030	4291	4328	4191	4123	4092	100.8	121.9
SEPTEMBER	3805	3884	3555	3764	3962	4441	3882	3916	3946	99.2	115.8
OCTOBER	3597	3324	3214	3617	3791	4037	3541	3568	3567	100.0	105.5
NOVEMBER	3313	2719	2716	3302	2877	3051	3035	3008	2947	102.1	88.9
DECEMBER	2247	2130	2714	3012	3089	3223	2938	2768	2852	97.1	81.8
DAILY AVERAGE FOR YEAR	3331	3177	3119	3357	3440	3755	3504	3383	3370	100.4	
% DAILY AVE. OF YEAR DAILY AVERAGE	98.5	93.9	92.2	99.2	101.7	111.0	103.6				

Station: 19-421 **Route:** 0191 (A00191)
Location: SR-191, North of SR 279 Potash Road
Accum. Mileage: 128.62

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2444	2411	2185	2250	2160	2494	2514	2351	2300	102.2	47.1
FEBRUARY	3463	2980	2395	2505	2606	3354	3498	2972	2768	107.4	59.6
MARCH	5357	3989	3995	3864	4120	5259	5672	4589	4267	107.5	92.0
APRIL	7007	4907	4607	4950	5847	7188	7146	6025	5500	109.5	120.8
MAY	7578	6254	5557	5540	6154	7387	7939	6548	6127	106.9	131.3
JUNE	7148	6346	6000	6081	6315	7214	7219	6627	6425	103.1	132.9
JULY	6637	6224	6029	6129	6235	6812	7008	6457	6283	102.8	129.5
AUGUST	6773	5859	5970	6020	6198	6833	6779	6320	6161	102.6	126.7
SEPTEMBER	6738	6218	5775	5920	6149	6763	6700	6351	6193	102.6	127.4
OCTOBER	6031	4482	4319	4766	5356	6217	6065	5283	4971	106.3	105.9
NOVEMBER	3888	2886	2867	3256	3430	3930	3919	3446	3280	105.1	69.1
DECEMBER	2303	2543	2652	2499	2492	3544	3092	2756	2784	99.0	55.3
DAILY AVERAGE FOR YEAR	5394	4611	4374	4496	4775	5592	5657	4987	4770	104.5	
% DAILY AVE. OF YEAR DAILY AVERAGE	108.2	92.5	87.7	90.2	95.7	112.1	113.4				

Station: 47-424 **Route:** 0191 (A00191)
Location: SR-191, North of Vernal
Accum. Mileage: 202.80

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	755	750	780	751	769	849	1024	806	778	103.6	50.8
FEBRUARY	884	838	728	814	847	899	1018	861	825	104.4	54.3
MARCH	1039	877	895	917	1005	1036	1049	975	951	102.5	61.5
APRIL	1288	1071	1142	1218	1196	1292	1315	1223	1184	103.3	77.1
MAY	2435	2136	1497	1574	1559	1887	2269	1891	1731	109.2	119.2
JUNE	2765	2157	2165	2230	2117	2388	2588	2338	2215	105.6	147.4
JULY	3305	2893	2811	2549	2660	3103	3519	3002	2807	106.9	189.3
AUGUST	2856	2131	2203	2242	2295	2742	3295	2509	2313	108.5	158.2
SEPTEMBER	2382	2213	1635	1738	1702	2138	2407	2047	1897	107.9	129.1
OCTOBER	1561	1266	1396	1434	1510	1574	1680	1481	1426	103.9	93.4
NOVEMBER	957	825	919	1050	920	1057	1111	977	957	102.1	61.6
DECEMBER	783	777	865	891	868	894	905	855	861	99.3	53.9
DAILY AVERAGE FOR YEAR	1731	1515	1423	1450	1464	1652	1863	1586	1501	105.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	109.1	95.5	89.7	91.4	92.3	104.2	117.5				

Station: 13-425 **Route:** 0040 (A00040)
Loation: SR-40, West of Roosevelt
Accum. Mileage: 111.39

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	3261	6184	6458	6340	6405	6836	5330	5779	6433	89.8	84.3
FEBRUARY	3660	6562	6535	6741	6757	7337	5625	6174	6786	91.0	90.1
MARCH	4027	6951	6881	6874	6967	7500	6031	6525	7045	92.6	95.2
APRIL	4236	7137	7039	7152	7198	7651	6021	6533	7235	90.3	95.3
MAY	4521	7369	7414	7271	7404	8446	6654	7044	7551	93.3	102.8
JUNE	5173	8021	7698	7811	8247	8522	6924	7545	8089	93.3	110.1
JULY	5364	7831	7774	7711	7952	8774	6919	7400	8000	92.5	108.0
AUGUST	5614	8120	7946	8250	8205	8983	7287	7807	8279	94.3	113.9
SEPTEMBER	4773	7335	7592	7606	7792	8616	6623	7220	7828	92.2	105.4
OCTOBER	4363	7103	7283	7472	7685	8152	6414	6859	7508	91.4	100.1
NOVEMBER	4513	7384	7702	7692	7291	7695	6369	6986	7547	92.6	101.9
DECEMBER	3770	6908	6901	6764	6967	7571	5842	6325	7048	89.7	92.3
DAILY AVERAGE FOR YEAR	4417	7233	7269	7324	7427	8010	6338	6853	7453	91.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	64.5	105.5	106.1	106.9	108.4	116.9	92.5				

Station: 15-427 **Route:** 0010 (A00010)
Loation: SR-10, North of Huntington
Accum. Mileage: 49.51

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1493	3111	3324	3289	3364	3742	2442	2935	3352	87.6	83.1
FEBRUARY	1804	3411	3341	3539	3641	3856	2663	3179	3557	89.4	90.1
MARCH	1865	3508	3536	3620	3704	3827	2625	3287	3649	90.1	93.1
APRIL	2083	3667	3651	3789	3924	4100	2940	3388	3826	88.6	96.0
MAY	2501	3927	4001	3922	4118	4450	3310	3767	4066	92.6	106.7
JUNE	2708	4115	4029	4017	4177	4538	3432	3893	4192	92.9	110.3
JULY	2718	3822	3830	4184	4256	4611	3679	3826	4125	92.8	108.4
AUGUST	2721	4079	3839	4075	4307	4442	3427	3864	4139	93.4	109.5
SEPTEMBER	2337	3929	3946	4040	4065	4548	3208	3735	4127	90.5	105.8
OCTOBER	1974	3819	3956	3893	4061	4324	2793	3517	3999	87.9	99.6
NOVEMBER	2158	4093	4201	4387	3654	3976	2929	3654	4058	90.0	103.5
DECEMBER	1748	3517	3664	3780	3845	3977	2855	3294	3767	87.4	93.3
DAILY AVERAGE FOR YEAR	2160	3744	3777	3887	3929	4201	3036	3530	3908	90.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	61.2	106.1	107.0	110.1	111.3	119.0	86.0				

Station: 03-430 **Route:** 0030 (A00030)
Loation: SR-30, Five Miles East of Curlew Junction
Accum. Mileage: 74.65

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	263	348	268	296	293	300	372	304	301	101.0	75.1
FEBRUARY	327	330	282	266	301	373	378	322	311	103.5	79.5
MARCH	349	300	321	318	321	354	333	328	324	101.2	81.0
APRIL	392	333	359	346	365	442	398	378	369	102.4	93.3
MAY	443	458	350	363	403	470	439	415	406	102.2	102.5
JUNE	476	394	388	393	405	482	474	431	415	103.9	106.4
JULY	510	433	400	421	437	493	504	459	437	105.0	113.3
AUGUST	532	443	399	401	436	509	512	457	434	105.3	112.8
SEPTEMBER	538	444	367	361	408	505	540	456	421	108.3	112.6
OCTOBER	711	419	397	384	478	777	717	550	484	113.6	135.8
NOVEMBER	437	357	354	401	367	447	468	403	385	104.7	99.5
DECEMBER	301	274	370	359	352	378	381	346	348	99.4	85.4
DAILY AVERAGE FOR YEAR	439	381	355	360	381	458	459	405	387	104.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	108.4	94.1	87.7	88.9	94.1	113.1	113.3				

Station: 03-430 **Route:** 0030 (A00030)
Location: SR 30, Five Miles East of Curlew Junction
Accum. Mileage: 74.65

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	263	348	268	296	293	300	372	304	301	101.0	75.1
FEBRUARY	327	330	282	266	301	373	378	322	311	103.5	79.5
MARCH	349	300	321	318	321	354	333	328	324	101.2	81.0
APRIL	392	333	359	346	365	442	398	378	369	102.4	93.3
MAY	443	458	350	363	403	470	439	415	406	102.2	102.5
JUNE	476	394	388	393	405	482	474	431	415	103.9	106.4
JULY	510	433	400	421	437	493	504	459	437	105.0	113.3
AUGUST	532	443	399	401	436	509	512	457	434	105.3	112.8
SEPTEMBER	538	444	367	361	408	505	540	456	421	108.3	112.6
OCTOBER	711	419	397	384	478	777	717	550	484	113.6	135.8
NOVEMBER	437	357	354	401	367	447	468	403	385	104.7	99.5
DECEMBER	301	274	370	359	352	378	381	346	348	99.4	85.4
DAILY AVERAGE FOR YEAR	439	381	355	360	381	458	459	405	387	104.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	108.4	94.1	87.7	88.9	94.1	113.1	113.3				

Station: 23-431 **Route:** 0028 (A00028)
Location: SR 28, South of Levan
Accum. Mileage: 16.0

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1154	1720	1741	1854	1523	1446	1310	1536	1663	92.4	67.8
FEBRUARY	1363	1594	1658	1672	1835	2123	1655	1700	1776	95.7	75.1
MARCH	1510	1736	1743	1782	1885	2224	1798	1826	1886	96.8	80.6
APRIL	1823	2112	2150	2223	2468	2667	1940	2177	2324	93.7	96.1
MAY	2206	2770	2450	2462	2551	3263	2541	2602	2681	97.1	114.9
JUNE	2276	2819	2727	2654	2826	3221	2440	2730	2865	95.3	120.5
JULY	2451	3037	2753	3027	3139	3600	3000	2984	3108	96.0	131.7
AUGUST	2500	2380	2634	2572	2700	2855	2631	2613	2629	99.4	115.4
SEPTEMBER	2130	2491	2200	2389	2508	3099	2535	2501	2564	97.5	110.4
OCTOBER	2424	2276	2290	2311	2455	3087	2335	2442	2466	99.0	107.8
NOVEMBER	1870	1931	1836	2061	2004	2438	2099	2034	2052	99.1	89.8
DECEMBER	1407	1815	1992	2116	2073	2397	2158	1993	2093	95.2	88.0
DAILY AVERAGE FOR YEAR	1919	2241	2189	2257	2332	2704	2219	2265	2345	96.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	84.7	98.9	96.6	99.6	103.0	119.4	98.0				

Station: 11-501 **Route:** 0215 (A00215)
Location: I-215, At 2500 North
Accum. Mileage: 25.67

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	18906	33656	36811	37566	37194	39046	26320	32496	36707	88.5	87.8
FEBRUARY	21012	37302	36370	38296	38743	41302	27125	34307	38402	89.3	92.7
MARCH	22411	39130	39267	39708	40138	41692	28278	36259	40056	90.5	97.9
APRIL	23331	39435	39654	39990	40995	41093	28121	35397	40233	88.0	95.6
MAY	23213	37694	39712	40876	41055	42736	28622	36578	40286	90.8	98.8
JUNE	26371	41899	42390	42736	43947	45172	30680	39397	43350	90.9	106.4
JULY	25120	38813	38536	43443	43941	45067	32041	37542	41810	89.8	101.4
AUGUST	29899	43752	43607	43625	44891	48904	40530	42353	44836	94.5	114.4
SEPTEMBER	25813	39023	42296	45179	43660	46906	35525	39868	43579	91.5	107.7
OCTOBER	24121	40743	41341	42067	42310	44581	30969	37765	42102	89.7	102.0
NOVEMBER	22288	41295	40780	42897	38530	39740	29000	36652	40654	90.2	99.0
DECEMBER	21464	35884	39247	41248	41513	43198	28992	35479	40360	87.9	95.8
DAILY AVERAGE FOR YEAR	23561	38950	40029	41493	41446	43360	30567	37021	41056	90.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	63.6	105.2	108.1	112.1	112.0	117.1	82.6				

Station: 23-502 **Route:** 0015 (A00015)
Location: I-15, South of Nephi
Accum. Mileage: 206.63

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	7205	6974	5489	5830	5868	7612	6426	6493	6343	102.4	72.4
FEBRUARY	8571	7557	5643	6326	7039	9685	7655	7496	7250	103.4	83.6
MARCH	10624	6964	6747	7500	8537	10323	8542	8494	8115	104.7	94.7
APRIL	11686	8168	7006	8293	10313	11334	9296	9512	9023	105.4	106.1
MAY	10490	9372	7060	7500	8707	11736	9671	9099	8758	103.9	101.5
JUNE	12446	8671	8173	9162	9943	12782	10941	10373	9893	104.9	115.7
JULY	12261	9627	9514	9411	9890	12420	12390	10849	10146	106.9	121.0
AUGUST	13049	8879	8385	8981	10050	12449	11670	10363	9669	107.2	115.6
SEPTEMBER	10292	9399	7041	7136	7782	11817	9264	9067	8786	103.2	101.1
OCTOBER	9961	7613	6876	7424	8633	11048	8523	8541	8221	103.9	95.3
NOVEMBER	20828	7149	5952	6158	6317	9138	11779	9392	6879	136.5	104.8
DECEMBER	7835	5815	6179	7175	8704	10667	7874	7851	7849	100.0	87.6
DAILY AVERAGE FOR YEAR	11131	8045	7001	7572	8500	10954	9518	8966	8414	106.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	124.1	89.7	78.1	84.5	94.8	122.2	106.2				

Station: 41-503 **Route:** 0089 (A00089)
Location: SR 89, In Salina
Accum. Mileage: 193.32

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2281	3694	3892	4098	4078	4310	3000	3589	3994	89.9	77.2
FEBRUARY	2347	3544	3515	3822	3872	4332	3247	3525	3817	92.4	75.9
MARCH	2864	3581	3655	3710	3928	4486	3721	3739	3894	96.0	80.5
APRIL	3463	4539	4447	4919	4941	5381	4128	4495	4845	92.8	96.7
MAY	3763	4914	5140	5089	5607	6075	4715	5044	5324	94.7	108.5
JUNE	3890	5236	5442	5605	5740	6327	4732	5332	5703	93.5	114.7
JULY	4639	5834	5498	6105	6191	6754	5819	5795	6065	95.5	124.7
AUGUST	4481	5174	5544	5511	5691	5953	5078	5370	5576	96.3	115.6
SEPTEMBER	3929	5016	5224	5450	5590	6219	4722	5184	5534	93.7	111.6
OCTOBER	4149	4727	4895	5118	5579	5900	4470	4939	5204	94.9	106.3
NOVEMBER	3434	4196	4328	4553	4852	6264	4818	4640	4826	96.1	99.8
DECEMBER	2584	4054	4433	4676	4580	4854	3417	4040	4535	89.1	86.9
DAILY AVERAGE FOR YEAR	3479	4562	4683	4875	5054	5564	4338	4647	4947	93.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	74.9	98.2	100.8	104.9	108.8	119.7	93.4				

Station: 31-504 **Route:** 0089 (A00089)
Location: SR 89, South of Circleville
Accum. Mileage: 156.98

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	568	637	573	538	583	697	633	603	605	99.7	50.6
FEBRUARY	756	712	618	640	744	855	880	744	714	104.2	62.4
MARCH	731	619	840	832	961	1240	782	873	913	95.6	73.2
APRIL	1144	1149	994	1096	1399	1486	1145	1198	1225	97.8	100.5
MAY	1431	1596	1293	1265	1295	1589	1509	1421	1405	101.1	119.2
JUNE	1643	1509	1490	1591	1590	1811	1641	1616	1607	100.6	135.6
JULY	1866	1688	1662	1665	1689	1910	1993	1788	1721	103.9	150.0
AUGUST	1845	1520	1585	1573	1641	1782	1764	1666	1617	103.0	139.8
SEPTEMBER	1421	1482	1312	1225	1340	1622	1449	1416	1407	100.6	118.8
OCTOBER	1369	1141	1148	1199	1289	1462	1304	1268	1238	102.4	106.4
NOVEMBER	1003	791	830	915	831	955	979	899	865	103.9	75.4
DECEMBER	625	656	751	804	828	952	814	777	805	96.5	65.2
DAILY AVERAGE FOR YEAR	1192	1136	1096	1115	1188	1367	1249	1192	1180	101.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	100.0	95.3	91.9	93.5	99.7	114.7	104.8				

Station: 21-505 **Route:** 0015 (A00015)
Location: I-15, North of Paragonah
Accum. Mileage: 82.39

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	8736	8523	6903	7173	7395	9327	7956	8007	7850	102.0	74.3
FEBRUARY	10120	8684	6998	7698	8785	11591	9690	9081	8751	103.8	84.3
MARCH	12459	8179	8452	9183	10430	12338	10855	10308	9838	104.8	95.7
APRIL	13371	9395	8700	9775	11432	13083	11273	11092	10477	105.9	103.0
MAY	11821	10814	8919	9435	10878	13448	11144	10807	10572	102.2	100.3
JUNE	14349	10692	10484	11404	12396	15050	13279	12602	12161	103.6	117.0
JULY	14719	11031	11054	11488	12300	14626	14077	12806	12049	106.3	118.9
AUGUST	15234	10923	10855	11384	12656	14704	13971	12703	12043	105.5	117.9
SEPTEMBER	12460	10935	9183	9646	10479	13403	11650	11202	10857	103.2	104.0
OCTOBER	13156	8862	9118	9969	11388	13094	10639	10840	10350	104.7	100.6
NOVEMBER	13964	7552	8305	10669	9365	10854	10670	10185	9410	108.2	94.5
DECEMBER	8707	6717	9146	9531	10100	11537	10590	9553	9508	100.5	88.7
DAILY AVERAGE FOR YEAR	12360	9393	9005	9809	10678	12780	11361	10774	10333	104.3	
% DAILY AVE. OF YEAR DAILY AVERAGE	114.7	87.2	83.6	91.0	99.1	118.6	105.4				

Station: 37-506 **Route:** 0191 (A00191)
Location: SR 191, South of Bluff
Accum. Mileage: 21.33

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1054	1237	1297	1186	1147	1313	1163	1199	1239	96.8	65.1
FEBRUARY	1301	1352	1319	1318	1334	1475	1371	1353	1359	99.6	73.5
MARCH	1623	1572	1605	1619	1673	1872	1784	1682	1675	100.4	91.4
APRIL	1755	1811	1809	1751	1958	2049	1955	1869	1875	99.7	101.5
MAY	2120	2055	2020	2030	2105	2334	2265	2123	2099	101.1	115.3
JUNE	2154	2120	2113	2138	2330	2380	2250	2222	2229	99.7	120.7
JULY	2234	2418	2183	2262	2370	2382	2403	2325	2327	99.9	126.3
AUGUST	2245	2296	2286	2215	2348	2498	2402	2323	2323	100.0	126.2
SEPTEMBER	2282	2284	2172	2133	2223	2545	2438	2310	2284	101.1	125.5
OCTOBER	1868	1806	1744	1828	1972	2034	1870	1868	1867	100.1	101.5
NOVEMBER	1519	1418	1418	1557	1416	1537	1451	1475	1471	100.3	80.1
DECEMBER	1131	1114	1323	1308	1416	1503	1390	1315	1341	98.1	71.4
DAILY AVERAGE FOR YEAR	1758	1797	1779	1785	1864	2000	1907	1841	1845	99.8	
% DAILY AVE. OF YEAR DAILY AVERAGE	95.5	97.6	96.6	97.0	101.2	108.6	103.6				

Station: 07-507 **Route:** 0006 (A00006)
Location: SR 6, Northwest of Price
Accum. Mileage: 224.99

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6088	8354	8282	8522	8420	9405	7621	8048	8572	93.9	76.0
FEBRUARY	7254	9033	8659	8956	9358	10776	8678	8959	9356	95.8	84.6
MARCH	8597	9641	9551	9857	10227	11769	9517	9951	10262	97.0	93.9
APRIL	9606	10196	9855	10411	11333	12676	10195	10563	10894	97.0	99.7
MAY	10060	11582	10657	10764	11557	13768	11041	11313	11579	97.7	106.8
JUNE	11029	12049	11424	12186	12723	14199	12285	12350	12602	98.0	116.6
JULY	9974	11773	11343	11983	12156	14151	12309	11897	12257	97.1	112.3
AUGUST	11098	11996	11515	11949	12489	14134	12310	12191	12360	98.6	115.1
SEPTEMBER	10126	11116	10951	11143	11746	13888	11292	11541	11870	97.2	108.9
OCTOBER	9854	10595	10532	10890	11705	13110	10348	10939	11293	96.9	103.2
NOVEMBER	8750	9887	9173	10736	9897	10755	9491	9846	10110	97.4	92.9
DECEMBER	7175	8397	9654	9765	9932	11481	9798	9460	9924	95.3	89.3
DAILY AVERAGE FOR YEAR	9078	10400	10142	10615	10991	12534	10445	10596	10936	96.9	
% DAILY AVE. OF YEAR DAILY AVERAGE	85.7	98.2	95.7	100.2	103.7	118.3	98.6				

Station: 41-508 **Route:** 0070 (A00070)
Location: SR 70, Northeast of South Richfield Interchange
Accum. Mileage: 37.29

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2317	2514	2264	2294	2288	2591	2517	2395	2390	100.2	66.4
FEBRUARY	2535	2330	2229	2321	2510	2914	2855	2528	2461	102.7	70.1
MARCH	3068	2574	2777	2933	3189	3509	3637	3109	3024	102.8	86.2
APRIL	3358	2847	2909	3155	3580	3658	3616	3315	3230	102.6	91.9
MAY	3915	3832	3475	3626	4154	4449	4136	3912	3873	101.0	108.5
JUNE	4687	4062	4257	4372	4665	5106	4867	4594	4528	101.5	127.4
JULY	5156	4488	4620	4714	4951	5308	5951	5043	4800	105.1	139.9
AUGUST	5054	4276	4428	4559	4851	5235	5323	4798	4662	102.9	133.1
SEPTEMBER	3982	3826	3688	3760	4000	4476	4256	4023	3975	101.2	111.6
OCTOBER	3640	3160	3226	3620	4073	4022	3632	3597	3581	100.4	99.8
NOVEMBER	3376	2570	2595	3127	2928	3003	3336	2993	2861	104.6	83.0
DECEMBER	2381	2150	2867	2958	3081	3351	3271	2879	2904	99.1	79.8
DAILY AVERAGE FOR YEAR	3599	3241	3283	3462	3706	3979	3975	3606	3534	102.0	
% DAILY AVE. OF YEAR DAILY AVERAGE	99.8	89.9	91.0	96.0	102.8	110.3	110.2				

Station: 51-509 **Route:** 0040 (A00040)
Location: SR 40, North of Midway
Accum. Mileage: 6.04

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	6883	8753	8189	8468	8460	9643	10122	8577	8682	98.8	74.6
FEBRUARY	8413	9211	7893	8840	9084	10516	10467	9203	9109	101.0	80.1
MARCH	7717	8784	8823	9170	9147	10172	9091	9036	9255	97.6	78.6
APRIL	8193	8968	9102	9359	9788	10545	9684	9348	9552	97.9	81.4
MAY	11213	11293	9583	10001	10256	12298	12631	10967	10635	103.1	95.4
JUNE	13690	11842	11827	12126	12519	15220	15511	13289	12812	103.7	115.7
JULY	16995	14899	13942	13613	14493	17215	18570	15786	14836	106.4	137.4
AUGUST	16311	13285	13357	13592	14652	17585	19577	15324	14412	106.3	133.4
SEPTEMBER	13897	13644	11497	11725	12149	16406	17429	14027	13242	105.9	122.1
OCTOBER	11706	10760	10697	11380	11326	13979	13405	11812	11547	102.3	102.8
NOVEMBER	8462	9520	9540	10806	9963	11789	11363	10218	10329	98.9	88.9
DECEMBER	8137	8843	9971	10435	10428	11862	10866	10098	10382	97.3	87.9
DAILY AVERAGE FOR YEAR	10913	10864	10375	10801	11064	13127	13296	11490	11246	102.2	
% DAILY AVE. OF YEAR DAILY AVERAGE	95.0	94.6	90.3	94.0	96.3	114.2	115.7				

Station: 05-510 **Route:** 0218 (A00218)
Location: SR 218, West of Smithfield
Accum. Mileage: 5.70

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	1973	3222	3448	3453	3512	3864	3481	3240	3485	93.0	88.5
FEBRUARY	2084	3519	3521	3597	3736	4001	3629	3441	3675	93.6	94.0
MARCH	2080	3622	3506	3622	3804	4062	3314	3469	3737	92.8	94.7
APRIL	2206	3860	3768	3803	4037	4170	3883	3633	3928	92.5	99.2
MAY	2592	4057	4243	4230	4322	4329	4465	4048	4228	95.7	110.5
JUNE	2527	4216	4310	4230	4354	4413	4430	4090	4312	94.9	111.7
JULY	2405	4121	3988	4252	4346	4379	4087	3901	4213	92.6	106.5
AUGUST	2362	3958	4289	4064	4170	4768	4291	4004	4240	94.4	109.3
SEPTEMBER	2288	3632	3903	3963	3984	4216	3800	3705	3952	93.8	101.2
OCTOBER	2203	3794	3843	3709	3834	4096	3621	3556	3852	92.3	97.1
NOVEMBER	2058	3626	3581	3760	3446	3866	3637	3437	3651	94.1	93.9
DECEMBER	2184	3329	3546	3671	3725	3954	3591	3411	3660	93.2	93.1
DAILY AVERAGE FOR YEAR	2242	3750	3839	3867	3940	4175	3851	3662	3914	93.6	
% DAILY AVE. OF YEAR DAILY AVERAGE	61.2	102.4	104.8	105.6	107.6	114.0	105.2				

Station: 05-511 **Route:** 0237 (A00237)
Location: SR 237, 800 East 2416 North in North Logan
Accum. Mileage: 1.39

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	2116	3823	3966	3880	3792	3947	3370	3532	3883	91.0	84.0
FEBRUARY	2115	3838	3753	3981	3863	3822	3138	3501	3851	90.9	83.2
MARCH	2077	3775	3767	3815	3936	3948	3084	3526	3855	91.5	83.8
APRIL	2267	4330	4164	4568	4373	4214	3779	3894	4330	89.9	92.6
MAY	2750	4552	4914	5081	5032	4926	4288	4539	4894	92.7	107.9
JUNE	2672	4603	5076	4793	5111	5011	4198	4532	4931	91.9	107.8
JULY	2915	4711	4991	5677	5734	5493	4447	4772	5292	90.2	113.5
AUGUST	2971	4795	5081	5779	5838	5593	4527	5001	5437	92.0	118.9
SEPTEMBER	2679	4476	4561	4838	4737	4837	4202	4345	4697	92.5	103.3
OCTOBER	2759	4932	4786	5066	4940	5190	4614	4569	4971	91.9	108.6
NOVEMBER	2514	4718	4818	4788	4225	4492	3796	4214	4599	91.6	100.2
DECEMBER	2597	4073	4415	4516	4423	4511	3683	3989	4393	90.8	94.8
DAILY AVERAGE FOR YEAR	2536	4395	4537	4742	4676	4659	3935	4206	4602	91.4	
% DAILY AVE. OF YEAR DAILY AVERAGE	60.3	104.5	107.9	112.7	111.2	110.8	93.6				

Station: 35-711 **Route:** 0154 (A00154)
Location: SR 154, Bangerter Highway South of 2400 South
Accum. Mileage: 18.69

MONTH	AVERAGE DAILY NUMBER OF VEHICLES									% THE AVERAGE DAY IS OF THE AVERAGE WEEKDAY	% THE MONTH DAILY AVERAGE IS OF THE YR. DAILY AVE.
	DAY OF THE WEEK							AVERAGE DAY SUN. THRU SATURDAY	AVERAGE WEEKDAY MON. THRU FRIDAY		
	SUN	MON	TUE	WED	THU	FRI	SAT				
JANUARY	20154	37868	42000	43004	42477	44778	30465	36871	41835	88.1	92.8
FEBRUARY	22232	41933	41727	43539	44081	46263	30636	38630	43509	88.8	97.3
MARCH	22829	44090	44314	44759	44670	46879	30897	40324	45007	89.6	101.5
APRIL	23510	44726	45005	45165	45946	46750	31644	39538	45518	86.9	99.6
MAY	23904	41137	44851	45594	45909	47323	31670	40424	44819	90.2	101.8
JUNE	24637	45293	45884	46279	47068	48040	32726	41827	46608	89.7	105.3
JULY	23771	42333	40688	46000	47067	47464	31419	39113	44597	87.7	98.5
AUGUST	24483	45898	46229	46438	47513	48440	32405	42123	46881	89.9	106.1
SEPTEMBER	23269	39826	45413	47584	46729	47612	32308	40363	45537	88.6	101.6
OCTOBER	22663	43756	44842	45121	45554	47197	31394	39786	45204	88.0	100.2
NOVEMBER	21711	44496	44293	45478	40592	43313	30568	38929	43580	89.3	98.0
DECEMBER	22862	39020	43003	44603	45129	47536	31469	38592	44033	87.6	97.2
DAILY AVERAGE FOR YEAR	22963	42435	44056	45318	45207	46855	31485	39714	44774	88.7	
% DAILY AVE. OF YEAR DAILY AVERAGE	57.8	106.9	110.9	114.1	113.8	118.0	79.3				

APPENDIX A

Cross Reference Guide For City Streets

1995

Cross Reference Guide for Streets in the Salt Lake, Ogden, Provo, and Other Areas

SALT LAKE CITY AREA

Street Name	State Route No.	F.A.S. & F.A.U. No.
8400 West	A00111	---
7200 West	---	0111 & 1089
5600 W. (Eddie Rickenbaker Rd.)	A00172	1006
4800 West	---	1091
4000 West (Bangerter Highway)	A00154	1005
3600 West	---	1082
3200 West	---	1087
2700 West	---	1009
2200 West	---	1065
Redwood Road (1700 West)	A00068	---
1300 West	---	1013
900 West	---	1015
700 West (Murray-Midvale)	A00048	1015
300 West & Beck Street	A00089 & A00186	1017
West Temple	A00270	1031
Main Street	---	1036
State Street & Victory Road	A00089 & A00184	---
"B" Street	---	1035
280 East, Murray	---	1039
500 East & "E" Street	---	1037
700 East & "I" Street	A00071	1041

SALT LAKE CITY AREA CONT.

Street Name	State Route No.	F.A.S. & F.A.U. No.
Van Winkle Expressway	A00152	---
7th East South of 7800 South	A00071	---
900 East	A00071	1043
1300 East & Virginia Street	A00181	1047
Highland Drive (2000 East)		
1100 East Sugarhouse	A00152	1049
Guardsman Way	---	1051
2100 East & 2000 East	---	1053
2300 East	A00195	1055 & 1095
1700 East	---	1075
900 East & 1000 East in Draper	---	1097
Foothill Boulevard	A00186	---
Union Park Ave. (1100 East)	---	1098
Wasatch Boulevard	A00210	---
14400 South	A00140	1084
12300 South & 12600 South	A00071	0135 & 1004
11400 South	---	1088
10600 South (10400 South)	A00151	1008
9800 South (Sego Lilly Drive)	---	1085
9400 South	A00209	1090
9000 South	A00209	1012
8600 South	---	1094
7800 South (West)	A00048	1014
7800 South (East)	---	1014 & 1016
Little Cottonwood Creek Road	---	1093

SALT LAKE CITY AREA CONT.

Street Name	State Route No.	F.A.S. & F.A.U. No.
7200 South & 7000 South	A00048	1018 & 1092
6400 South & 6600 South	---	1020
5900, 6100, & 6200 South	---	1022
5600 South	---	1010
5400 South, 5300 South, & Vine Street	A00173	1026
4700 South & 4500 South	A00266	1028
4100 South & 3900 South	---	0600 & 1030
3500 South & 3300 South	A00171	---
3100 South	---	1096
2700 South (West)	---	1083
2700 South (East)	---	1034
2100 South (West)	A00201	---
2100 South (East) & Parleys Way	---	1038
1700 South	---	1040
1300 South	---	1042
California Avenue	---	0156 & 1042
Indiana Avenue, 900 South, & Sunnyside Avenue	---	1044
500 South & 600 South	A00269	1046
500 South, 400 South, & Foothill Boulevard	A00186	1050
Wakara Way	---	1052
Medical Drive & Hempstead	A00282	---
200 South	---	1060

SALT LAKE CITY AREA CONT.

Street Name	State Route No.	F.A.S. & F.A.U. No.
100 South	---	1054
South Temple	---	1046
North Temple, 2nd Avenue, & 3rd Avenue	A00186 & A00089	1050
300 North	---	1062
600 North, 700 North, & 11th Avenue	A00268	1064
1000 North	---	1066
2200 North & 2400 North	---	1068

WOODS CROSS, BOUNTIFUL, & CENTERVILLE AREA

800 West	---	1078
500 West	A00089	---
200 West	A00106	---
Main Street & Shepards Lane	A00106	1023
Orchard Drive	---	1027
Davis Boulevard	---	1029
Parrish Lane	A00105	1070
Chase Lane	---	1027
Center Street	---	1072
3100 South	---	1071
2600 South	A00093	1074
1500 South & 1800 South	---	1063
500 South	A00068	1076
400 North	A00131 & A00106	1078

KAYSVILLE AREA

Street Name	State Route No.	F.A.S. & F.A.U. No.
200 North	A00273	2002
Main Street	A00273	2005
Fairfield Road	---	2061
1000 South	---	2039

LAYTON AREA

Gentile Street	A00109	2004
Gordon Avenue (1000 North)	---	2006
Syracuse Road		
(2000 North & Antelope Drive)	A00108 & A00127	2008
400 West (Hill Field Road)	A00232	---
Mutton Hollow Road	---	2025
1900 West & Main Street	A00126 & A00273	2061

CLEARFIELD AREA

700 South & Main	A00193	2010
300 North	A00107	---
1000 West	---	2063
200 South	---	2066

SUNSET, CLINTON, & ROY AREAS

3500 West	A00108 & A00053	2001
Main Street	A00126 & A00273	2005
800 North (1900 West Approx.)	---	2064
1800 North & Clinton Road	A00037	---

SUNSET, CLINTON, & ROY AREAS

Street Name	State Route No.	F.A.S. & F.A.U. No.
5600 South & 5500 South	A00097 & A00098	---
4000 South & 5600 West	A000 37	2030
6000 South	---	2056

OGDEN AREA

Wall Avenue	A00204	---
Lincoln Avenue & Grant Avenue	---	2015
Washington Boulevard	A00089 & A00235	---
Adams Avenue	---	2021 & 2073
Jefferson Avenue	---	2023
Quincy Avenue, Sullivan Road, & Monroe Avenue	---	2027
Harrison Boulevard	A00203	2033
Skyline Drive	---	2035
South Weber Connection	---	2031
South Weber Drive	A00060	---
Riverdale Road	A00026	---
4600 South	---	2026
4400 South	---	2022
40th Street	---	2028
36th Street	---	2032
31st Street	A00079	---
30th Street	A00079	---
24th Street	A00053	2001

OGDEN AREA CONT.

Street Name	State Route No.	F.A.S. & F.A.U. No.
20th Street, 21st Street, & Wilson Lane	A00104	---
12th Street	A00039	0567
2nd Street	---	2042

NORTH OGDEN AREA

Washington Boulevard	A00089 & A00235	2017
Monroe Avenue	---	2027
Harrison Boulevard	A00203	2033
1100 North (Larsen Lane)	---	2046
1700 North	---	2048
2550 North & 2600 North	A00235	2050
3100 North	---	2052
Pleasant View Road	---	2058
Elberta Drive	---	2054

SPANISH FORK AREA

300 South	A00006	---
400 North	A00147	---
Road to Springville	A00051	---
Main Street	A00006 & A00156	---
Moark Connector	A00214	---
100 South	A00115	---

SPRINGVILLE AREA

South Main	A00051	---

SPRINGVILLE AREA

Street Name	State Route No.	F.A.S. & F.A.U. No.
Main Street	A00089	---
400 East	---	3071
1300 East	---	3077
800 South & 900 South	---	3002
400 South	A00077	3004
Center Street	---	3006

PROVO AREA

Airport Road	---	3029
2050 West	A00114	---
1200 West	---	3025
1225 West & 2100 West	---	3039
500 West (North)	A00089	---
200 West & Freedom Boulevard	---	3045
University Parkway (BYU Diagonal)	A00265	3034,3040
University Avenue	A00189	---
Canyon Road	---	3051
650 East	---	3053
900 East	---	3055
Bonneville Drive	---	3059
300 South	A00089	---
Center Street	A00114	3024
700 North	---	3026
820 North & 800 North	---	3030

PROVO AREA CONT.

Street Name	State Route No.	F.A.S. & F.A.U. No.
1230 North	---	3032
1650 North	---	3034
1800 North & 1700 North	---	3057
BYU Diagonal	A00265	3034
2200 North	---	3055
2230 North	---	3036

OREM AREA

1200 West	---	3025
400 West	---	3033
Main Street	---	3039
State Street	A00089	---
800 East	---	3041
BYU Diagonal	A00265	3034
University Avenue	A00189	---
Canyon Road	---	3051
Bonneville Drive	---	3059
1200 South	---	3023
800 South	---	3042
Center Street	---	3046
400 North (Geneva Road)	---	3050
800 North	A00052	---
1600 North	A00241	3041 & 3052

AMERICAN FORK, PLEASANT GROVE, & LINDON AREAS

Street Name	State Route No.	F.A.S. & F.A.U. No.
100 West in American Fork	---	3003
100 East in American Fork	A00074	---
500 East in American Fork	A00180	3013
Main Street in American Fork	---	3064
4650 West	---	0601 & 3015
Main Street to FAI-15 in American Fork	A00145	---
Main Street	A00089	---
700 North in American Fork	---	3078
Main Street in Pleasant Grove	A00146	---
400 East in Lindon &		
1500 East in Pleasant Grove	---	3031
200 South in Pleasant Grove	---	3056
500 North in Pleasant Grove	---	3062

RICHFIELD

Road to Annabella	---	0315 & 1102
Road to Elsinore	A00118 & A00258	---
Main Street	A00118 & A00120	---
300 North	A00118 & A00119	---
Road to Sigurd	A00118	---
Road to Salina	A00024	---

LEHI

Street Name	State Route No.	F.A.S. & F.A.U. No.
Road to Saratoga	---	0205 & 1401
Main Street	A00073	---
500 West Street	A00197	---

ST. GEORGE

700 East	---	0415 & 4001
Sunset Boulevard (Road to Santa Clara)	---	0416 & 4002
Bluff Street	A00018	---
St. George Boulevard	A00034	---

LOGAN

6th East, 10th North, & 8th East	---	5003
400 North	A00089	---
Main Street	A00091	---
1000 West	---	0553 & 5001
1400 North	A00239	---

PRICE

Carbon Avenue	A00010	0331 & 7001
Road to Price Airport	---	0299 & 7004
Old FAS-298	---	0298 & 7003
100 North, 300 East, & Main Street	A00055	---
Price Bypass	A00006	---

TOOELE

Street Name	State Route No.	F.A.S. & F.A.U. No.
200 North (East)	---	0102 & 8004
Main Street	A00036	---
Road to Grantsville	A00112	---
Grantsville to Mills Junction	A00138	---

BRIGHAM CITY

Forest Street	---	0523 & 9002
Main Street	A00013	---
200 South	A00090	---
1300 South	A00091	---
Road through Willard & Perry	A00089	---

CEDAR CITY

Main Street	A00130	---
Center Street at Southern Utah State College	A00289	---
Center Street (East)	A00114	---
200 North	A00056	---

APPENDIX B

Abbreviation Index

1995

ABBREVIATION INDEX

ABBREV	DEFINITION
-A-	
ADM	Administration
AF	American Fork
AFB	Air Force Base
AM	American
APPROX	Approximately
AV	Avenue
AVE	Avenue
-B-	
BEG	Beginning
BEGIN	Beginning
BLDG	Building
BLVD	Boulevard
BND	Bound
BNDRY	Boundary
BRDG	Bridges
BRKS	Breaks
BOUNT	Bountiful
-C-	
C	Constructed
CALIF	California
CAN	Canyon
CC	City Center
CED	Cedar
CEU	College of Eastern Utah
CL	County Line
CNTR	Center
CO	County
CONST	Constructed
CR	Creek
CRK	Creek
-D-	
DOUG	Douglas

ABBREV	DEFINITION
-D cont.-	
DR	Drive
DWYLE	Deweyville
-E-	
E	East
EA	East
EB	Eastbound
-F-	
FAI	Federal-Aid Interstate
FAP	Federal-Aid Primary
FAU	Federal-Aid Urban
-G-	
GR	Grove
GRNDS	Grounds
-H-	
HAFB	Hill Air Force Base
HNYVLE	Honeyville
-I-	
INC	Incorporated
INST	Institution
INT	Interchange
INTER	Interchange
INTERCH	Interchange
-J-	
JCT	Junction

ABBREV	DEFINITION
-L-	
LN	Lane
LR	Local Road
-M-	
MI	Mile
MON	Monument
MT	Mountain
MTN	Mountain
-N-	
N	North
NAT	National
NAT	Natural
NB	Northbound
NE	Northeast
NFB	National Forest Bound
NM	National Monument
NO	North
NW	Northwest
-P-	
PL GROVE	Pleasant Grove
PL VIEW	Pleasant View
PROMONT	Promontory
PROP	Proposed
PROV GRDS	Proving Grounds
PT	Point
-R-	
RB	River Bridge
RD	Road
RDS	Roads
REC	Recreation
RES	Reservoir
RIVRDLE	Riverdale
RS	Ranger Station
RT	Route
-S-	
S	South

ABBREV	DEFINITION
-S cont.-	
SB	Southbound
SE	Southeast
SEC	Section
SL	Salt Lake
SL	State Line
SLC	Salt Lake City
SO	South
SP Fork	Spanish Fork
SPG	Spring
SPRINGVL	Springville, UT
SR	State Route
ST	State
ST	Street
SW	Southwest
-T-	
TAD	Tooele Army Depot
TW	Traveled Way
-U-	
U of U	University of Utah
UNCON	Unconstructed
UNCONST	Unconstructed
UNIV	University
URB	Urban
USU	Utah State University
UT	Utah
-W-	
W	West
WASH	Washington
WDS	Woods
WOODSX	Woodscross,UT
WV	West Valley,UT
WYO	Wyoming
-X-	
X	Cross

APPENDIX C

Reference Contacts

1995

Traffic Statistics

John Wood	**965-4383**
Roger Carr	**965-4143**
Vicki Hanshew	**965-4737**
Ron Phillips	**965-4527**
Tammy Kaeser	**965-4137**

Truck Statistics

Ron Phillips	**965-4527**
Tammy Kaeser	**965-4137**

Road Statistics/ Highway Performance Monitoring System

Lee Theobald	**965-4136**
Tammy Kaeser	**965-4137**

Location Reference Information

Glen Nielsen	**965-4349**
Marva Braun	**965-4375**
Leland Harper	**965-4135**
Tammy Kaeser	**965-4137**

NOTES